

Job Name: _____
 Purchaser: _____
 Submitted To: _____
 Submitted By: _____
 Unit Designation: _____

Location: _____
 Engineer: _____
 For: Reference Approval Construction
 Date: _____

Technical Specification:

Features:

Remote Alarm Output	Yes
Bivalent operation (Permission signal for the auxiliary boiler)	Yes
Solar Domestic Hot Water priority mode	Yes

Typical Connection:

Alarm On/Off Output	X7M terminal 1-2
Heating/Cooling On/Off Output	X7M terminal 3-4
Solar Input	X7M terminal 5-6

Solar priority mode setting:

Contact for "Changeover signal (Voltage free contact)	Activation: X1-X2 is closed
The logic of the output signal for the solarkit model	X3-X4



Standard Features:

Parts warranty	5 years
Limited labor warranty	1 year

Electrical Specification:


Power supply	24 VAC
--------------	--------

•All wires have terminal numbers imprinted comes with EGRP1HB adapter board (K5A, K6A, K7A, X7M)

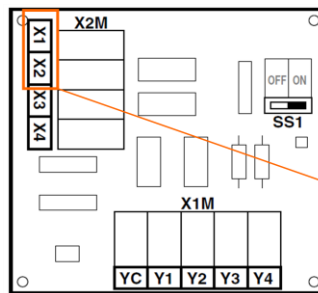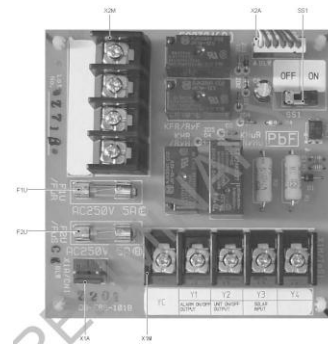


Solar priority mode setting


Contact for "changeover" signal (voltage free contact)
Activation: X1-X2 is closed

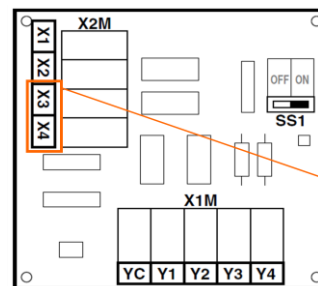

X3-X4 follows the logic of the output signal for the solarkit model. (EKSOLHW)

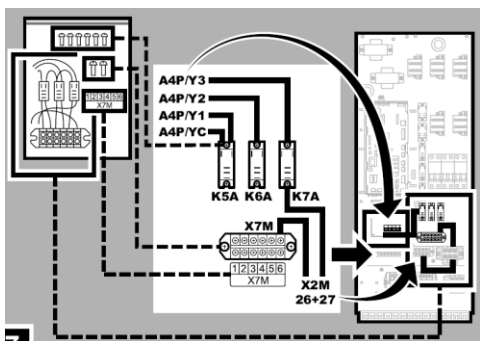

For Hydrobox Installation

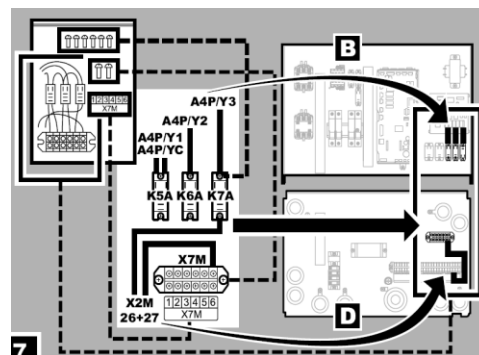

For Monobloc Installation

For further information about the installation, please refer to the Installation manual 4PW56393-1 and Engineering Guides