



EDUS 391006 - R2

R-410A

Engineering Data



REYQ-P(B)
3 phase
208/230V, 60Hz

DAIKIN AC (AMERICAS), INC.

REYQ-P

Heat Recovery

3 phase

208/230V, 60Hz

1. Specifications	2
2. Dimensions	6
3. Service Space	10
4. Piping Diagrams.....	11
5. Wiring Diagrams.....	15
6. Field Wiring	19
7. Electric Characteristics.....	22
8. Capacity Tables (Reference Data).....	25
8.1 Cooling Capacity (REYQ-P)	25
8.2 Heating Capacity (REYQ-P).....	37
8.3 Capacity Correction Factor.....	49
9. Operation Limits	55
10.Low Ambient Cooling Enhancement	56
11.Accessories.....	57

1. Specifications

Model Name			REYQ72PTJU	REYQ96PTJU	REYQ120PTJU	REYQ144PBTJ
Power Supply			3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz
★1 Cooling Capacity	Nominal	Btu / h	72,000	96,000	120,000	144,000
	Rated		69,000	92,000	114,000	138,000
★2 Heating Capacity	Nominal	Btu / h	81,000	108,000	135,000	162,000
	Rated		77,000	103,000	129,000	154,000
Casing Color			Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)
Dimensions: (HxWxD)		in. (mm)	66-1/8 x 51-3/16 x 30-1/8 (1680 x 1300 x 765)	66-1/8 x 51-3/16 x 30-1/8 (1680 x 1300 x 765)	66-1/8 x 51-3/16 x 30-1/8 (1680 x 1300 x 765)	66-1/8 x 51-3/16 x 30-1/8 (1680 x 1300 x 765)
Heat Exchanger			Cross Fin Coil	Cross Fin Coil	Cross Fin Coil	Cross Fin Coil
Comp.	Type		Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type
	Displacement	m ³ /h	7.88+10.53	13.34+10.53	13.34+10.53	16.90+16.90
	Number of Revolutions	r/min	3720, 2900	6300, 2900	6300, 2900	7980, 7980
	Motor OutputxNumber of Units	kW	(1.0+4.5) × 1	(2.2+4.5) × 1	(3.3+4.5) × 1	(3.8+3.8) × 1
	Starting Method		Soft Start	Soft Start	Soft Start	Soft Start
Fan	Type		Propeller Fan	Propeller Fan	Propeller Fan	Propeller Fan
	Motor Output	kW	(0.35) × 2	(0.35) × 2	(0.35) × 2	(0.75) × 2
	Airflow Rate	cfm	6,700	6,700	7,410	8,300
	Drive		Direct Drive	Direct Drive	Direct Drive	Direct Drive
Connecting Pipes	Liquid Pipe	in. (mm)	φ3/8 (9.5) C1220T (Flare Connection)	φ3/8 (9.5) C1220T (Flare Connection)	φ1/2 (12.7) C1220T (Flare Connection)	φ1/2 (12.7) C1220T (Flare Connection)
	Suction Gas Pipe	in. (mm)	φ3/4 (19.1) C1220T (Brazing Connection)	φ7/8 C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6)C1220T (Brazing Connection)
	High and Low Pressure Gas Pipe	in. (mm)	φ5/8 (15.8) C1220T (Brazing Connection)	φ3/4 (19.1) C1220T (Brazing Connection)	φ3/4 (19.1)C1220T (Brazing Connection)	φ7/8 C1220T (Brazing Connection)
Mass		Lbs (kg)	730 (331)	730 (331)	730 (331)	747 (339)
Safety Devices			High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector
Defrost Method			Deicer	Deicer	Deicer	Deicer
Capacity Control		%	20~100	14~100	14~100	10~100
Refrigerant	Refrigerant Name		R-410A	R-410A	R-410A	R-410A
	Charge	Lbs (kg)	22.7 (331)	23.4 (10.6)	23.8 (10.8)	24.5 (11.1)
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Standard Accessories			Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps
Drawing No.			C: 4D070742	C: 4D070744	C: 4D070745	C: 4D070749

Notes:

- ★1 Indoor temp. : 80°FDB(27°CDB), 67°FWB(19.4°CWB) / outdoor temp. : 95°FDB (35°CDB) / Equivalent piping length : 25ft (7.5 m), level difference : 0 ft.
 ★2 Indoor temp. : 70°FDB(21°CDB) / outdoor temp. : 47°FDB, 43°FWB (8.3° CDB, 6° CWB) / Equivalent piping length : 25ft (7.5 m), difference : 0 ft.

Model Name (Combination Unit)			REYQ168PBTJ	REYQ192PBTJ	REYQ216PBTJ
Model Name (Independent Unit)			REMQR72PBTJ REMQR96PBTJ	REMQR96PBTJ REMQR96PBTJ	REMQR96PBTJ REMQR120PBTJ
Power Supply			3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz
★1 Cooling Capacity	Nominal	Btu / h	168,000	192,000	216,000
	Rated		160,000	184,000	206,000
★2 Heating Capacity	Nominal	Btu / h	188,000	216,000	243,000
	Rated		180,000	206,000	231,000
Casing Color			Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)
Dimensions: (HxWxD)		in	66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 (1680 × 930 × 765 + 1680 × 930 × 765)	66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 (1680 × 930 × 765 + 1680 × 930 × 765)	66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 (1680 × 930 × 765 + 1680 × 930 × 765)
Heat Exchanger			Cross Fin Coil	Cross Fin Coil	Cross Fin Coil
Comp.	Type		Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type
	Displacement	m ³ /h	16.90 + (10.53+13.34)	(10.53+13.34) × 2	(10.53+13.34) × 2
	Number of Revolutions	r/min	7980, (2900, 6300)	(2900, 6300) × 2	(2900, 6300) × 2
	Motor Output×Number of Units	kW	(4.7) × 1 + (2.2+4.5) × 1	(2.2+4.5) × 2	(2.2+4.5) × 1 + (3.5+4.5) × 1
	Starting Method		Soft Start	Soft Start	Soft Start
Fan	Type		Propeller Fan	Propeller Fan	Propeller Fan
	Motor Output	kW	(0.75) × 1 + (0.75) × 1	(0.75) × 1 + (0.75) × 1	(0.75) × 1 + (0.75) × 1
	Airflow Rate	cfm	6,350+6,530	6,530+6,530	6,530 + 7,060
	Drive		Direct Drive	Direct Drive	Direct Drive
Connecting Pipes	Liquid Pipe	in. (mm)	φ5/8(15.8) C1220T (Brazing Connection)	φ5/8(15.8) C1220T (Brazing Connection)	φ5/8(15.8) C1220T (Brazing Connection)
	Suction Gas Pipe	in. (mm)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)
	High and Low Pressure Gas Pipe	in. (mm)	φ7/8 (22.2) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)
	Pressure Equalizer Tube	in. (mm)	φ3/4 (19.1) C1220T (Brazing Connection)	φ3/4 (19.1) C1220T (Brazing Connection)	φ3/4 (19.1) C1220T (Brazing Connection)
Mass	Lbs (kg)	450 + 560 (204 + 254)	560 + 560 (254 + 254)	560 + 560 (254 + 254)	
Safety Devices			High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector
Defrost Method			Deicer	Deicer	Deicer
Capacity Control		%	9~100	7~100	7~100
Refrigerant	Refrigerant Name		R-410A	R-410A	R-410A
	Charge	Lbs (kg)	18.1+19.8 (8.2 + 9)	19.8 + 19.8 (9 + 9)	19.8+20.1 (9 + 9.1)
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Standard Accessories			Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps
Drawing No.			C: 4D070892	C: 4D070893	C: 4D070894

Notes:

★1 Indoor temp. : 80°FDB(27°CDB), 67°FWB(19.4°CWB) / outdoor temp. : 95°FDB (35°CDB) / Equivalent piping length : 25ft (7.5 m), level difference : 0 ft.

★2 Indoor temp. : 70°FDB(21°CDB) / outdoor temp. : 47°FDB, 43°FWB (8.3°CDB, 6°CWB) / Equivalent piping length : 25ft (7.5 m), difference : 0 ft.

Model Name (Combination Unit)			REYQ240PBTJ	REYQ264PBTJ	REYQ288PBTJ
Model Name (Independent Unit)			REMQ120PBTJ REMQ120PBTJ	REMQ72PBTJ REMQ96PBTJ REMQ96PBTJ	REMQ72PBTJ REMQ96PBTJ REMQ120PBTJ
Power Supply			3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz
★1 Cooling Capacity	Nominal	Btu / h	240,000	264,000	288,000
	Rated		240,000	251,000	274,000
★2 Heating Capacity	Nominal	Btu / h	270,000	297,000	324,000
	Rated		257,000	283,000	308,000
Casing Color			Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)
Dimensions: (HxWxD)		in. (mm)	66-1/8 x 36-5/8 x 30-1/8 + 66-1/8 x 36-5/8 x 30-1/8 (1680 x 930 x 765 + 1680 x 930 x 765)	66-1/8 x 36-5/8 x 30-1/8 + 66-1/8 x 36-5/8 x 30-1/8 + 66-1/8 x 36-5/8 x 30-1/8 (1680 x 930 x 765 + 1680 x 930 x 765 + 1680 x 930 x 765)	66-1/8 x 36-5/8 x 30-1/8 + 66-1/8 x 36-5/8 x 30-1/8 + 66-1/8 x 36-5/8 x 30-1/8 (1680 x 930 x 765 + 1680 x 930 x 765 + 1680 x 930 x 765)
Heat Exchanger			Cross Fin Coil	Cross Fin Coil	Cross Fin Coil
Comp.	Type		Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type
	Displacement	m ³ /h	(10.53+13.34) × 2	16.90 + (10.53+13.34) × 2	16.90 + (10.53+13.34) × 2
	Number of Revolutions	r/min	(2900, 6300) × 2	7980, (2900, 6300) × 2	7980, (2900, 6300) × 2
	Motor OutputxNumber of Units	kW	(3.5+4.5) × 2	(4.7) × 1 + (2.2+4.5) × 2	(4.7) × 1 + (2.2+4.5) × 1 + (3.5+4.5) × 1
	Starting Method		Soft Start	Soft Start	Soft Start
Fan	Type		Propeller Fan	Propeller Fan	Propeller Fan
	Motor Output	kW	(0.75) × 1 + (0.75) × 1	(0.75) × 1 + (0.75) × 1 + (0.75) × 1	(0.75) × 1 + (0.75) × 1 + (0.75) × 1
	Airflow Rate	cfm	7,060+7,060	6,350+6,530+6,530	6,350+6,530+7,060
	Drive		Direct Drive	Direct Drive	Direct Drive
Connecting Pipes	Liquid Pipe	in. (mm)	φ5/8 (15.8) C1220T (Brazing Connection)	φ3/4 (19.1)C1220T (Brazing Connection)	φ3/4 (19.1) C1220T (Brazing Connection)
	Suction Gas Pipe	in. (mm)	φ1-3/8 (35)C1220T (Brazing Connection)	φ1-3/8 (35)C1220T (Brazing Connection)	φ1-3/8 (35)C1220T (Brazing Connection)
	High and Low Pressure Gas Pipe	in. (mm)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)
	Pressure Equalizer Tube	in. (mm)	φ3/4 (19.1) C1220T (Brazing Connection)	φ3/4 (19.1)C1220T (Brazing Connection)	φ3/4 (19.1)C1220T (Brazing Connection)
Mass	Lbs (kg)	560 + 560 (254 + 254)	450+560+560 (204 + 254 + 254)	450+560+560 (204 + 254 + 254)	
Safety Devices			High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector
Defrost Method			Deicer	Deicer	Deicer
Capacity Control		%	6-100	6-100	5-100
Refrigerant	Refrigerant Name		R-410A	R-410A	R-410A
	Charge	Lbs (kg)	20.1 + 20.1 (9.1 + 9.1)	18.1+19.8+19.8 (8.2 + 9 + 9)	18.1 + 19.8 + 20.1 (8.2 + 9 + 9.1)
	Control		Electronic Expansion Valve	Electronic Expansion Valve	Electronic Expansion Valve
Standard Accessories			Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps
Drawing No.			C: 4D070895	C: 4D070898	C: 4D070899

Notes:

- ★1 Indoor temp. : 80°FDB(27°CDB), 67°FWB(19.4°CWB) / outdoor temp. : 95°FDB (35°CDB) / Equivalent piping length : 25ft (7.5 m), level difference : 0 ft.
- ★2 Indoor temp. : 70°FDB(21°CDB) / outdoor temp. : 47°FDB, 43°FWB (8.3° CDB, 6° CWB) / Equivalent piping length : 25ft (7.5 m), difference : 0 ft.


Model Name (Combination Unit)			REYQ312PBTJ	REYQ336PBTJ
Model Name (Independent Unit)			REMQ96PBTJ REMQ96PBTJ REMQ120PBTJ	REMQ96PBTJ REMQ120PBTJ REMQ120PBTJ
Power Supply			3 phase, 208/230V, 60Hz	3 phase, 208/230V, 60Hz
★1 Cooling Capacity	Nominal	Btu / h	312,000	336,000
	Rated		297,000	320,000
★2 Heating Capacity	Nominal	Btu / h	351,000	378,000
	Rated		334,000	360,000
Casing Color			Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)
Dimensions: (H×W×D)		in. (mm)	66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 (1680 × 930 × 765 + 1680 × 930 × 765) + 1680 × 930 × 765)	66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 + 66-1/8 × 36-5/8 × 30-1/8 (1680 × 930 × 765 + 1680 × 930 × 765) + 1680 × 930 × 765)
Heat Exchanger			Cross Fin Coil	Cross Fin Coil
Comp.	Type		Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type
	Displacement	m ³ /h	(10.53+13.34) × 3	(10.53+13.34) × 3
	Number of Revolutions	r/min	(2900, 6300) × 3	(2900, 6300) × 3
	Motor Output×Number of Units	kW	(2.2+4.5) × 2 + (3.5+4.5) × 1	(2.2+4.5) × 1 + (3.5+4.5) × 2
	Starting Method		Soft Start	Soft Start
Fan	Type		Propeller Fan	Propeller Fan
	Motor Output	kW	(0.75) × 1 + (0.75) × 1 + (0.75) × 1	(0.75) × 1 + (0.75) × 1 + (0.75) × 1
	Airflow Rate	cfm	6,530+6,530+7,060	6,530+7,060+7,060
	Drive		Direct Drive	Direct Drive
Connecting Pipes	Liquid Pipe	in. (mm)	φ3/4 (19.1) C1220T (Brazing Connection)	φ3/4 (19.1) C1220T (Brazing Connection)
	Suction Gas Pipe	in. (mm)	φ1-3/8 (35) C1220T (Brazing Connection)	φ1-3/8 (35) C1220T (Brazing Connection)
	High and Low Pressure Gas Pipe	in. (mm)	φ1-1/8 (28.6) C1220T (Brazing Connection)	φ1-1/8 (28.6) C1220T (Brazing Connection)
	Pressure Equalizer Tube	in. (mm)	φ3/4 C1220T (Brazing Connection)	φ3/4 (19.1) C1220T (Brazing Connection)
Mass		Lbs (kg)	560+560+560 (254+254+254)	560+560+560 (254+254+254)
Safety Devices			High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector
Defrost Method			Deicer	Deicer
Capacity Control		%	5~100	4~100
Refrigerant	Refrigerant Name		R-410A	R-410A
	Charge	Lbs (kg)	19.8 + 19.8 + 20.1 (9 + 9 + 9.1)	19.8 + 20.1 + 20.1 (9 + 9.1 + 9.1)
	Control		Electronic Expansion Valve	Electronic Expansion Valve
Standard Accessories			Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps
Drawing No.			C: 4D070900	C: 4D070901

Notes:


- ★1 Indoor temp. : 80°FDB(27°CDB), 67°FWB(19.4°CWB) / outdoor temp. : 95°FDB (35°CDB) / Equivalent piping length : 25ft (7.5 m), level difference : 0 ft.
★2 Indoor temp. : 70°FDB(21°CDB) / outdoor temp. : 47°FDB, 43°FWB (8.3°CDB, 6°CWB) / Equivalent piping length : 25ft (7.5 m), difference : 0 ft.

2. Dimensions

REYQ72PTJU / REYQ96PTJU / REYQ120PTJU / REYQ144PBTJ





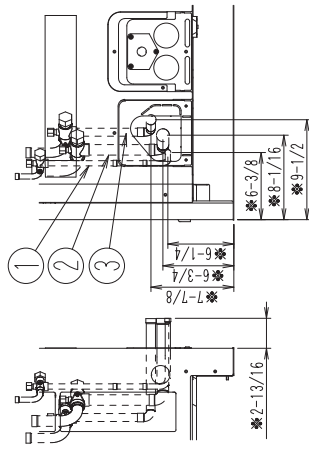


(DETAIL FOR FRONT SIDE)

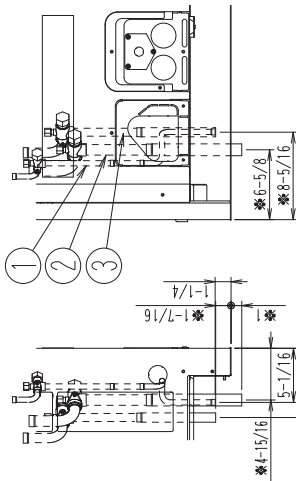

(DETAIL FOR BOTTOM SIDE)


- Notes)
1. For piping connection method (front and bottom sides), see the installation manual.
 2. High and low pressure gas pipe
 φ3/8 Brazing connection---REYQ72P
 φ3/4 Brazing connection---REYQ96, 120P
 φ7/8 Brazing connection---REYQ144P
 Suction gas pipe
 φ3/4 Brazing connection---REYQ72P
 φ7/8 Brazing connection---REYQ96P
 φ1-1/8 Brazing connection---REYQ120, 144P
 Liquid pipe
 φ3/8 Brazing connection---REYQ72, 96P
 φ1/2 Brazing connection---REYQ120, 144P
 3. * shows the dimensions after fixing the accessory pipes.

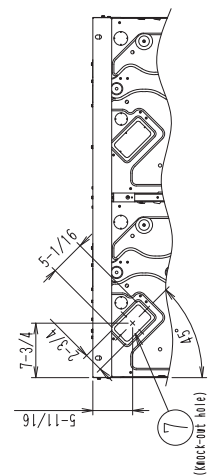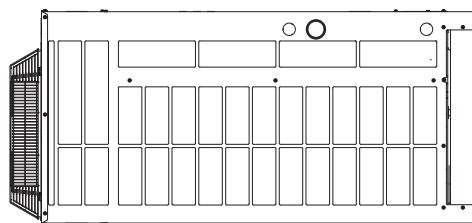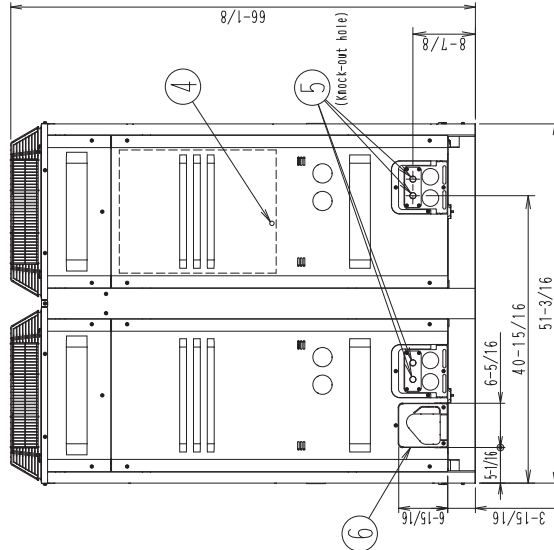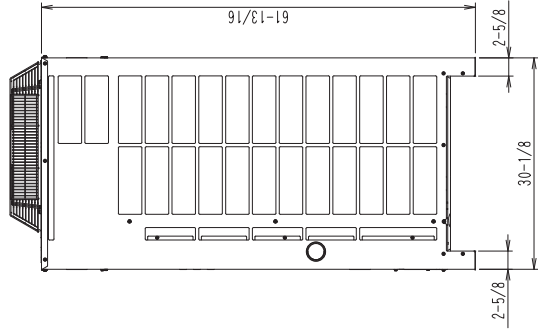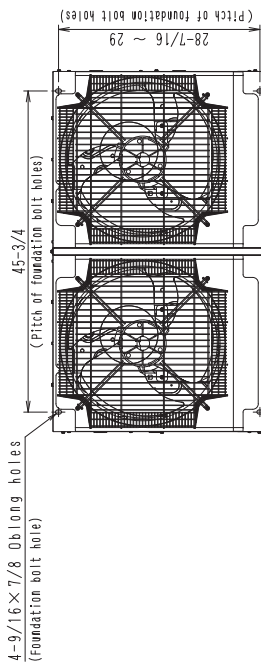

No.	Parts name	Remarks
7	Pipe routing hole(bottom)	See note 1.
6	Pipe routing hole(front)	See note 1.
5	Power cord routing hole(front)	See note 1.
4	Grounding terminal	φ 7/8 Inside of Electrical Components box (MS)
3	Gas pipe connection port (Only for REYQ144P)	See note 2.
2	High and low pressure gas pipe connection port	See note 2.
1	Suction gas pipe connection port	See note 2.
	Liquid pipe connection port	See note 2.

C: 3D058618D


REYQ168PBTJ / REYQ192PBTJ / REYQ216PBTJ / REYQ240PBTJ

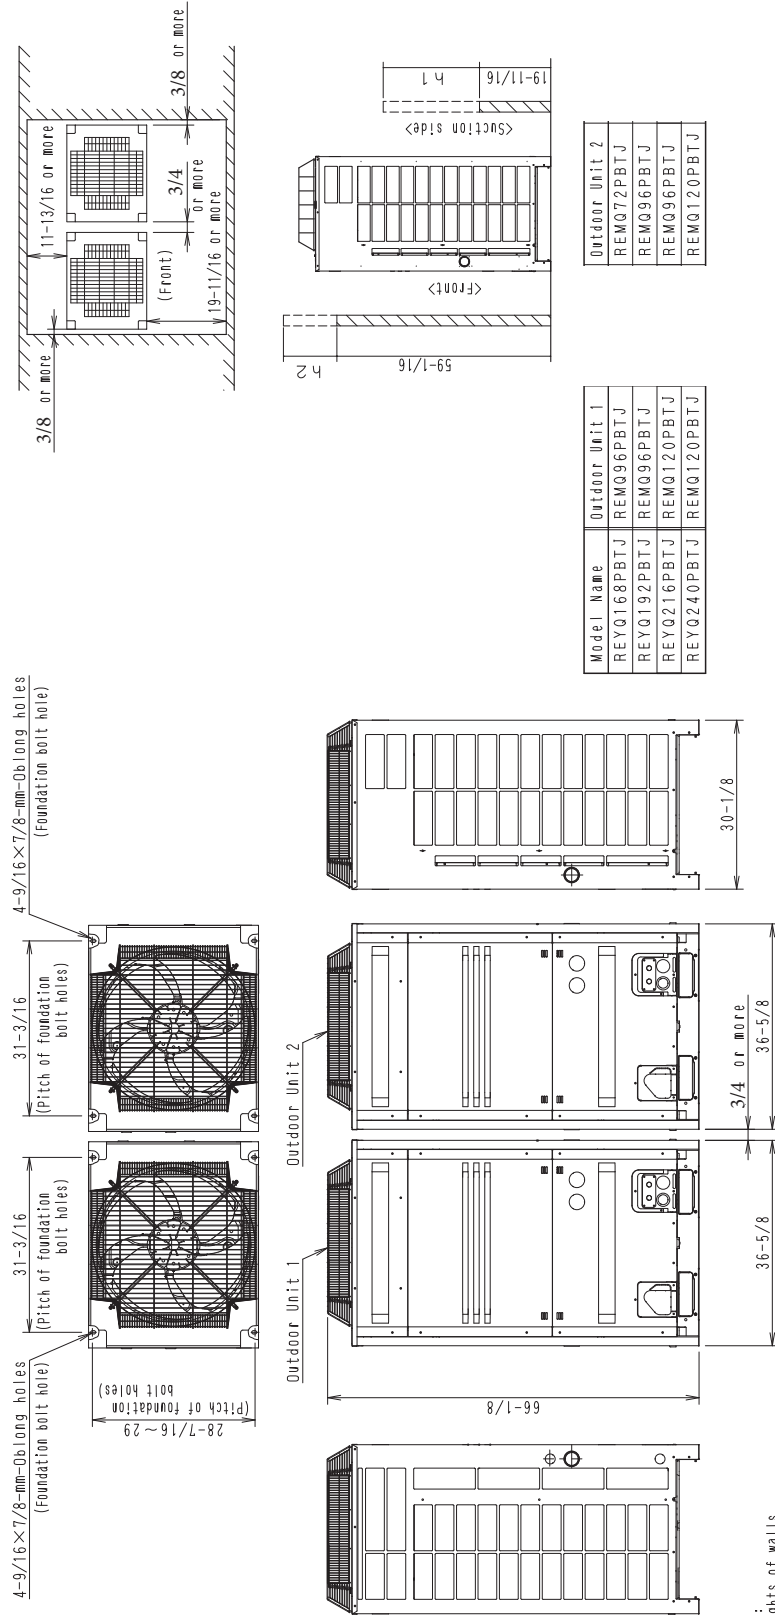

- Notes :
1. Heights of walls
 Front : 59-1/16in
 Suction side : 19-11/16in
 Side : Height unrestricted
 The installation space shown in this figure is based on the condition of cooling operation at the outdoor air temperature of 35°. The installation space of suction side shown above must be expanded in the following case.
 • Design outdoor temperature becomes over 35°F.
 • Operating over load, operating load (load factor) should be added to the design outdoor temperature.
 • Design suction side service space (height) should be added to the front and suction side service spaces respectively as shown in the figure.
 2. When installing the units, the most appropriate position should be selected from those in Section 3 to make it possible for a person to pass between units and the wall, and for the air to circulate freely.
 3. NOTE: If more units are to be installed than are shown in the above patterns, your layout should take into account the possibility of short circuiting.
 4. The units should be installed to leave sufficient space at the front for the on site refrigerant piping work to be carried out comfortably.

C: 3D070788

REYQ264PBTJ / REYQ288PBTJ / REYQ312PBTJ / REYQ336PBTJ

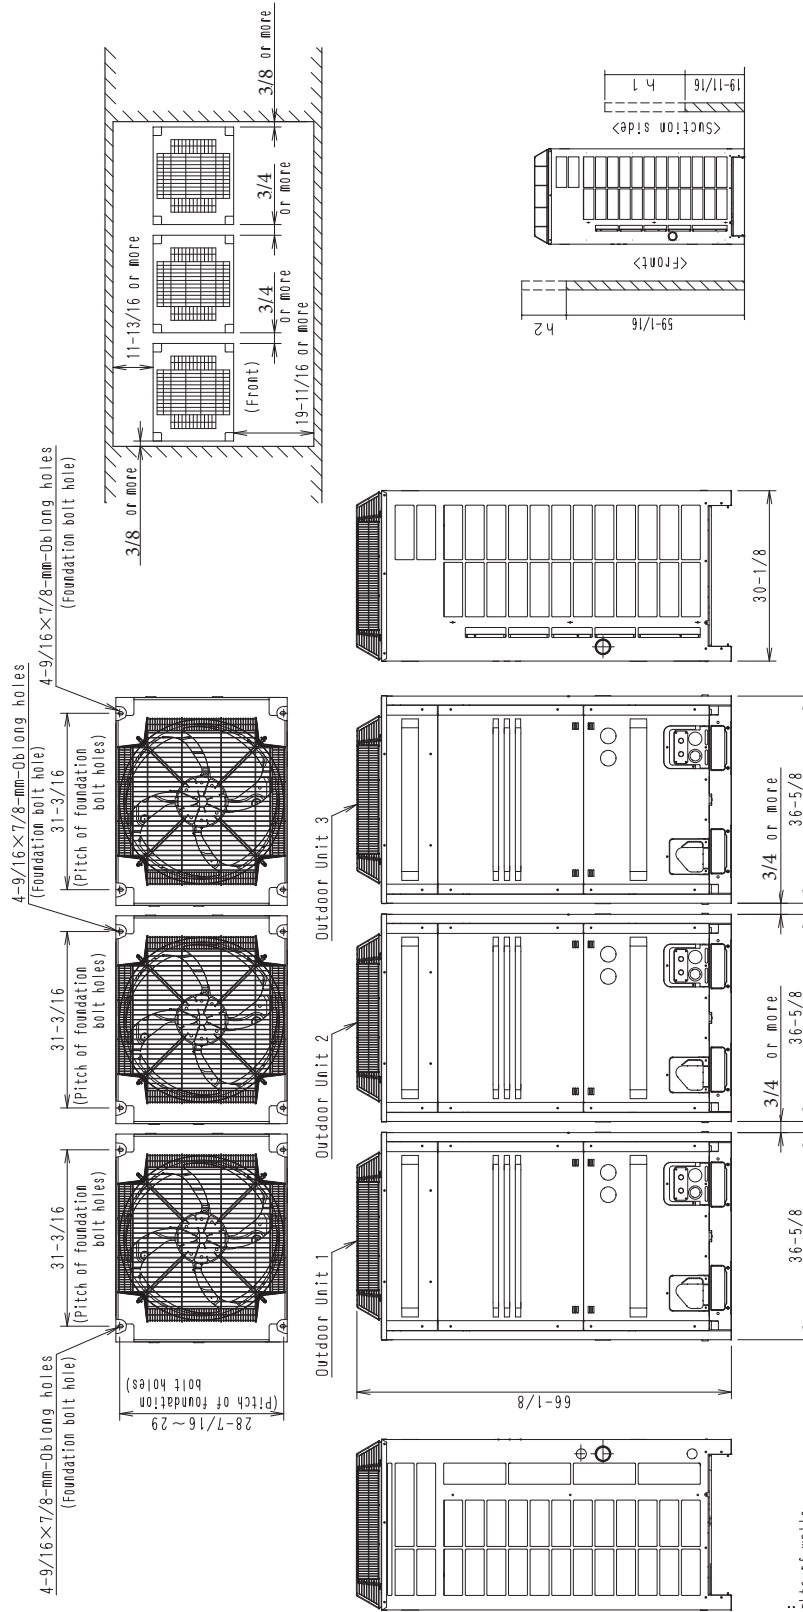

Outdoor Unit 3
REYQ264PBTJ
REYQ288PBTJ
REYQ312PBTJ
REYQ336PBTJ


Outdoor Unit 2
REYQ264PBTJ
REYQ288PBTJ
REYQ312PBTJ
REYQ336PBTJ

Outdoor Unit 1
REYQ264PBTJ
REYQ288PBTJ
REYQ312PBTJ
REYQ336PBTJ

- Notes:
1. Heights of walls:
 Front: 59-1/16in
 Suction side: 19-11/16in
 Suction side: unrestricted
 Site height: unrestricted
 The installation space shown in this figure is based on the condition of cooling operation at the outdoor unit temperature of 95°F.
 The installation space of suction side shown above must be expanded in the following case.
 • Operating over Max. operating load (in case of causing a heavy heating load at indoor unit side)
 • Design outdoor temperature becomes over 95°F.
 2. If the above wall heights are exceeded then h2/2 and h1/2 should be added to the front and suction side service spaces, respectively as shown in the following figure.
 3. When installing the units, the most appropriate pattern should be selected from those in Section 3 in order to obtain the best fit in the space available, bearing in mind the need to leave enough space for a person to pass between units and the wall, and for the air to circulate freely.
 NOTE: If more units are to be installed than are shown in the above patterns, your layout should take into account the possibility of short circuiting.
 4. The units should be installed to leave sufficient space at the front for the on site refrigerant piping work to be carried out comfortably.

C:3D070858


REM72PBTJ / REM96PBTJ / REM120PBTJ

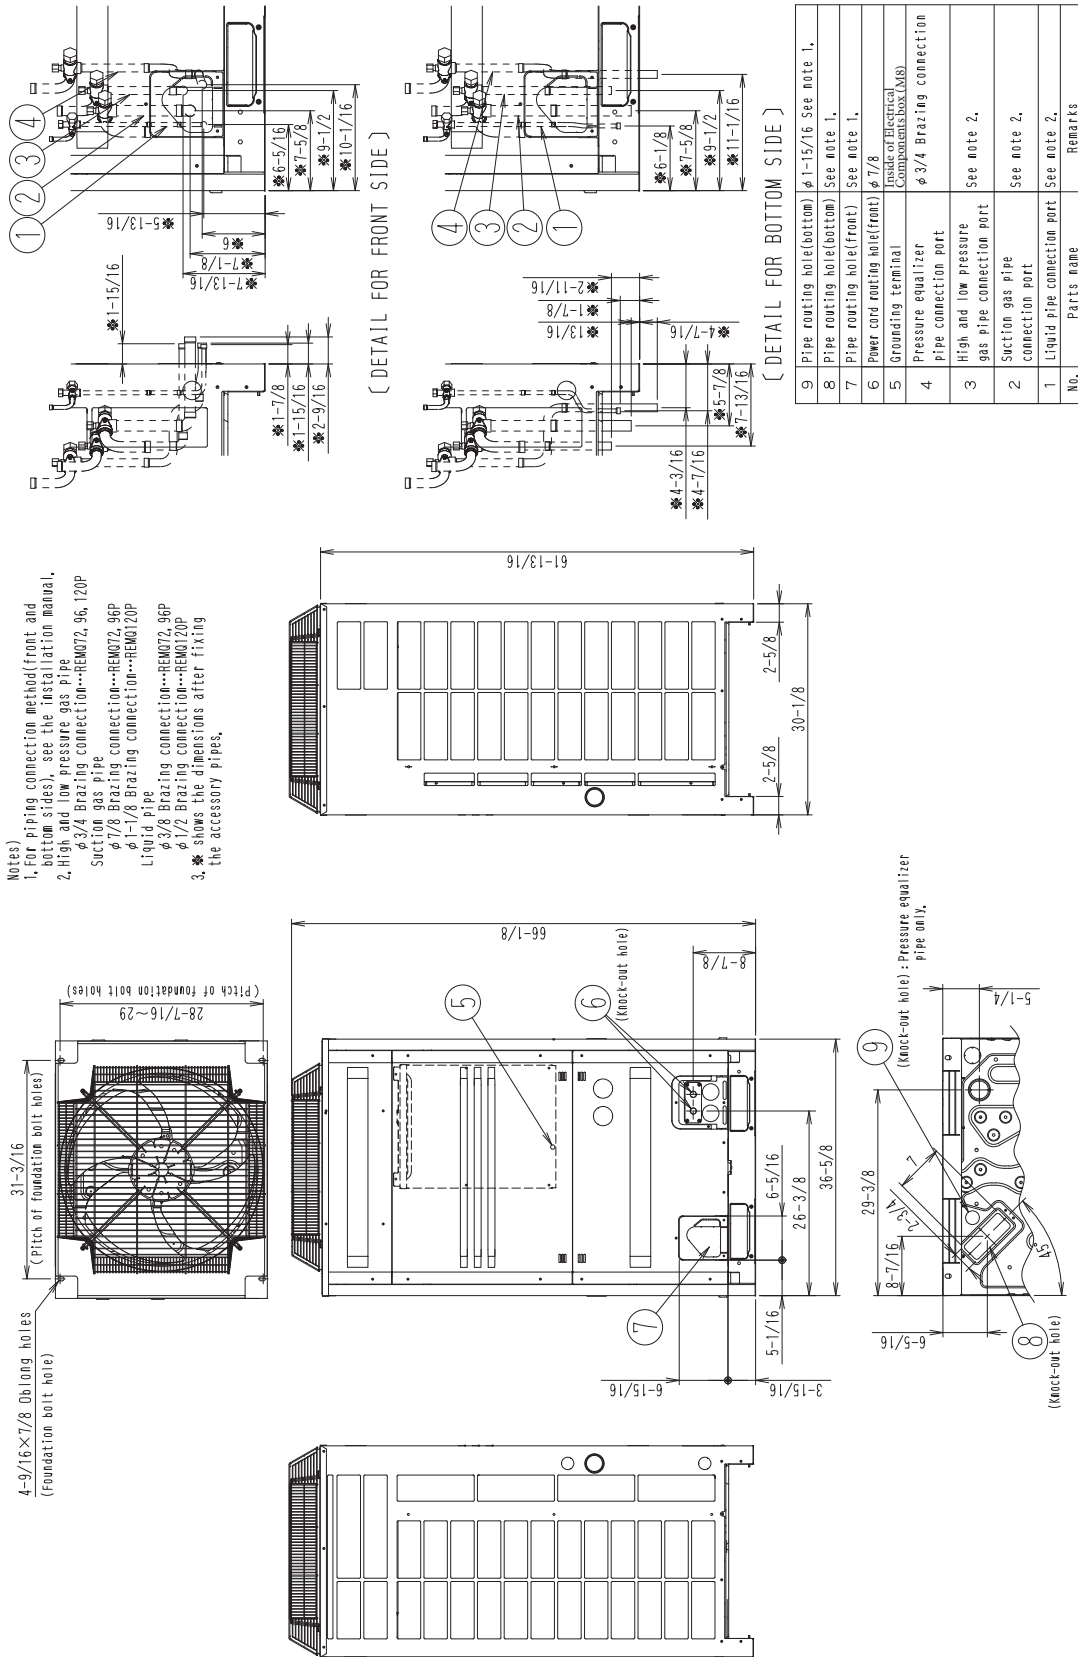

3D058617C

3. Service Space


REYQ72PTJU / REYQ96PTJU / REYQ120PTJU / REYQ144PBTJ / REYQ168PBTJ / REYQ192PBTJ / REYQ216PBTJ / REYQ240PBTJ / REYQ264PBTJ / REYQ288PBTJ / REYQ312PBTJ / REYQ336PBTJ

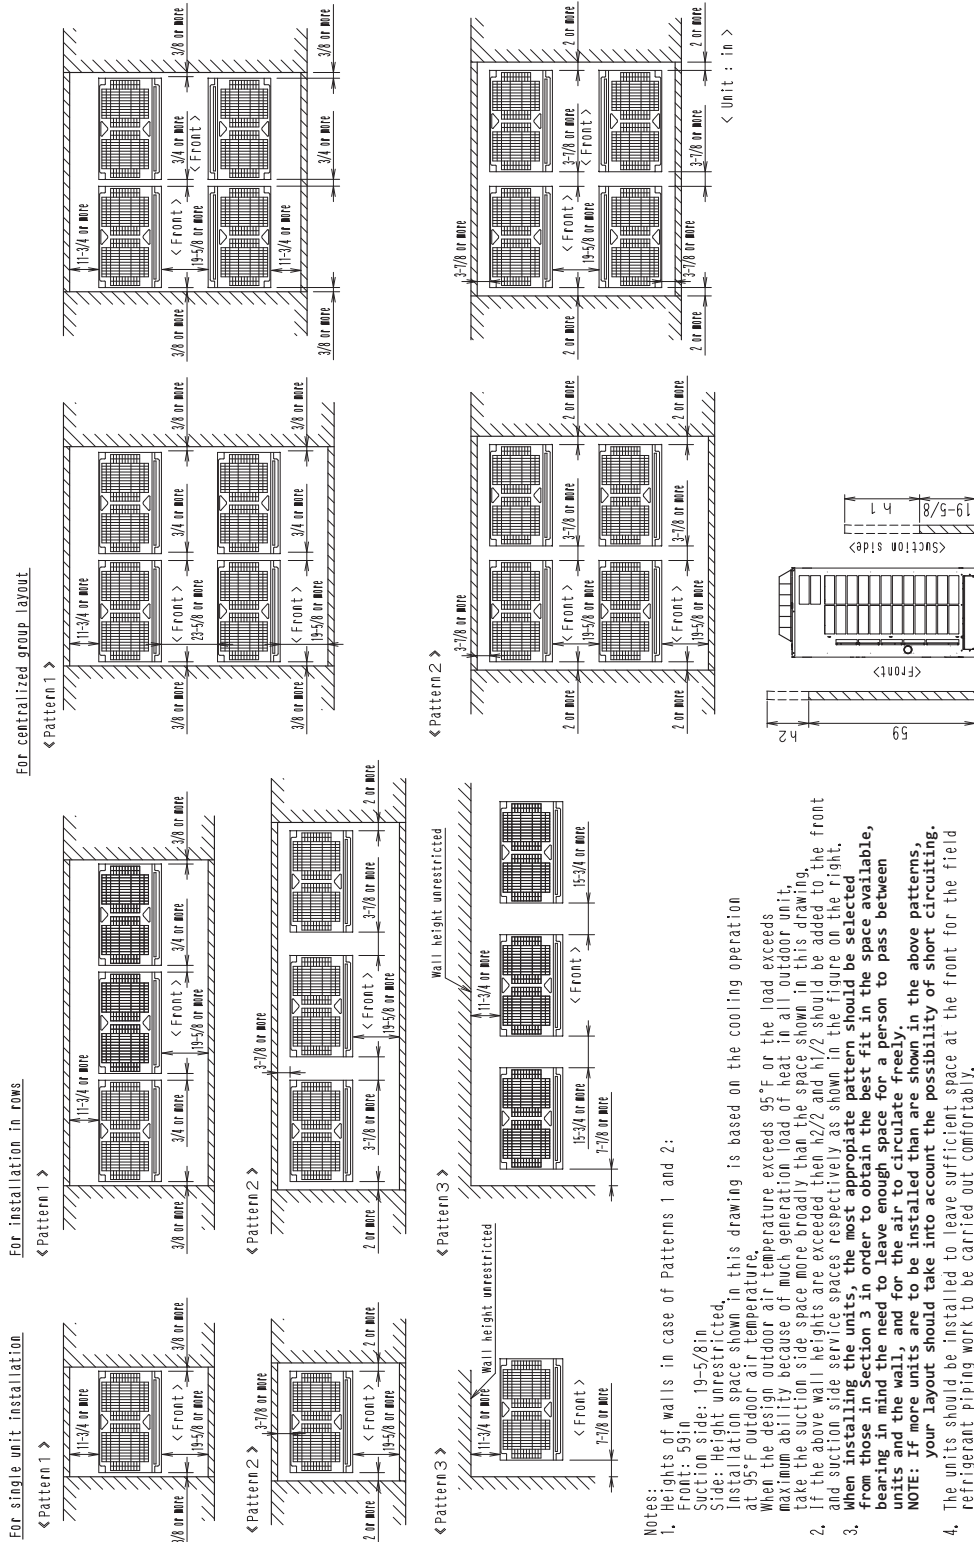

©2014 Daikin Industries, Ltd.


4. Piping Diagrams

REYQ72PTJU / REYQ96PTJU / REYQ120PTJU

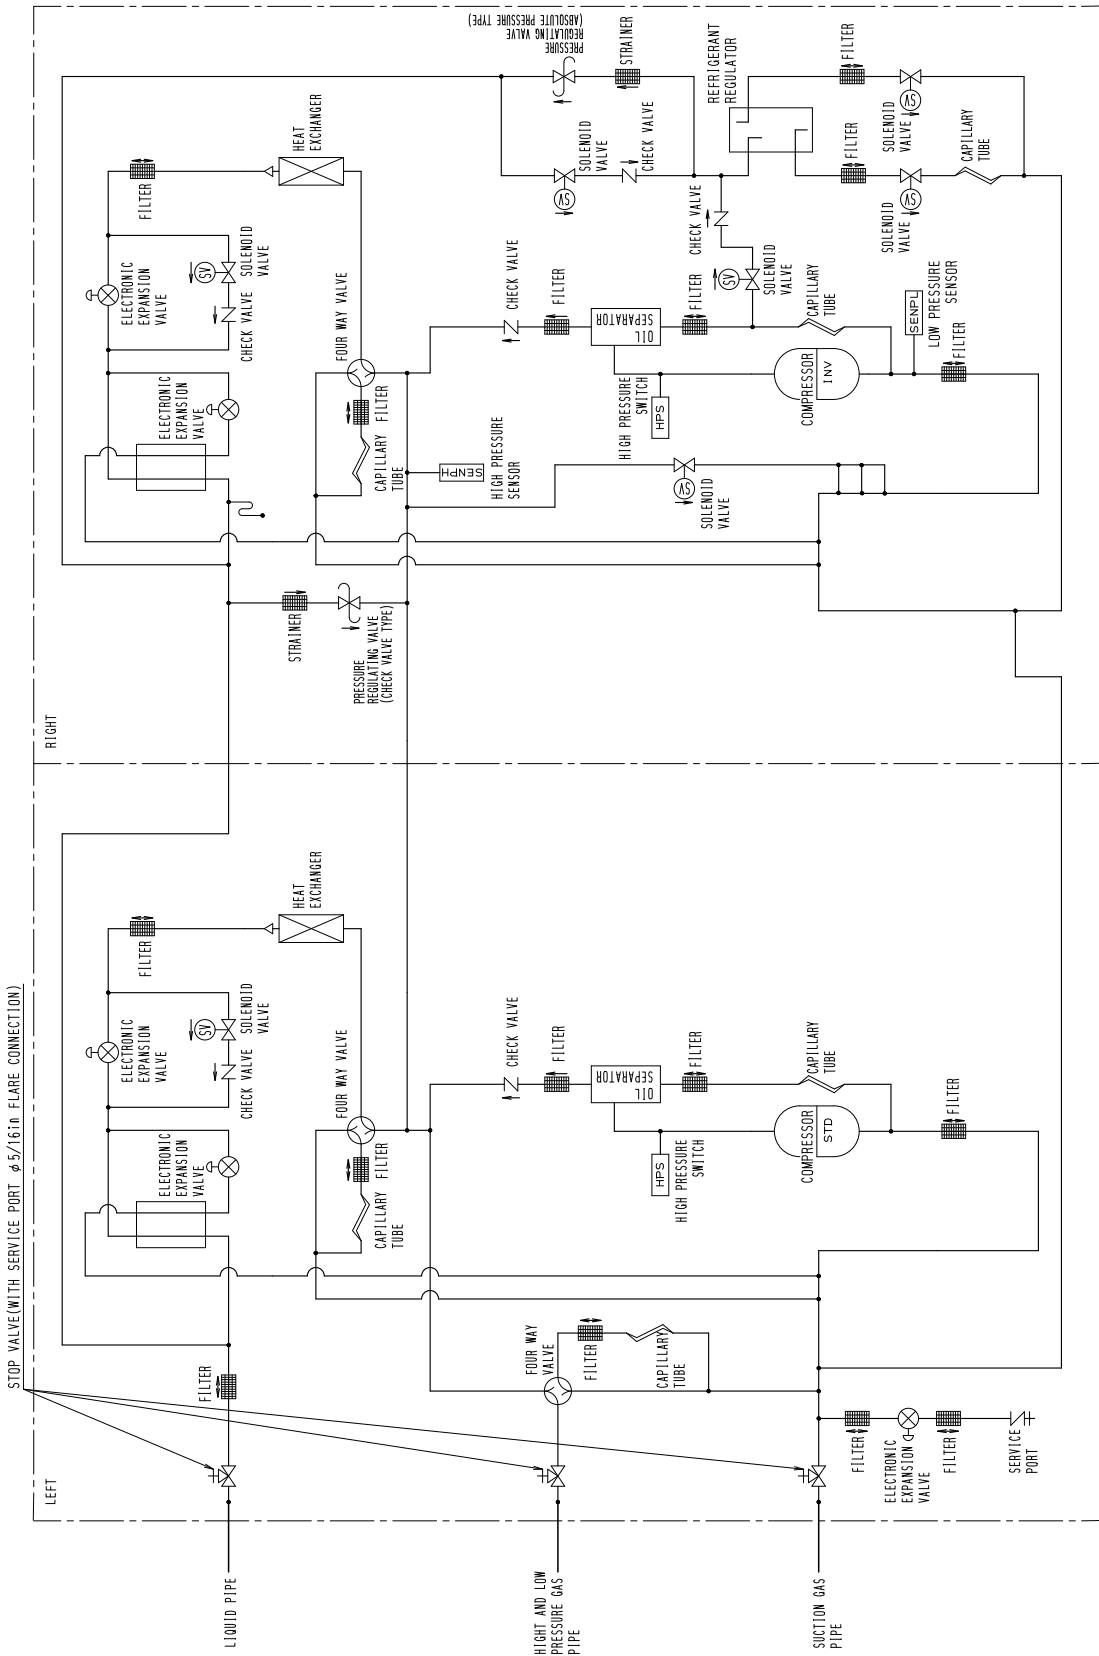


3D058639C

REYQ144PBTJ

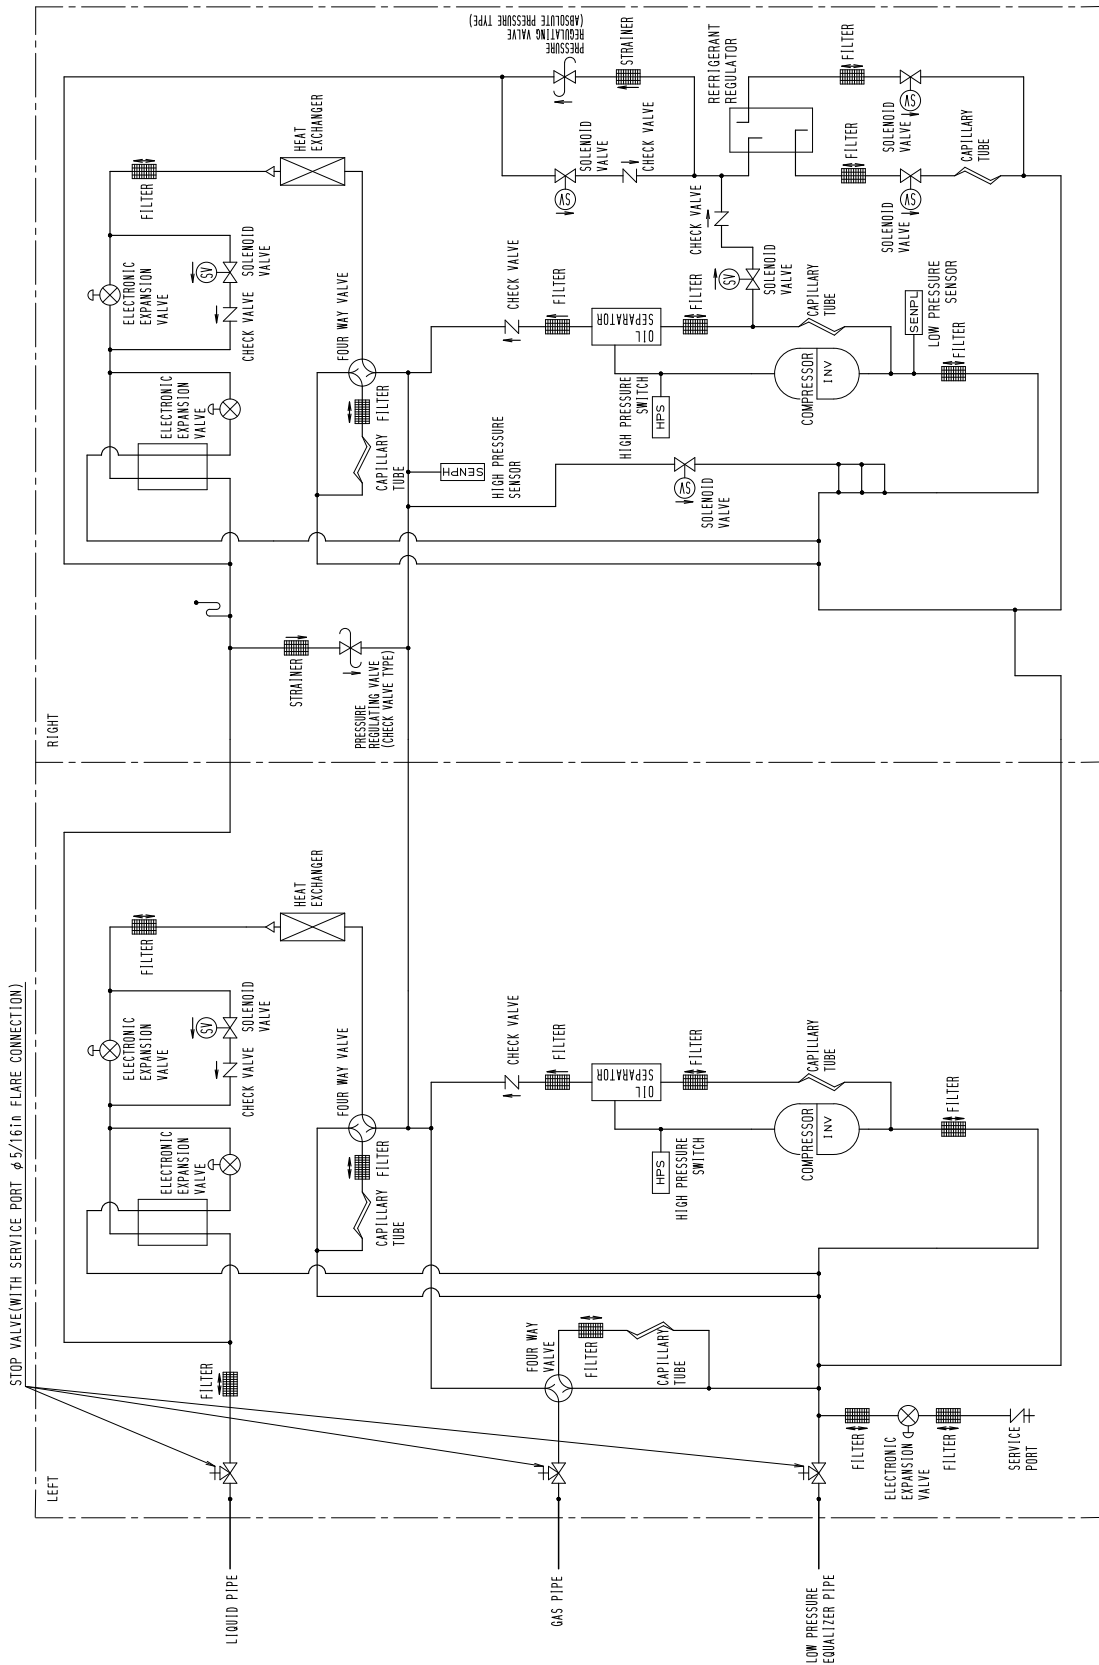


3D058640A

REM72PBTJ

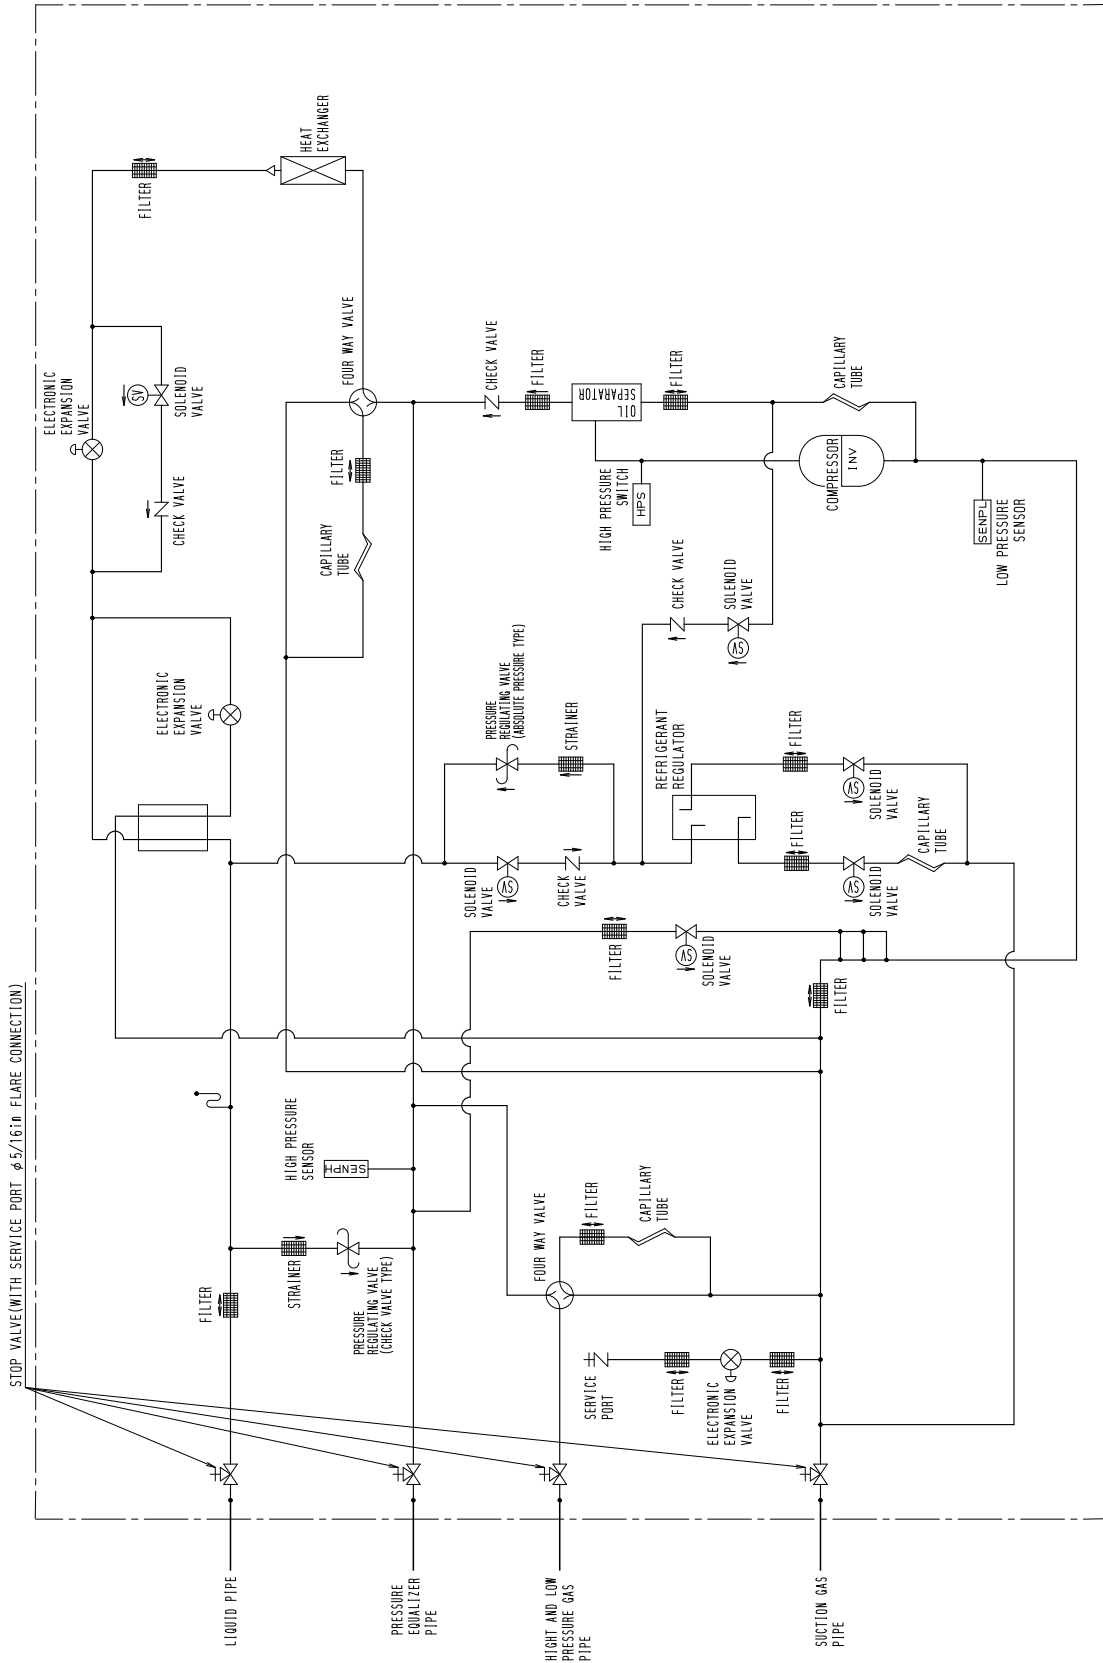


3D058637C

REMQ96PBTJ / REMQ120PBTJ

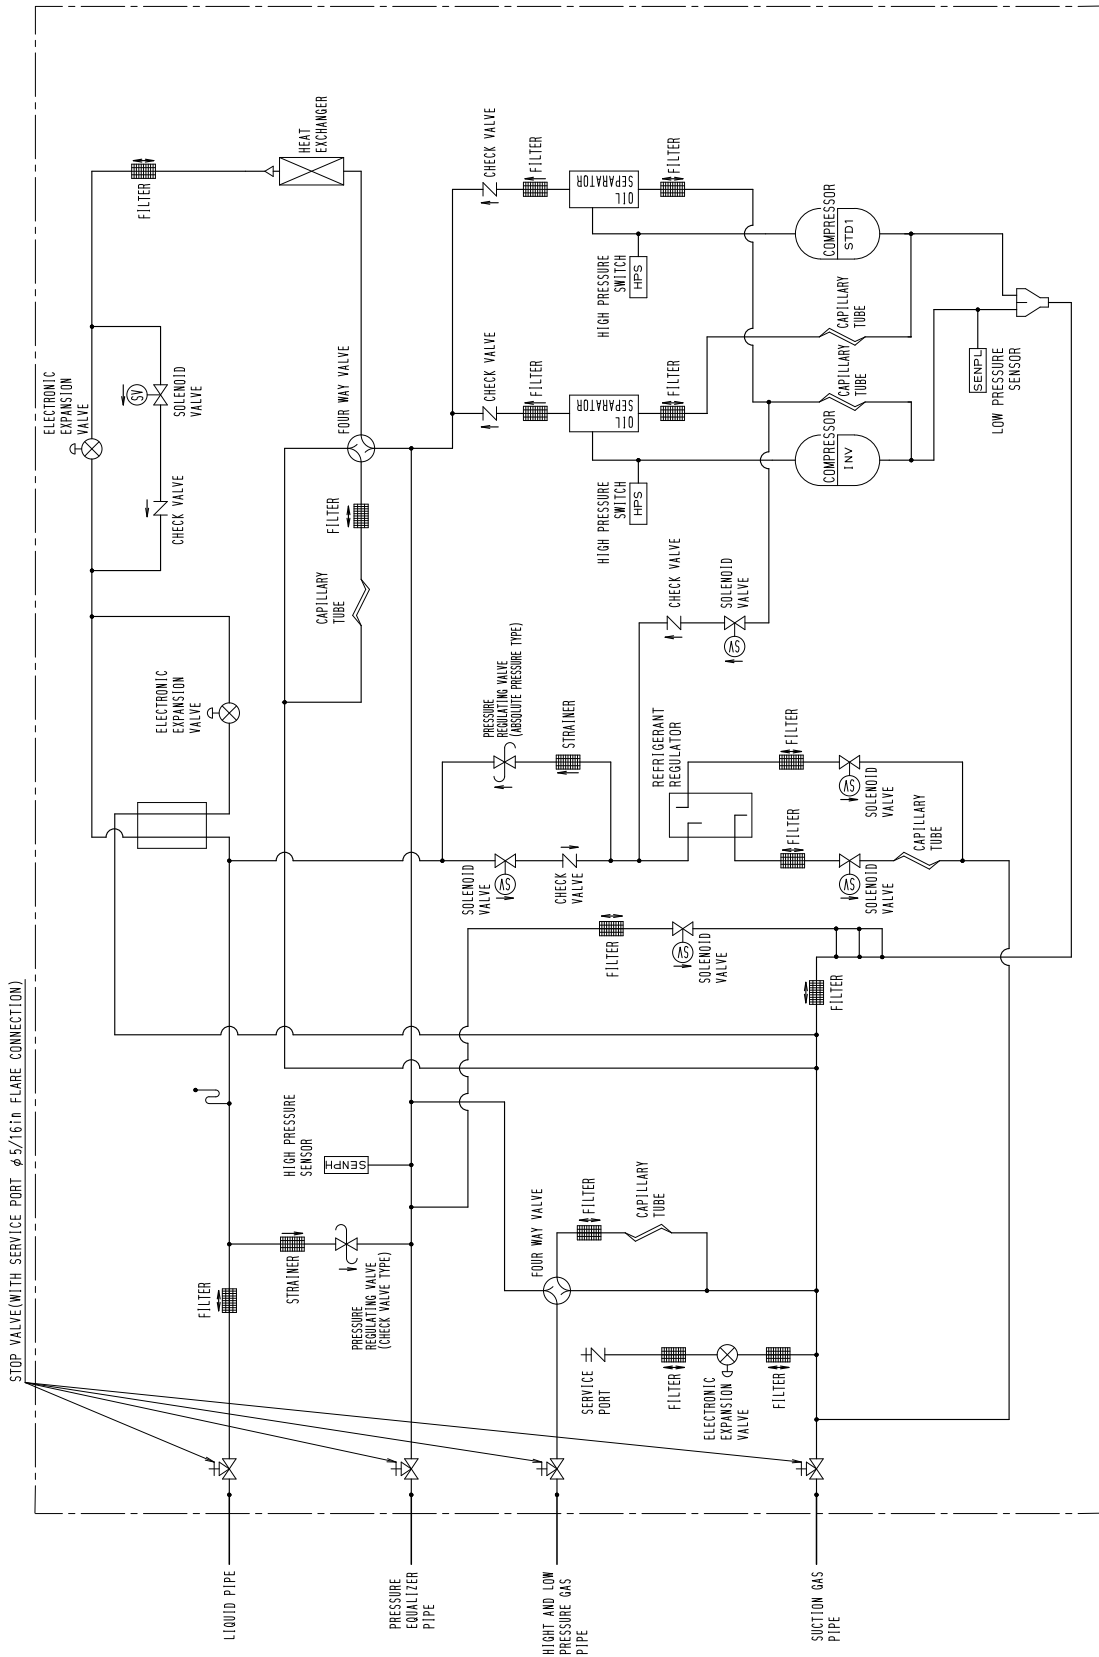

3D058638C

REYQ144PBTJ

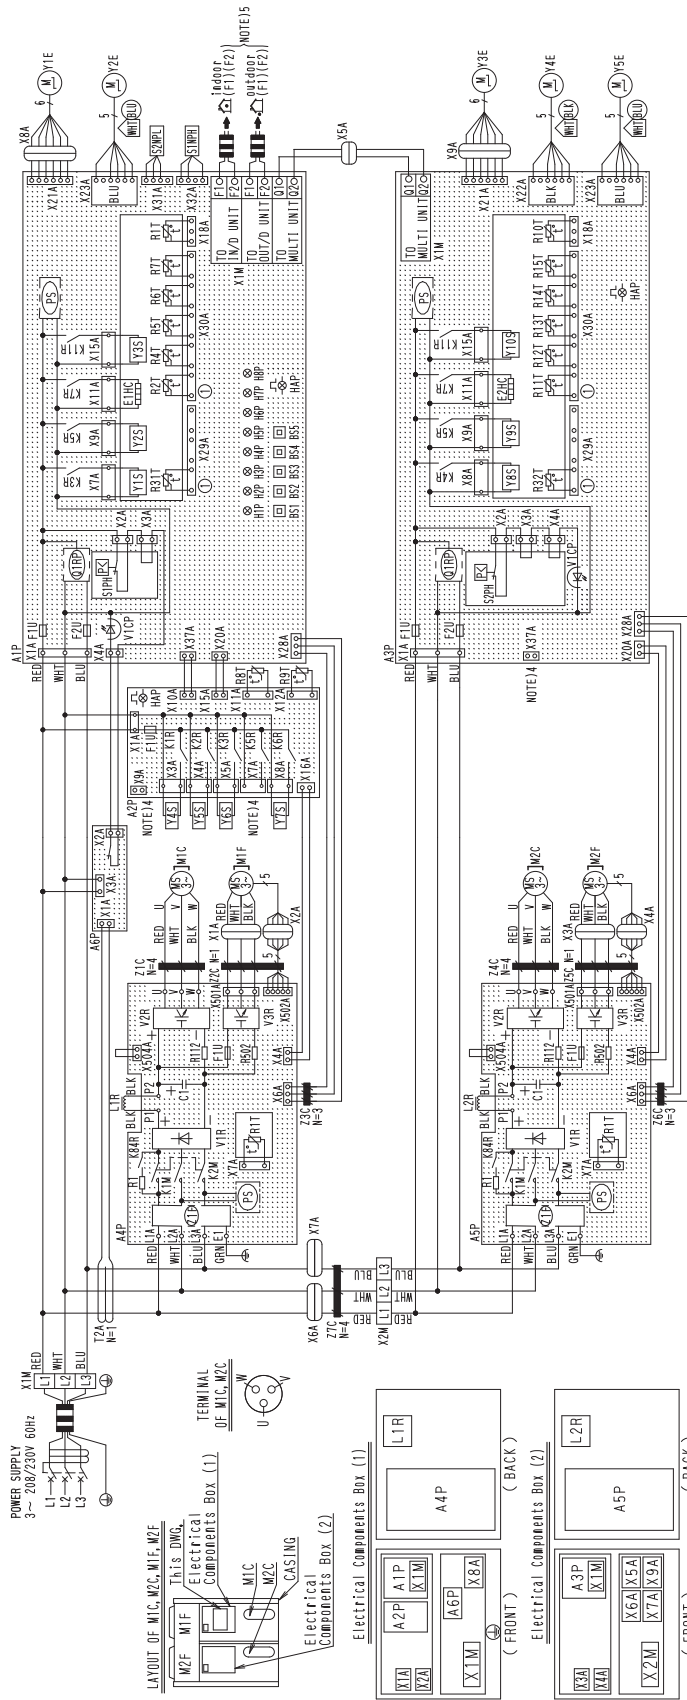


NOTES

- THIS WIRING DIAGRAM IS APPLIED ONLY TO THE OUTDOOR UNIT.
- FIELD WIRING
- TERMINAL STRIP
- WHEN USING THE OPTIONAL ADAPTOR, REFER TO THE INSTALLATION MANUAL OF THE OPTIONAL ADAPTOR FOR INDOOR-OUTDOOR TRANSMISSION
- FOR CONNECTION WIRING TO INDOOR-OUTDOOR TRANSMISSION E1* F2, OUTDOOR-MULTI TRANSMISSION 01* 02, REFER TO THE INSTALLATION MANUAL
- HOW TO USE RST~5, REFER TO "SERVICE PRECAUTION"
- WHEN OPERATING, DON'T SHORTCIRCUIT THE PROTECTION DEVICES (S1, 2PH),
- SYMBOLS INDICATE COLORS OF EACH PARTS AS SHOWN BELOW,
- IS CONNECTOR COLOR FOR PRINTED CIRCUIT BOARD,
- IS IDENTIFICATION COLOR FOR COMPONENT LEAD WIRE,
- COLORS BLACK:BLACK RED:RED BLU:BLUE WHI:WHITE GRN:GREEN,

ATP	PRINTED CIRCUIT BOARD (MAIN)	Z2R	MAGNETIC RELAY (YS1/ASP)	R1	RESISTOR (CURRENT SENSOR) (AP/ASP)	R15T	TEMPERATURE SENSOR (HEAT EXC. LIQUID 2) (ASP)	Y25	SOLENOID VALVE (4 WAY VALVE HEAT EXC. 1)
A2P	PRINTED CIRCUIT BOARD (SUB 1)	C5R	MAGNETIC RELAY (YS1/ASP)	R12	RESISTOR (AP/ASP)	S2NH	PRESSURE SENSOR (LOW) (AP)	Y35	SOLENOID VALVE (WHI)
ASP	PRINTED CIRCUIT BOARD (SUB 2)	C6R	MAGNETIC RELAY (YS1/ASP)	R11	TEMPERATURE SENSOR (AIR) (AP)	S2PL	PRESSURE SENSOR (LOW) (AP)	Y45	SOLENOID VALVE (HOT GAS)
AP, ASP	PRINTED CIRCUIT BOARD (WHI)	L4R	MAGNETIC RELAY (YS1/ASP)	R21	TEMPERATURE SENSOR (LIQUID 1) (AP)	S2PH	PRESSURE SENSOR (HIGH) (AP/ASP)	Y55	SOLENOID VALVE (HOT GAS)
BST~5	PUSH BUTTON SWITCH (MODE SET, RETURN, TEST, RESET)	K5R	MAGNETIC RELAY (FOR OPTION) (ASP)	R22	TEMPERATURE SENSOR (HEAT EXC. GAS 1) (AP)	V2A	CURRENT SENSOR (AP)	Y65	SOLENOID VALVE (WHI)
CT	CAPACITOR (AP/ASP)	K6R	MAGNETIC RELAY (YS1/ASP)	R23	TEMPERATURE SENSOR (HEAT EXC. GAS 2) (AP)	V2P	SAFETY DEVICES (WHI) (AP/ASP)	Y75	SOLENOID VALVE (WHI)
ETHC, EZHC	CRANKCASE HEATER (AP/ASP)	K7R	MAGNETIC RELAY (YS1/ASP)	R24	TEMPERATURE SENSOR (SUB COOL. HEAT EXC. GAS 1)	V2R, V3R	POWER MODULE (AP/ASP)	Y85	SOLENOID VALVE (4 WAY VALVE-PIPE)
FIU, F2U	FUSE (1.3A, 5A, 250V) (AP/ASP)	K8R	MAGNETIC RELAY (YS1/ASP)	R25	TEMPERATURE SENSOR (SUB COOL. HEAT EXC. GAS 2)	X1A~X8A	CONNECTOR	Y95	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
FIU	FUSE (1.6A, 0.6A/0.4V) (AP/ASP)	K9R	MAGNETIC RELAY (YS1/ASP)	R26	TEMPERATURE SENSOR (COOL. HEAT EXC. LIQUID 1) (AP)	X1M	TERMINAL STRIP (POWER SUPPLY)	Y105	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
FIU	FUSE (1.6A, 0.6A/0.4V) (AP/ASP)	K10R	MAGNETIC RELAY (YS1/ASP)	R27	TEMPERATURE SENSOR (COOL. HEAT EXC. LIQUID 2) (AP)	X2M	TERMINAL STRIP (CONTROL) (AP/ASP)	Y155	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
HIP~8P	PILOT AMP (SERVICE MONITOR - DRUMS)	K11R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R28	TEMPERATURE SENSOR (SECTION 1) (AP)	X2M	TERMINAL STRIP (RELAY)	Y165	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
LIR	RELAY (FOR SERVICE MONITOR - DRUMS)	K12R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R29	TEMPERATURE SENSOR (SECTION 2) (AP)	X2M	TERMINAL STRIP (RELAY)	Y175	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
LIR-L2R	RELAY (FOR SERVICE MONITOR - DRUMS)	K13R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R30	TEMPERATURE SENSOR (SECTION 3) (AP)	X2M	TERMINAL STRIP (RELAY)	Y185	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
M1C, M2C	MOTOR (FOR SERVICE MONITOR - DRUMS)	K14R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R31	TEMPERATURE SENSOR (SECTION 4) (AP)	X2M	TERMINAL STRIP (RELAY)	Y195	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
M1F, M2F	MOTOR (FOR SERVICE MONITOR - DRUMS)	K15R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R32	TEMPERATURE SENSOR (SECTION 5) (AP)	X2M	TERMINAL STRIP (RELAY)	Y205	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
M1C, M2C	MOTOR (FOR SERVICE MONITOR - DRUMS)	K16R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R33	TEMPERATURE SENSOR (SECTION 6) (AP)	X2M	TERMINAL STRIP (RELAY)	Y215	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
P5	STARTING POWER SUPPLY (AP, AP/ASP)	K17R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R34	TEMPERATURE SENSOR (SECTION 7) (AP)	X2M	TERMINAL STRIP (RELAY)	Y225	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1M, X2M	MAGNETIC RELAY (M1C, M2C) (AP/ASP)	K18R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R35	TEMPERATURE SENSOR (SECTION 8) (AP)	X2M	TERMINAL STRIP (RELAY)	Y235	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K19R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R36	TEMPERATURE SENSOR (SECTION 9) (AP)	X2M	TERMINAL STRIP (RELAY)	Y245	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K20R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R37	TEMPERATURE SENSOR (SECTION 10) (AP)	X2M	TERMINAL STRIP (RELAY)	Y255	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K21R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R38	TEMPERATURE SENSOR (SECTION 11) (AP)	X2M	TERMINAL STRIP (RELAY)	Y265	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K22R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R39	TEMPERATURE SENSOR (SECTION 12) (AP)	X2M	TERMINAL STRIP (RELAY)	Y275	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K23R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R40	TEMPERATURE SENSOR (SECTION 13) (AP)	X2M	TERMINAL STRIP (RELAY)	Y285	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K24R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R41	TEMPERATURE SENSOR (SECTION 14) (AP)	X2M	TERMINAL STRIP (RELAY)	Y295	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K25R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R42	TEMPERATURE SENSOR (SECTION 15) (AP)	X2M	TERMINAL STRIP (RELAY)	Y305	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K26R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R43	TEMPERATURE SENSOR (SECTION 16) (AP)	X2M	TERMINAL STRIP (RELAY)	Y315	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K27R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R44	TEMPERATURE SENSOR (SECTION 17) (AP)	X2M	TERMINAL STRIP (RELAY)	Y325	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K28R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R45	TEMPERATURE SENSOR (SECTION 18) (AP)	X2M	TERMINAL STRIP (RELAY)	Y335	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K29R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R46	TEMPERATURE SENSOR (SECTION 19) (AP)	X2M	TERMINAL STRIP (RELAY)	Y345	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K30R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R47	TEMPERATURE SENSOR (SECTION 20) (AP)	X2M	TERMINAL STRIP (RELAY)	Y355	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K31R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R48	TEMPERATURE SENSOR (SECTION 21) (AP)	X2M	TERMINAL STRIP (RELAY)	Y365	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K32R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R49	TEMPERATURE SENSOR (SECTION 22) (AP)	X2M	TERMINAL STRIP (RELAY)	Y375	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K33R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R50	TEMPERATURE SENSOR (SECTION 23) (AP)	X2M	TERMINAL STRIP (RELAY)	Y385	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K34R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R51	TEMPERATURE SENSOR (SECTION 24) (AP)	X2M	TERMINAL STRIP (RELAY)	Y395	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K35R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R52	TEMPERATURE SENSOR (SECTION 25) (AP)	X2M	TERMINAL STRIP (RELAY)	Y405	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K36R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R53	TEMPERATURE SENSOR (SECTION 26) (AP)	X2M	TERMINAL STRIP (RELAY)	Y415	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K37R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R54	TEMPERATURE SENSOR (SECTION 27) (AP)	X2M	TERMINAL STRIP (RELAY)	Y425	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K38R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R55	TEMPERATURE SENSOR (SECTION 28) (AP)	X2M	TERMINAL STRIP (RELAY)	Y435	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K39R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R56	TEMPERATURE SENSOR (SECTION 29) (AP)	X2M	TERMINAL STRIP (RELAY)	Y445	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K40R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R57	TEMPERATURE SENSOR (SECTION 30) (AP)	X2M	TERMINAL STRIP (RELAY)	Y455	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K41R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R58	TEMPERATURE SENSOR (SECTION 31) (AP)	X2M	TERMINAL STRIP (RELAY)	Y465	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K42R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R59	TEMPERATURE SENSOR (SECTION 32) (AP)	X2M	TERMINAL STRIP (RELAY)	Y475	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K43R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R60	TEMPERATURE SENSOR (SECTION 33) (AP)	X2M	TERMINAL STRIP (RELAY)	Y485	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K44R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R61	TEMPERATURE SENSOR (SECTION 34) (AP)	X2M	TERMINAL STRIP (RELAY)	Y495	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K45R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R62	TEMPERATURE SENSOR (SECTION 35) (AP)	X2M	TERMINAL STRIP (RELAY)	Y505	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K46R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R63	TEMPERATURE SENSOR (SECTION 36) (AP)	X2M	TERMINAL STRIP (RELAY)	Y515	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K47R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R64	TEMPERATURE SENSOR (SECTION 37) (AP)	X2M	TERMINAL STRIP (RELAY)	Y525	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K48R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R65	TEMPERATURE SENSOR (SECTION 38) (AP)	X2M	TERMINAL STRIP (RELAY)	Y535	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K49R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R66	TEMPERATURE SENSOR (SECTION 39) (AP)	X2M	TERMINAL STRIP (RELAY)	Y545	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K50R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R67	TEMPERATURE SENSOR (SECTION 40) (AP)	X2M	TERMINAL STRIP (RELAY)	Y555	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K51R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R68	TEMPERATURE SENSOR (SECTION 41) (AP)	X2M	TERMINAL STRIP (RELAY)	Y565	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K52R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R69	TEMPERATURE SENSOR (SECTION 42) (AP)	X2M	TERMINAL STRIP (RELAY)	Y575	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K53R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R70	TEMPERATURE SENSOR (SECTION 43) (AP)	X2M	TERMINAL STRIP (RELAY)	Y585	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K54R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R71	TEMPERATURE SENSOR (SECTION 44) (AP)	X2M	TERMINAL STRIP (RELAY)	Y595	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K55R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R72	TEMPERATURE SENSOR (SECTION 45) (AP)	X2M	TERMINAL STRIP (RELAY)	Y605	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K56R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R73	TEMPERATURE SENSOR (SECTION 46) (AP)	X2M	TERMINAL STRIP (RELAY)	Y615	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K57R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R74	TEMPERATURE SENSOR (SECTION 47) (AP)	X2M	TERMINAL STRIP (RELAY)	Y625	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K58R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R75	TEMPERATURE SENSOR (SECTION 48) (AP)	X2M	TERMINAL STRIP (RELAY)	Y635	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K59R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R76	TEMPERATURE SENSOR (SECTION 49) (AP)	X2M	TERMINAL STRIP (RELAY)	Y645	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K60R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R77	TEMPERATURE SENSOR (SECTION 50) (AP)	X2M	TERMINAL STRIP (RELAY)	Y655	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K61R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R78	TEMPERATURE SENSOR (SECTION 51) (AP)	X2M	TERMINAL STRIP (RELAY)	Y665	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K62R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R79	TEMPERATURE SENSOR (SECTION 52) (AP)	X2M	TERMINAL STRIP (RELAY)	Y675	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K63R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R80	TEMPERATURE SENSOR (SECTION 53) (AP)	X2M	TERMINAL STRIP (RELAY)	Y685	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K64R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R81	TEMPERATURE SENSOR (SECTION 54) (AP)	X2M	TERMINAL STRIP (RELAY)	Y695	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K65R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R82	TEMPERATURE SENSOR (SECTION 55) (AP)	X2M	TERMINAL STRIP (RELAY)	Y705	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K66R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R83	TEMPERATURE SENSOR (SECTION 56) (AP)	X2M	TERMINAL STRIP (RELAY)	Y715	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K67R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R84	TEMPERATURE SENSOR (SECTION 57) (AP)	X2M	TERMINAL STRIP (RELAY)	Y725	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K68R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R85	TEMPERATURE SENSOR (SECTION 58) (AP)	X2M	TERMINAL STRIP (RELAY)	Y735	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K69R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R86	TEMPERATURE SENSOR (SECTION 59) (AP)	X2M	TERMINAL STRIP (RELAY)	Y745	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K70R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R87	TEMPERATURE SENSOR (SECTION 60) (AP)	X2M	TERMINAL STRIP (RELAY)	Y755	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K71R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R88	TEMPERATURE SENSOR (SECTION 61) (AP)	X2M	TERMINAL STRIP (RELAY)	Y765	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K72R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R89	TEMPERATURE SENSOR (SECTION 62) (AP)	X2M	TERMINAL STRIP (RELAY)	Y775	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K73R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R90	TEMPERATURE SENSOR (SECTION 63) (AP)	X2M	TERMINAL STRIP (RELAY)	Y785	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K74R	MAGNETIC RELAY (CURRENT LIMITING) (AP/ASP)	R91	TEMPERATURE SENSOR (SECTION 64) (AP)	X2M	TERMINAL STRIP (RELAY)	Y795	SOLENOID VALVE (4 WAY VALVE-HEAT EXC. 2)
X1R	MAGNETIC RELAY (YS1/ASP)	K75R	M						

REM72PBTJ

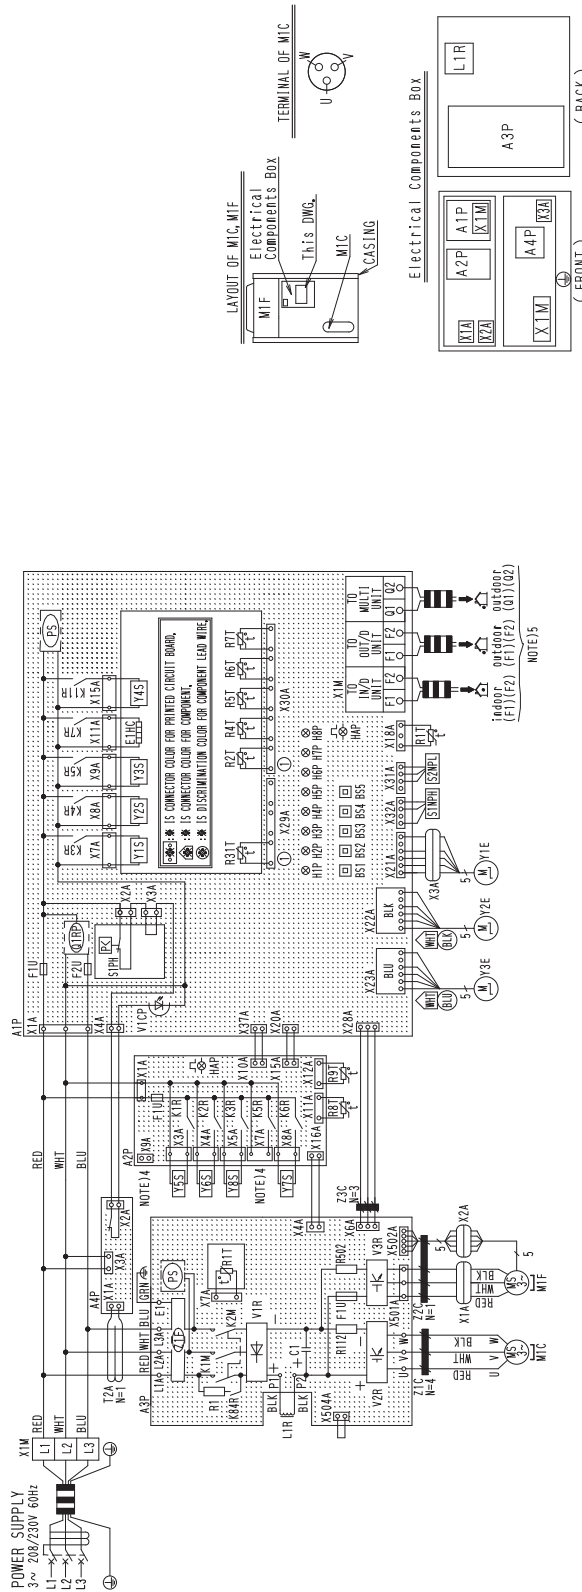


A1P	PRINTED CIRCUIT BOARD (MAIN)	K3R	MAGNETIC RELAY (YTS) (APP)	R2T	THERMISTOR (HEAT ETC. GAS) (APP)	X1M	TERMINAL STRIP (CONTROL) (APP)
A2P	PRINTED CIRCUIT BOARD (SUB)	K3R	MAGNETIC RELAY (YBS) (APP)	R3T	THERMISTOR (HEAT ETC. BECE) (APP)	Y1E	ELECTRONIC EXPANSION VALVE (MAIN) (APP)
A3P	PRINTED CIRCUIT BOARD (LIM. FAN)	K4R	MAGNETIC RELAY (Y3S) (APP)	R4T	THERMISTOR (HEAT ETC. BECE) (APP)	Y2E	ELECTRONIC EXPANSION VALVE (CHARGE) (APP)
A4P	PRINTED CIRCUIT BOARD (GROUND/LEAKAGE DETECT.)	K5R	MAGNETIC RELAY (Y3S) (APP)	R5T	THERMISTOR (SOB. COOL. HEAT ETC. GAS) (APP)	Y3E	ELECTRONIC EXPANSION VALVE (SHROUD) (APP)
B5T ~5	PUSH BUTTON SWITCH (MOD. SET, RETURN, TEST, RESET) (APP)	K6R	MAGNETIC RELAY (FOR OPTION) (APP)	R6T	THERMISTOR (SOB. COOL. HEAT ETC. LIQUID) (APP)	Y1S	SOLENOID VALVE (DMG) (APP)
C1	CAPACITOR	K7R	MAGNETIC RELAY (YTS) (APP)	R7T	THERMISTOR (HEAT ETC. LIQUID) (APP)	Y2S	SOLENOID VALVE (4 WAY VALVE) (PIPE) (APP)
E1C	CRANKCASE HEATER (APP)	K11R	MAGNETIC RELAY (Y4S) (APP)	R8T	THERMISTOR (SOB. COOL. HEAT ETC. LIQUID) (APP)	Y3S	SOLENOID VALVE (4 WAY VALVE) (HEAT ETC. APP)
F1U F2U F3U	FUSE (T. 3, 15A, 20A) (APP)	K18R	MAGNETIC RELAY (Y4S) (APP)	R9T	THERMISTOR (LIQUID) (APP)	Y4S	SOLENOID VALVE (SOLE) (APP)
F1U F2U F3U	FUSE (T. 3, 15A, 20A) (APP)	K18R	MAGNETIC RELAY (CURRENT LIMITING) (APP)	S1NPH	PRESSURE SENSOR (HEAT) (APP)	Y5S	SOLENOID VALVE (HOT GAS) (APP)
F1U F2U F3U	FUSE (T. 3, 15A, 20A) (APP)	K18R	MAGNETIC RELAY (CURRENT LIMITING) (APP)	S1NPL	PRESSURE SENSOR (LOW) (APP)	Y6S	SOLENOID VALVE (CY PRESS) (APP)
F1U	FUSE (1A, 0.5A) (APP)	M1C	MOTOR (COMPRESSOR)	S1PH	PRESSURE SWITCH (HIGH) (APP)	Y7S	SOLENOID VALVE (LOW) (APP)
F1P ~8P	PILOT LAMP (SERVICE MONITOR - BURNING) (APP)	M1F	MOTOR (FAN)	V1CP	CURRENT SENSOR (APP)	Y8S	SOLENOID VALVE (LOW) (APP)
H1P	PILOT LAMP (SERVICE MONITOR - LOCKING) (APP)	M1F	MOTOR (FAN)	V1CP	SAFETY DEVICES (MOT) (APP)	Y8S	SOLENOID VALVE (LOW) (APP)
H1P	PILOT LAMP (SERVICE MONITOR - LOCKING) (APP)	M1F	MOTOR (FAN)	V1CP	SAFETY DEVICES (MOT) (APP)	Z1E ~3C	NOISE FILTER (FERRITE CORE)
H1P	PILOT LAMP (SERVICE MONITOR - LOCKING) (APP)	M1F	MOTOR (FAN)	V1CP	SAFETY DEVICES (MOT) (APP)	Z1F	NOISE FILTER (WITH SURGE ABSORBER) (APP)
K1M, Z1W	MAGNETIC RELAY (MTC) (APP)	R17, R30Z	RESISTOR (CURRENT SENSOR) (APP)	V2B, X3B	POWER MODULE (APP)	X1M, X2A	CONNECTOR FOR OPTIONAL PARTS
K1R	MAGNETIC RELAY (Y5S) (APP)	R17, R30Z	RESISTOR (APP)	X1A, X2A	CONNECTOR (Y1E)	X1A	OPERATION OUTPUT (APP)
K2R	MAGNETIC RELAY (Y6S) (APP)	R17	RESISTOR (APP)	X1A, X2A	CONNECTOR (Y1E)	X3A	POWER SUPPLY (ADAPTER) (APP)
		R17	RESISTOR (APP)	X1M	TERMINAL STRIP (POWER SUPPLY)		

- NOTES)
1. THIS WIRING DIAGRAM IS APPLIED ONLY TO THE OUTDOOR UNIT.
 2. : FIELD WIRING.
 3. : TERMINAL STRIP.
 4. WHEN USING THE OPTIONAL ADAPTOR, REFER TO THE INSTALLATION MANUAL OF THE OPTIONAL ADAPTOR.
 5. FOR CONNECTION WIRING TO INDOOR-OUTDOOR TRANSMISSION F1 • F2, OUTDOOR-OUTDOOR TRANSMISSION F1 • F2, OUTDOOR-OUTDOOR TRANSMISSION Q1 • Q2, REFER TO THE INSTALLATION MANUAL.
 6. HOW TO USE B5T ~5, REFER TO "SERVICE PRECAUTION" LABEL ON ELECTRICAL COMPONENTS BOX LID.
 7. WHEN OPERATING, DON'T SHORT-CIRCUIT THE PROTECTION DEVICE(S) (S1PH).
 8. COLORS: BLK:BLACK; RED:RED; BLU:BLUE; WHT:WHITE; GRN:GREEN.

3D069810B

REM96PBTJ / REMQ120PBTJ

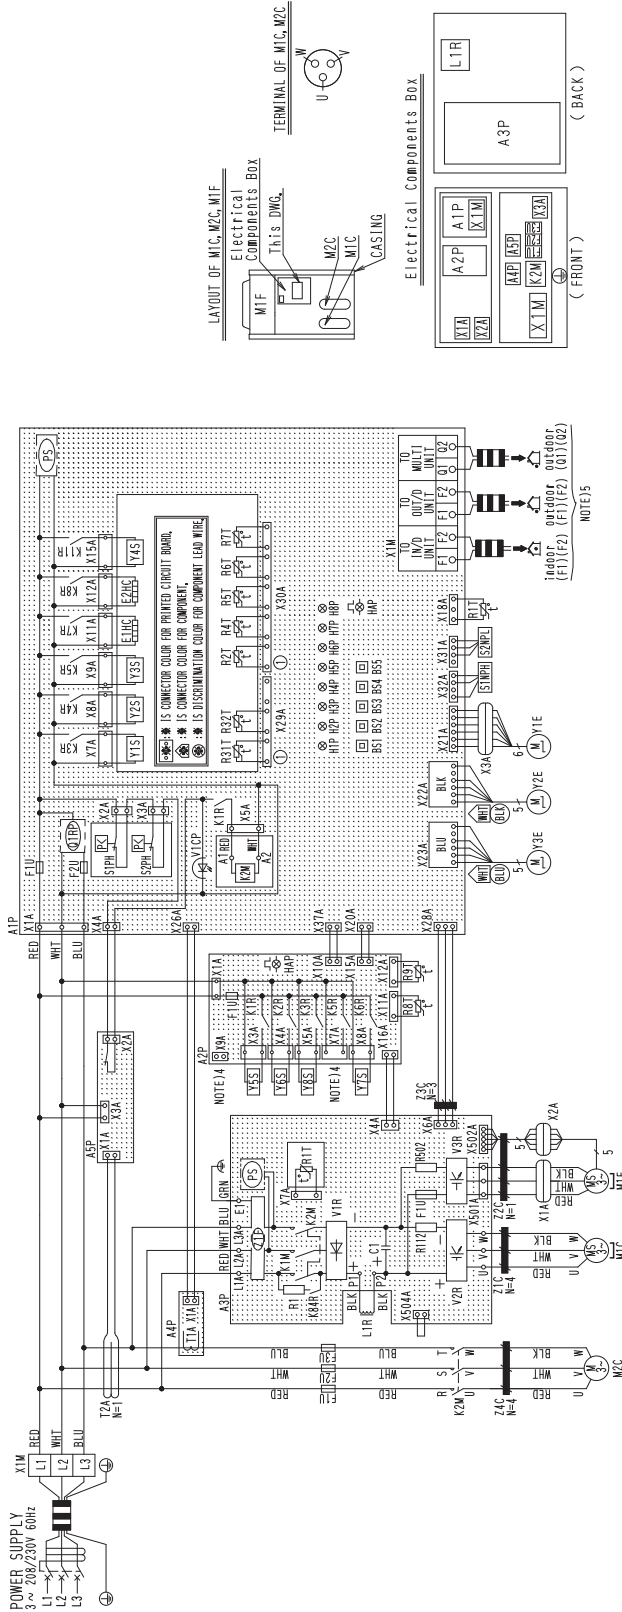

A1P	PRINTED CIRCUIT BOARD (MAIN)	K1R	MAGNETIC RELAY (Y55) (APP)	R1T	THERMISTOR (ENV) (APP)	X1W	TERMINAL STRIP (CONTROL) (APP)
A2P	PRINTED CIRCUIT BOARD (SUB)	K1R	MAGNETIC RELAY (Y55) (APP)	R2T	THERMISTOR (HEAT EXC) (APP)	Y1E	ELECTRONIC EXPANSION VALVE (MAIN) (APP)
A3P	PRINTED CIRCUIT BOARD (ENV)	K2R	MAGNETIC RELAY (Y63) (APP)	R3L, R3T	THERMISTOR (MIC, M2C, DISCHARGE) (APP)	Y2E	ELECTRONIC EXPANSION VALVE (CHARGE) (APP)
A4P	PRINTED CIRCUIT BOARD (CURRENT SENSOR)	K3R	MAGNETIC RELAY (Y65) (APP)	R4L	THERMISTOR (HEAT EXC, DETECTOR) (APP)	Y3E	ELECTRONIC EXPANSION VALVE (SUBSIDE) (APP)
A5P	PRINTED CIRCUIT BOARD (GROUND/DIAGNOSTIC)	K4R	MAGNETIC RELAY (Y55) (APP)	R5T	THERMISTOR (SUB COIL HEAT EXC, GAS) (APP)	Y7S	SOLENOID VALVE (FMG) (APP)
B5T~5	PIR BUTTON SWITCH	K5R	MAGNETIC RELAY (Y55) (APP)	R6T	THERMISTOR (SUB COIL HEAT EXC, LIQUID) (APP)	Y7S	SOLENOID VALVE (4 WAY VALVE) (APP)
C1	CAPACITOR	K6R	MAGNETIC RELAY (Y73) (APP)	R8T	THERMISTOR (HEAT EXC, LIQUID) (APP)	Y4S	SOLENOID VALVE (M2C) (APP)
E1G, E2G	CRANKCASE HEATER (APP)	K7R	MAGNETIC RELAY (E1G) (APP)	R9T	THERMISTOR (SUCTION) (APP)	Y5S	SOLENOID VALVE (HOT GAS) (APP)
F1U, F2U	FUSE (T, 3A, 250V) (APP)	K8R	MAGNETIC RELAY (E2G) (APP)	S1NPH	PRESSURE SENSOR (HIGH) (APP)	Y6S	SOLENOID VALVE (BY BYPASS) (APP)
F1U, F2U	FUSE (T, 3A, 250V) (APP)	K11R	MAGNETIC RELAY (Y65) (APP)	S2NPL	PRESSURE SENSOR (LOW) (APP)	Y7S	SOLENOID VALVE (M2C) (APP)
F1U	FUSE (16A, 10A/50V) (APP)	K24R	MAGNETIC RELAY (CURRENT LIMITING) (APP)	S2PL, S2PH	PRESSURE SWITCH (HIGH) (APP)	Y8S	SOLENOID VALVE (M2C) (APP)
F1U	FUSE (16A, 10A/50V) (APP)	L1R	REACTOR (APP)	T1A	CURRENT SENSOR (APP)	Z1C~4C	NOISE FILTER (FERRITE CORE)
H1P~8P	PIR LAMP/SERVICE UNIT (IR) (IR)	L1R	REACTOR (APP)	T2A	CURRENT SENSOR (APP)	Z1F	NOISE FILTER (WITH SHIELD) (APP)
H1P	PIR LAMP/SERVICE UNIT (IR) (IR)	M1C	MIC MOTOR (COMPRESSOR)	V1C	SAFETY SWITCH (APP)		
H1P	PIR LAMP/SERVICE UNIT (IR) (IR)	M1E	MIC MOTOR (EVAP)	V1P	SAFETY SWITCH (APP)		
H1P	PIR LAMP/SERVICE UNIT (IR) (IR)	P5	SPLITTING POWER SUPPLY (APP)	V1R	DIODE BRIDGE (APP)		
H1P	PIR LAMP/SERVICE UNIT (IR) (IR)	R1P	PHASE REVERSAL DEFECT CIRCUIT (APP)	Y2A, Y3R	POWER MODULE (APP)		
K1M, K2M	MAGNETIC RELAY (M2C) (APP)	R1P	PHASE REVERSAL DEFECT CIRCUIT (APP)	X1A, X2A	CONNECTOR (MIF)		
K2M	MAGNETIC RELAY (M2C) (APP)	R12A, R5Z	RESISTOR (CURRENT SENSOR) (APP)	X3A	CONNECTOR (RIT)		
K1R	MAGNETIC RELAY (K2M) (APP)	R1T	THERMISTOR (APP) (APP)	X1M	TERMINAL STRIP (POWER SUPPLY)		

- NOTES)
1. THIS WIRING DIAGRAM IS APPLIED ONLY TO THE OUTDOOR UNIT.
 2. : FIELD WIRING.
 3. : TERMINAL STRIP.
 4. WHEN USING THE OPTIONAL ADAPTOR, REFER TO THE INSTALLATION MANUAL OF THE OPTIONAL ADAPTOR.
 5. FOR CONNECTION WIRING TO INDOOR-OUTDOOR TRANSMISSION F1 + F2, OUTDOOR-OUTDOOR TRANSMISSION F1 + F2, OUTDOOR-MULTI TRANSMISSION 01 + 02, REFER TO THE INSTALLATION MANUAL.
 6. HOW TO USE B5T~5, REFER TO "SERVICE PRECAUTION" LABEL ON ELECTRICAL COMPONENTS BOX LTD.
 7. WHEN OPERATING DOWN T, SHORT CIRCUIT THE PROTECTION DEVICE (S1PH, S2PH).
 8. COLORS: BLK=BLACK, RED=RED, BLU=BLUE, WHT=WHITE, GRN=GREEN.


3D069811B

6. Field Wiring

REYQ72PTJU / REYQ96PTJU / REYQ120PTJU / REYQ144PBTJ

- 5) Unit shall be grounded in compliance with the applicable local and national codes.
 - 6) Wiring shown are general points-of-connection guides only and are not intended for or to include all details for a specific installation.
 - 7) Be sure to install the switch and the breaker/fuse to the power line of each piece of equipment.
 - 8) Install the main switch that can interrupt all the power sources in an integrated manner because this system consists of the equipment utilizing multiple power sources.
 - 9) If there exists the possibility of reversed phase, lost phase, momentary blackout or power goes on and off while the product is operating, attach a reversed phase protection circuit locally.
- Running the product in reversed phase may break the compressor and other parts.

- Notes 1) All wiring, components and materials to be procured on the site must comply with the applicable local and national codes.
- 2) Use copper conductors only.
- 3) As for details, see wiring diagram.
- 4) Field wiring diagram is to be used as a guideline only. Wiring should comply with applicable local and national codes.

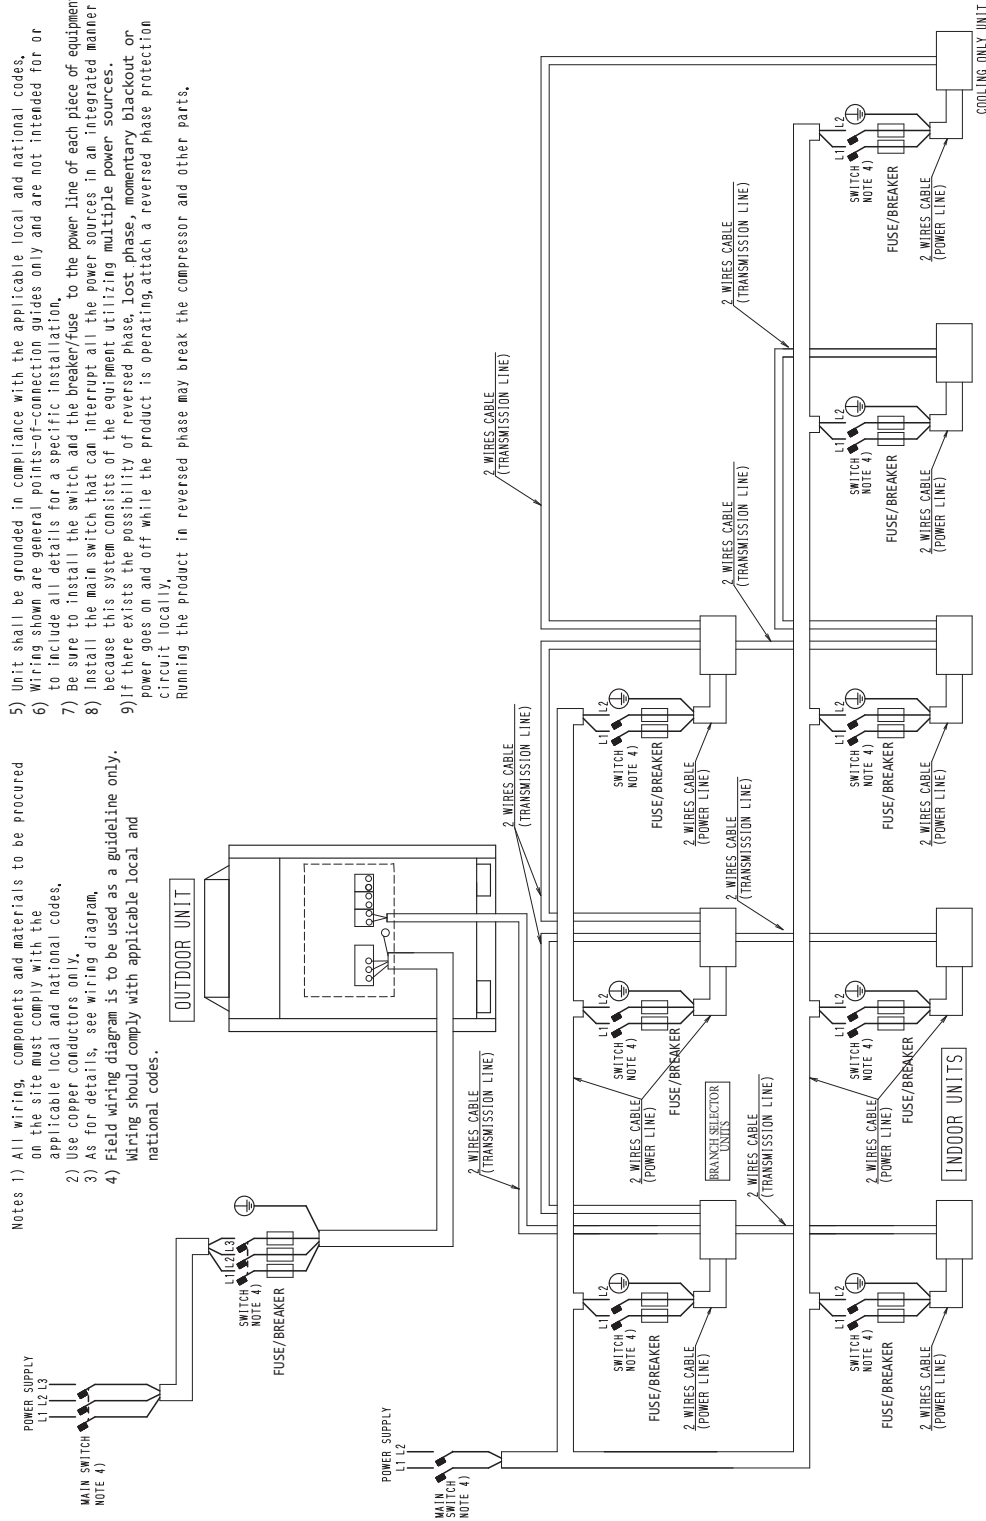


C: 3D058622D

REYQ168PBTJ / REYQ192PBTJ / REYQ216PBTJ / REYQ240PBTJ

- 5) Unit shall be grounded in compliance with the applicable local and national codes.
 - 6) Wiring shown are general points-of-connection guides only and are not intended for or to include all details for a specific installation.
 - 7) Be sure to install the switch and the breaker/fuse to the power line of each piece of equipment.
 - 8) Install the main switch that can interrupt all the power sources in an integrated manner because this system consists of the equipment utilizing multiple power sources.
 - 9) If there exists the possibility of reversed phase, lost phase, momentary blackout or power goes on and off while the product is operating, attach a reversed phase protection circuit locally.
- Running the product in reversed phase may break the compressor and other parts.

- Notes 1) All wiring, components and materials to be procured on the site must comply with the applicable local and national codes.
- 2) Use copper conductors only.
- 3) As for details, see wiring diagram.
- 4) Field wiring diagram is to be used as a guideline only. Wiring should comply with applicable local and national codes.

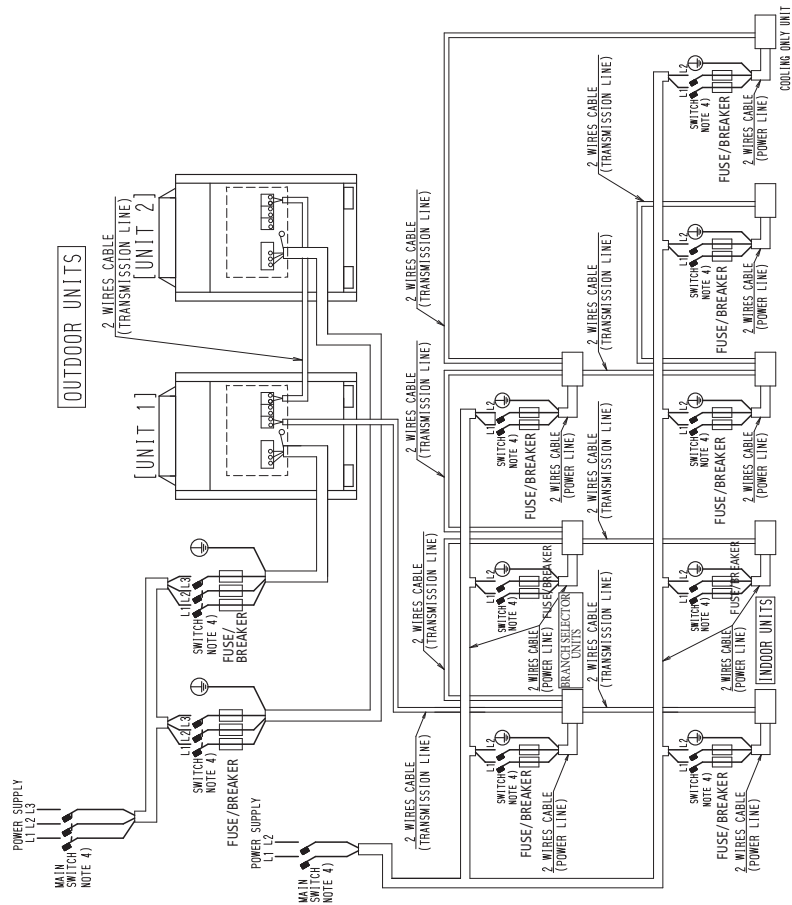


C: 3D059671D

REYQ264PBTJ / REYQ288PBTJ / REYQ312PBTJ / REYQ336PBTJ

3D070845


- Notes 1) All wiring, components and materials to be procured on the site must comply with the applicable local and national codes, to include all details for a specific installation.
- 2) Use copper conductors only.
- 3) As for details, see wiring diagram.
- 4) Field wiring diagram is to be used as a guideline only. Wiring should comply with applicable local and national codes.
- 5) Unit shall be grounded in compliance with the applicable local and national codes.
- 6) Wiring shown are general points-of-connection guides only and are not intended for or to include all details for a specific installation.
- 7) Be sure to install the switch and the breaker/fuse to the power line of each piece of equipment.
- 8) Install the main switch that can interrupt all the power sources in an integrated manner because this system consists of the equipment utilizing multiple power sources.
- 9) If there exists the possibility of reversed phase, lost phase, momentary blackout or power goes on and off while the product is operating, attach a reversed phase protection circuit locally.
- Running the product in reversed phase may break the compressor and other parts.

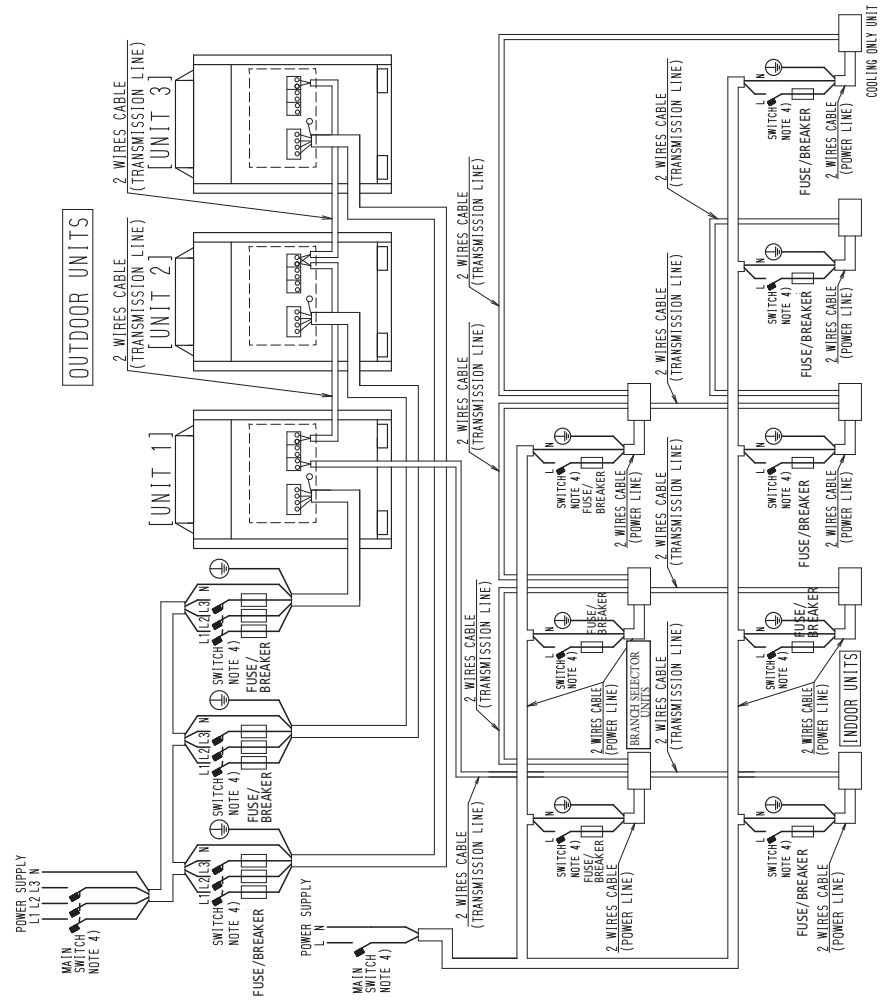

7. Electric Characteristics

Model Name	Units				Power Supply		Comp.		OFM	
Model Name	Hz	Volts	Min	Max	MCA	MOP	MSC	RLA	KW	FLA
REYQ72PTJU	60	208/230	187	253	36.1	40	131	4.8 + 14.0	0.35 x 2	1.2 + 1.2
REYQ96PTJU	60	208/230	187	253	43.8	45	131	8.4 + 14.0	0.35 x 2	1.2 + 1.2
REYQ120PTJU	60	208/230	187	253	44.2	50	131	12.0 + 13.6	0.35 x 2	1.4 + 1.4
REYQ144PBTJ	60	208/230	187	253	72.2	80	-	14.3 + 14.3	0.75 x 2	2.0 + 2.0

The relationship between the starting time and the starting current:

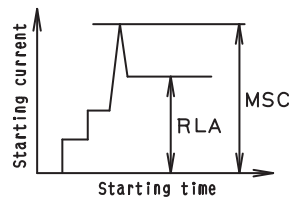

NOTES:


1. RLA is based on the following conditions:
Outdoor temp: 95° FDB
2. MSC means the maximum current during the starting of the compressor.
3. Voltage range:
Units are suitable for use on electrical systems where voltage supplied to unit terminal is not below
4. Maximum allowable voltage variation between phases is 2%.
5. Select wire size based on the value of MCA.
6. MOP is used to select the fuse, circuit breaker, or the ground fault circuit interrupter (ground leakage circuit breaker).

SYMBOLS:

- MCA: Minimum Circuit Amps. (A)
MOP: Maximum Overcurrent Protective Device (A) (See Note 6)
MSC: Maximum current when starting the compressor. (A)
RLA: Rate Load Amps (A)
OFM: Outdoor Fan Motor (A)
FLA: Full Load Amps (A)
KW: Fan Motor Rated Output

Model Name			Units				Power Supply		Comp.		OFM	
Combination Unit	Independent Units		Hz	Volts	Min	Max	MCA	MOP	MSC	RLA	KW	FLA
REYQ168PBTJ	REMQ72PBTJ	REMQ96PBTJ	60	208/ 230	187	253	28.8 + 36.1	40+50	137	14.2 + 7.8 + 16.8	0.75+0.75	1.2 + 1.6
REYQ192PBTJ	REMQ96PBTJ	REMQ96PBTJ	60	208/ 230	187	253	36.1 + 36.1	50+50	138	7.8 + 16.8 + 7.8 + 16.8	0.75+0.75	1.6 + 1.6
REYQ216PBTJ	REMQ96PBTJ	REMQ120PBTJ	60	208/ 230	187	253	36.1 + 41.3	50+60	154	7.8 + 16.8 + 12.2 + 16.8	0.75+0.75	1.6 + 2.0
REYQ240PBTJ	REMQ120PBTJ	REMQ120PBTJ	60	208/ 230	187	253	41.3 + 41.3	60+60	158	12.2 + 16.8 + 12.2 + 16.8	0.75+0.75	2.0+ 2.0

The relationship between the starting time and the starting current:

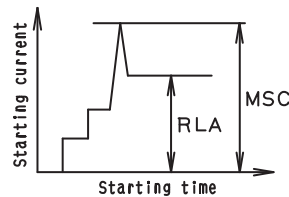

NOTES:


1. RLA is based on the following conditions:
 Indoor temp: 80° FDB / 67° FWB
 Outdoor temp: 95° FDB
2. MSC means the maximum current during the starting of the compressor.
3. Voltage range:
 Units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
4. Maximum allowable voltage variation between phases is 2%.
5. Select wire size based on the value of MCA.
6. MOP is used to select the fuse, circuit breaker, or the ground fault circuit interrupter (ground leakage circuit breaker).

SYMBOLS:

- MCA: Minimum Circuit Amps. (A) tive
- MOP: Maximum Overcurrent Protective Device (A) (See Note 6)
- MSC: Maximum current when starting the compressor. (A)
- RLA: Rate Load Amps (A)
- OFM: Outdoor Fan Motor (A)
- FLA: Full Load Amps (A)
- KW: Fan Motor Rated Output

Model Name				Units				Power Supply		Comp.		OFM	
Combination Unit	Independent Units			Hz	Volts	Min	Max	MCA	MOP	MSC	RLA	KW	FLA
REYQ264PBTJ	REMQ72PBTJ	REMQ96PBTJ	REYQ96PBTJ	60	208/ 230	187	253	28.8 + 36.1 + 36.1	40+50 +50	165	14.2 + (7.8 + 16.8) x 2	0.75 x 3	12.1 + 1.6 + 1.6
REYQ288PBTJ	REMQ72PBTJ	REMQ96PBTJ	REMQ120PBTJ	60	208/ 230	187	253	28.8 + 36.1 + 41.3	40+50 +60	166	14.2 + 7.8 + 16.8 + 12.2 + 16.8	0.75 x 3	1.2 + 1.6 + 2.0
REYQ312PBTJ	REMQ96PBTJ	REMQ96PBTJ	REMQ120PBTJ	60	208/ 230	187	253	36.1 + 36.1 + 41.3	50+50 +60	183	(7.8 + 16.8) x 2 + (12.2 + 16.8)	0.75 x 3	1.6 + 1.6 + 2.0
REYQ336PBTJ	REMQ96PBTJ	REMQ120PBTJ	REMQ120PBTJ	60	208/ 230	187	253	36.1 + 41.3 + 41.3	50+60 +60	184	7.8 + 16.8 + (12.2+16.8) x 2	0.75 x 3	1.6 + 2.0 + 2.0

The relationship between the starting time and the starting current:



NOTES:

1. RLA is based on the following conditions:
 Indoor temp: 80° FDB / 67° FWB
 Outdoor temp: 95° FDB
2. MSC means the maximum current during the starting of the compressor.
3. Voltage range:
 Units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
4. Maximum allowable voltage variation between phases is 2%.
5. Select wire size based on the value of MCA.
6. MOP is used to select the fuse, circuit breaker, or the ground fault circuit interrupter (ground leakage circuit breaker).

SYMBOLS:

- MCA: Minimum Circuit Amps. (A)
- MOP: Maximum Overcurrent Protective Device (A) (See Note 6)
- MSC: Maximum current when starting the compressor. (A)
- RLA: Rate Load Amps (A)
- OFM: Outdoor Fan Motor (A)
- FLA: Full Load Amps (A)
- KW: Fan Motor Rated Output

REYQ96PTJU

Combination	Outdoor air temp. °F	Indoor air temp. °FWB																Combination	Outdoor air temp. °F	Indoor air temp. °FWB															
		57		61		64		67		70		72		75		57				61		64		67		70		72		75					
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI			TC	PI	TC	PI	TC	PI	TC	PI	TC	PI						
130	23	81.0	2.85	98.5	3.56	112	4.11	125	4.67	135	5.05	137	4.95	139	4.80	23	56.1	1.94	68.2	2.37	77.3	2.71	86.4	3.07	95.5	3.43	102	3.68	111	4.06					
	30	81.0	2.94	98.5	3.67	112	4.24	125	4.83	132	5.01	134	4.91	136	4.75	30	56.1	2.00	68.2	2.44	77.3	2.80	86.4	3.16	95.5	3.54	102	3.80	111	4.20					
	40	81.0	3.06	98.5	3.85	112	4.45	125	5.06	128	4.94	129	4.83	132	4.67	40	56.1	2.08	68.2	2.55	77.3	2.93	86.4	3.32	95.5	3.72	102	3.99	111	4.41					
	50	81.0	3.24	98.5	4.05	112	4.68	121	5.03	123	4.86	125	4.75	127	4.58	50	56.1	2.18	68.2	2.68	77.3	3.07	86.4	3.48	95.5	3.91	102	4.20	111	4.63					
	54	81.0	3.30	98.5	4.14	112	4.78	119	5.00	122	4.83	123	4.72	126	4.63	54	56.1	2.22	68.2	2.73	77.3	3.13	86.4	3.56	95.5	3.99	102	4.28	111	4.73					
	58	81.0	3.37	98.5	4.22	112	4.88	117	4.97	120	4.86	122	4.89	124	4.92	58	56.1	2.26	68.2	2.78	77.3	3.20	86.4	3.63	95.5	4.07	102	4.38	111	4.83					
	62	81.0	3.44	98.5	4.32	112	4.99	116	5.11	118	5.15	120	5.17	122	5.21	62	56.1	2.30	68.2	2.84	77.3	3.27	86.4	3.71	95.5	4.16	102	4.47	111	4.94					
	66	81.0	3.52	98.5	4.45	112	5.35	114	5.39	116	5.44	118	5.46	121	5.51	66	56.1	2.35	68.2	2.90	77.3	3.34	86.4	3.79	95.5	4.26	102	4.65	111	5.29					
	70	81.0	3.64	98.5	4.81	112	5.63	112	5.68	115	5.73	116	5.76	119	5.80	70	56.1	2.40	68.2	2.96	77.3	3.41	86.4	3.98	95.5	4.60	102	5.04	110	5.63					
	72	81.0	3.78	98.5	5.00	109	5.78	111	5.82	114	5.87	115	5.90	118	5.95	72	56.1	2.42	68.2	3.00	77.3	3.54	86.4	4.14	95.5	4.78	102	5.24	109	5.77					
	75	81.0	3.99	98.5	5.30	108	5.99	110	6.04	113	6.09	114	6.12	117	6.17	75	56.1	2.46	68.2	3.16	77.3	3.74	86.4	4.38	95.5	5.06	102	5.55	107	5.99					
	79	81.0	4.30	98.5	5.71	106	6.28	108	6.33	111	6.38	112	6.42	115	6.47	79	56.1	2.64	68.2	3.40	77.3	4.03	86.4	4.71	95.5	5.46	102	5.98	106	6.27					
120	23	81.0	4.96	98.5	6.82	102	6.85	105	6.91	107	6.97	109	7.01	111	7.07	83	56.1	2.83	68.2	3.65	77.3	4.33	86.4	5.07	95.5	5.87	102	6.44	104	6.56					
	30	81.0	5.33	98.2	7.08	101	7.14	103	7.20	106	7.27	107	7.31	109	7.37	87	56.1	3.03	68.2	3.91	77.3	4.65	86.4	5.45	95.5	6.32	101	6.80	102	6.85					
	40	81.0	5.71	96.5	7.36	98.9	7.43	101	7.50	104	7.57	105	7.60	105	7.60	91	56.1	3.24	68.2	4.19	77.3	4.98	86.4	5.85	95.5	6.79	98.9	7.09	100	7.14					
	50	81.0	6.12	94.7	7.65	97.2	7.72	99.7	7.80	101	7.83	101	7.83	101	7.83	93	56.1	3.35	68.2	4.34	77.3	5.16	86.4	6.06	95.5	7.04	97.9	7.23	99.6	7.28					
	54	81.0	6.56	93.0	7.94	95.5	8.02	96.6	8.05	96.6	8.05	96.6	8.05	96.6	8.06	95	56.1	3.46	68.2	4.49	77.3	5.34	86.4	6.28	95.5	7.29	97.0	7.38	98.7	7.43					
	58	81.0	7.00	91.7	8.27	93.4	8.33	93.4	8.33	93.4	8.33	93.4	8.33	93.4	8.33	99	56.1	3.58	68.2	4.80	77.3	5.73	86.4	6.74	94.2	7.63	95.3	7.67	97.0	7.72					
	62	81.0	7.65	89.1	8.70	89.1	8.70	89.2	8.71	89.2	8.71	89.2	8.71	89.2	8.71	103	56.1	3.95	68.2	5.13	77.3	6.13	86.4	7.22	92.4	7.92	93.6	7.96	95.3	8.01					
	66	74.8	6.77	77.0	8.78	77.2	8.79	77.3	8.80	77.5	8.81	77.6	8.82	77.7	8.83	106	56.1	4.20	68.2	5.47	77.3	6.54	86.4	7.71	91.1	8.25	92.3	8.29	93.5	8.33					
	70	74.8	7.42	69.9	7.43	67.1	7.44	67.2	7.45	67.4	67.5	7.47	67.7	7.48	110	56.1	4.56	68.2	6.03	77.3	7.44	86.4	8.40	89.2	8.71	89.2	8.71	89.2	8.71	89.2	8.71				
	72	74.8	8.38	90.9	4.05	103	5.35	110	5.79	112	5.83	113	5.86	116	5.91	115	56.1	5.38	66.9	7.43	67.1	7.44	67.2	7.45	67.4	67.5	7.47	67.7	7.48	67.7	7.48				
	75	74.8	3.58	90.9	4.71	103	5.67	108	6.00	111	6.05	112	6.08	114	6.13	122	53.3	5.63	53.5	5.64	53.6	5.65	53.8	5.66	54.0	5.67	54.1	5.67	54.2	5.68					
	79	74.8	3.85	90.9	5.08	103	6.11	107	6.29	109	6.34	110	6.37	113	6.42	23	49.8	1.74	60.6	2.10	68.7	2.39	76.8	2.69	84.9	3.01	90.3	3.22	98.4	3.55					
83	74.8	4.13	90.9	5.46	103	6.53	105	6.58	107	6.63	109	6.67	111	6.72	30	49.8	1.78	60.6	2.16	68.7	2.46	76.8	2.78	84.9	3.10	90.3	3.32	98.4	3.67						
87	74.8	4.43	90.9	5.87	101	6.81	103	6.87	105	6.92	107	6.96	109	7.02	40	49.8	1.86	60.6	2.26	68.7	2.57	76.8	2.91	84.9	3.25	90.3	3.49	98.4	3.85						
91	74.8	4.76	90.9	6.31	99.1	7.10	101	7.16	104	7.22	105	7.26	107	7.32	50	49.8	1.94	60.6	2.36	68.7	2.70	76.8	3.05	84.9	3.41	90.3	3.66	98.4	4.04						
93	74.8	4.92	90.9	6.54	98.2	7.24	100	7.30	103	7.36	104	7.41	107	7.47	54	49.8	1.97	60.6	2.41	68.7	2.75	76.8	3.11	84.9	3.48	90.3	3.74	98.4	4.13						
95	74.8	5.10	90.9	6.77	97.3	7.39	99.6	7.45	102	7.51	103	7.56	105	7.60	58	49.8	2.01	60.6	2.45	68.7	2.81	76.8	3.18	84.9	3.56	90.3	3.82	98.4	4.22						
99	74.8	5.46	90.9	7.27	95.6	7.89	99.7	7.74	100	7.81	101	7.83	101	7.83	62	49.8	2.04	60.6	2.50	68.7	2.87	76.8	3.24	84.9	3.63	90.3	3.90	98.4	4.31						
103	74.8	5.94	90.9	7.90	93.9	7.97	96.1	8.04	96.6	8.05	96.7	8.06	96.7	8.06	66	49.8	2.08	60.6	2.55	68.7	2.93	76.8	3.31	84.9	3.71	90.3	3.99	98.4	4.44						
106	74.8	6.23	90.3	8.22	92.6	8.30	93.4	8.33	93.4	8.33	93.4	8.33	93.4	8.33	70	49.8	2.12	60.6	2.61	68.7	2.99	76.8	3.39	84.9	3.88	90.3	4.14	98.4	4.99						
110	74.8	6.80	88.5	8.68	89.1	8.70	89.1	8.73	89.2	8.73	89.2	8.73	89.2	8.73	72	49.8	2.15	60.6	2.63	68.7	3.02	76.8	3.51	84.9	4.03	90.3	4.41	98.4	4.99						
115	74.8	7.57	77.0	8.78	77.2	8.79	77.3	8.80	77.5	8.81	77.6	8.82	77.7	8.83	75	49.8	2.18	60.6	2.67	68.7	3.07	76.8	3.57	84.9	4.07	90.3	4.49	98.4	5.29						
118	66.7	7.42	66.9	7.43	67.1	7.44	67.2	7.45	67.4	67.5	7.47	67.7	7.48	79	49.8	2.29	60.6	2.92	68.7	3.19	76.8	3.99	84.9	4.60	90.3	5.02	98.4	5.70							
122	53.3	5.63	53.5	5.64	53.6	5.65	53.8	5.66	54.0	5.67	54.1	5.67	54.2	5.68	83	49.8	2.42	60.6	3.13	68.7	3.68	76.8	4.29	84.9	4.94	90.3	5.41	98.4	6.14						
23	68.5	2.38	83.4	2.95	94.5	3.39	106	3.85	117	4.32	124	4.64	135	5.08	87	49.8	2.62	60.6	3.35	68.7	3.95	76.8	4.61	84.9	5.31	90.3	5.81	98.4	6.60						
30	68.5	2.46	83.4	3.04	94.5	3.50	106	3.98	117	4.47	124	4.80	132	5.04	91	49.8	2.80	60.6	3.58	68.7	4.23	76.8	4.94	84.9	5.70	90.3	6.24	98.2	7.08						
40	68.5	2.57	83.4	3.18	94.5	3.67	106	4.17	117	4.69	124	5.03	127	4.97	93	49.8	2.89	60.6	3.68	68.7	4.38	76.8	5.11	84.9	5.91	90.3	6.47	97.3	7.22						
50	68.5	2.69	83.4	3.34	94.5	3.86	106	4.39																											

REYQ120PTJU

Table with columns for Combination, Outdoor air temp., Indoor air temp. °FWB, and Capacity (TC, PI, MBH, kW) for various conditions. Includes sub-sections for 130, 120, 110, and 100.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ144PBTJ

Combination	Outdoor air temp.	Indoor air temp. °FWB														Combination	Outdoor air temp.	Indoor air temp. °FWB													
		57		61		64		67		70		72		75				57		61		64		67		70		72		75	
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI			TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI		
23	121	4.27	148	5.32	167	6.15	187	6.99	203	7.56	205	7.41	209	7.19	23	84.1	2.91	102	3.55	116	4.06	130	4.59	143	5.14	152	5.51	166	6.08		
30	121	4.40	148	5.50	167	6.35	187	7.22	198	7.49	201	7.34	204	7.11	30	84.1	2.99	102	3.66	116	4.18	130	4.73	143	5.30	152	5.69	166	6.28		
40	121	4.61	148	5.76	167	6.66	187	7.58	192	7.39	194	7.23	198	6.99	40	84.1	3.12	102	3.82	116	4.38	130	4.96	143	5.56	152	5.97	166	6.60		
50	121	4.84	148	6.06	167	7.01	181	7.53	195	7.23	198	7.11	191	6.86	50	84.1	3.26	102	4.01	116	4.60	130	5.21	143	5.85	152	6.28	166	6.94		
54	121	4.94	148	6.19	167	7.16	179	7.49	182	7.23	185	7.06	189	6.93	54	84.1	3.32	102	4.08	116	4.69	130	5.32	143	5.97	152	6.41	166	7.08		
58	121	5.05	148	6.32	167	7.31	176	7.44	180	7.27	182	7.31	186	7.37	58	84.1	3.38	102	4.17	116	4.79	130	5.43	143	6.10	152	6.55	166	7.23		
62	121	5.16	148	6.46	167	7.47	174	7.64	177	7.40	180	7.74	183	7.80	62	84.1	3.45	102	4.25	116	4.89	130	5.55	143	6.23	152	6.69	166	7.39		
66	121	5.27	148	6.66	167	8.01	171	8.07	175	8.14	177	8.18	181	8.24	66	84.1	3.52	102	4.34	116	5.00	130	5.67	143	6.37	152	6.97	166	7.62		
70	121	5.44	148	7.20	165	8.43	168	8.50	172	8.57	174	8.62	178	8.68	70	84.1	3.59	102	4.44	116	5.11	130	5.96	143	6.88	152	7.54	164	8.43		
72	121	5.65	148	7.49	163	8.64	167	8.72	171	8.79	173	8.83	177	8.91	72	84.1	3.63	102	4.49	116	5.30	130	6.19	143	7.15	152	7.84	163	8.64		
75	121	5.98	148	7.93	161	8.96	165	9.04	169	9.11	171	9.16	175	9.24	75	84.1	3.69	102	4.73	116	5.60	130	6.55	143	7.57	152	8.30	161	8.96		
79	121	6.43	148	8.55	159	9.39	162	9.47	166	9.55	169	9.60	172	9.68	79	84.1	3.96	102	5.09	116	6.03	130	7.06	143	8.16	152	8.95	159	9.39		
83	121	6.92	148	9.21	156	9.82	160	9.91	164	9.99	166	10.00	170	10.1	83	84.1	4.24	102	5.46	116	6.48	130	7.59	143	8.79	152	9.64	156	9.81		
87	121	7.43	148	9.91	154	10.3	157	10.3	161	10.4	163	10.5	167	10.6	87	84.1	4.53	102	5.85	116	6.95	130	8.16	143	9.45	151	10.2	153	10.2		
91	121	7.97	147	10.6	151	10.7	155	10.8	158	10.9	161	10.9	164	11.0	91	84.1	4.85	102	6.27	116	7.46	130	8.76	143	10.12	148	10.6	151	10.7		
93	121	8.26	146	10.8	150	10.9	153	11.0	157	11.1	160	11.2	161	11.2	93	84.1	5.01	102	6.49	116	7.72	130	9.07	143	10.5	147	10.8	149	10.9		
95	121	8.55	145	11.0	148	11.1	152	11.2	156	11.3	158	11.4	158	11.4	95	84.1	5.18	102	6.71	116	8.00	130	9.40	143	10.9	146	11.0	148	11.1		
99	121	9.17	142	11.5	146	11.6	149	11.7	151	11.7	151	11.7	151	11.7	99	84.1	5.53	102	7.18	116	8.57	130	10.1	141	11.4	143	11.5	146	11.6		
103	121	9.82	139	11.9	143	12.0	145	12.1	145	12.1	145	12.1	145	12.1	103	84.1	5.90	102	7.68	116	9.18	130	10.8	139	11.9	140	11.9	143	12.0		
106	121	10.5	138	12.4	140	12.5	140	12.5	140	12.5	140	12.5	140	12.5	106	84.1	6.28	102	8.19	116	9.79	130	11.5	137	12.4	138	12.4	140	12.5		
110	121	11.1	134	13.0	134	13.0	134	13.0	134	13.0	134	13.0	134	13.0	110	84.1	6.84	102	8.93	116	10.7	130	12.6	134	13.0	134	13.0	134	13.0		
115	115	13.1	115	13.1	116	13.2	116	13.2	116	13.2	116	13.2	117	13.2	115	84.1	7.58	102	9.93	116	13.2	116	13.2	116	13.2	116	13.2	117	13.2		
118	100	11.1	100	11.1	101	11.1	101	11.2	101	11.2	101	11.2	101	11.2	118	84.1	8.05	100	11.1	101	11.1	101	11.2	101	11.2	101	11.2	101	11.2		
122	79.9	8.42	80.2	8.44	80.5	8.45	80.7	8.47	80.9	8.48	81.1	8.49	81.3	8.51	122	79.9	8.42	80.2	8.44	80.5	8.45	80.7	8.47	80.9	8.48	81.1	8.49	81.3	8.51		
23	112	3.91	136	4.86	155	5.60	173	6.37	191	7.16	202	7.60	205	7.40	23	74.8	2.60	90.9	3.14	103	3.58	115	4.03	127	4.50	135	4.82	148	5.31		
30	112	4.03	136	5.02	155	5.79	173	6.58	191	7.39	197	7.54	201	7.33	30	74.8	2.67	90.9	3.24	103	3.69	115	4.15	127	4.64	135	4.98	148	5.49		
40	112	4.22	136	5.26	155	6.07	173	6.91	189	7.58	191	7.44	194	7.22	40	74.8	2.78	90.9	3.38	103	3.85	115	4.35	127	4.86	135	5.22	148	5.76		
50	112	4.43	136	5.53	155	6.39	173	7.27	182	7.48	184	7.33	188	7.10	50	74.8	2.90	90.9	3.53	103	4.04	115	4.57	127	5.11	135	5.48	148	6.05		
54	112	4.52	136	5.64	155	6.52	173	7.42	179	7.44	182	7.28	185	7.04	54	74.8	2.95	90.9	3.60	103	4.12	115	4.66	127	5.22	135	5.60	148	6.18		
58	112	4.61	136	5.76	155	6.66	173	7.58	177	7.39	179	7.26	183	7.31	58	74.8	3.00	90.9	3.67	103	4.20	115	4.75	127	5.33	135	5.72	148	6.31		
62	112	4.71	136	5.89	155	6.81	171	7.60	174	7.66	177	7.69	180	7.75	62	74.8	3.06	90.9	3.74	103	4.29	115	4.85	127	5.44	135	5.84	148	6.45		
66	112	4.81	136	6.02	155	7.12	168	8.02	172	8.08	174	8.12	177	8.18	66	74.8	3.12	90.9	3.82	103	4.38	115	4.96	127	5.56	135	5.97	148	6.65		
70	112	4.92	136	6.15	155	7.70	166	8.45	169	8.51	171	8.56	175	8.62	70	74.8	3.18	90.9	3.90	103	4.47	115	5.07	127	5.81	135	6.35	148	7.19		
72	112	5.06	136	6.66	155	8.01	164	8.66	168	8.73	170	8.77	173	8.84	72	74.8	3.21	90.9	3.94	103	4.52	115	5.25	127	6.04	135	6.59	148	7.47		
75	112	5.35	136	7.05	155	8.48	162	8.98	166	9.05	168	9.10	171	9.17	75	74.8	3.26	90.9	4.06	103	4.78	115	5.55	127	6.39	135	6.98	148	7.91		
79	112	5.76	136	7.60	155	9.15	160	9.41	163	9.49	165	9.54	169	9.61	79	74.8	3.43	90.9	4.36	103	5.14	115	5.97	127	6.88	135	7.52	148	8.53		
83	112	6.18	136	8.18	154	9.77	157	9.84	161	9.92	163	9.98	166	10.1	83	74.8	3.67	90.9	4.68	103	5.51	115	6.42	127	7.40	135	8.09	148	9.19		
87	112	6.64	136	8.79	151	10.2	155	10.3	158	10.4	160	10.4	164	10.5	87	74.8	3.93	90.9	5.01	103	5.91	115	6.89	127	7.95	135	8.70	148	9.88		
91	112	7.12	136	9.44	149	10.6	152	10.7	155	10.8	158	10.9	161	10.9	91	74.8	4.19	90.9	5.36	103	6.33	115	7.39	127	8.53	135	9.34	147	10.6		
93	112	7.37	136	9.79	147	10.8	151	10.9	154	11.0	156	11.1	160	11.2	93	74.8	4.33	90.9	5.54	103	6.55	115	7.65	127	8.84	135	9.68	146	10.8		
95	112	7.63	136	10.1	146	11.1	149	11.1	153	11.2	155	11.3	158	11.4	95	74.8	4.47	90.9	5.73	103	6.78	115	7.92	127	9.16	135	10.0	144	11.0		
99	112	8.17	136	10.9	143	11.5	147	11.6	150	11.7	151	11.7	151	11.7	99	74.8	4.77	90.9	6.13	103	7.26	115	8.49	127	9.82	135	10.8	142	11.5		
103	112	8.75	136	11.7	141	11.9	144	12.0	145	12.1	145	12.1	145	12.1	103	74.8	5.09	90.9	6.54	103	7.76	115	9.09	127	10.5	135	11.5	139	11.9		
106	112	9.33	135	12.3	139	12.4	140	12.5	140	12.5	140	12.5	140	12.5	106	74.8	5.41	90.9	6.97	103	8.28	115	9.70	127	11.2	135	12.3	138	12.4		
110	112	10.2	133	13.0	134	13.0	134	13.0	134	13.0	134	13.0	134	13.0	110	74.8	5.87	90.9	7.59	103	9.02	115	10.6	127	12.						

REYQ168PBTJ

Combination	Outdoor air temp.	Indoor air temp. °FWB																Combination	Outdoor air temp.	Indoor air temp. °FWB																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																		
		57				61				64				67						70				72				75				57				61				64				67				70				72				75																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																														
		TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW			TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																															
23	142	4.93	172	6.14	195	7.09	218	8.07	236	8.73	239	8.56	244	8.30	23	98.1	3.36	119	4.10	135	4.68	151	5.30	167	5.93	178	6.36	194	7.02	210	7.62	223	8.15	230	8.65	238	9.15	240	9.65	242	10.15	244	10.65	246	11.15	248	11.65	250	12.15	252	12.65	254	13.15	256	13.65	258	14.15	260	14.65	262	15.15	264	15.65	266	16.15	268	16.65	270	17.15	272	17.65	274	18.15	276	18.65	278	19.15	280	19.65	282	20.15	284	20.65	286	21.15	288	21.65	290	22.15	292	22.65	294	23.15	296	23.65	298	24.15	300	24.65	302	25.15	304	25.65	306	26.15	308	26.65	310	27.15	312	27.65	314	28.15	316	28.65	318	29.15	320	29.65	322	30.15	324	30.65	326	31.15	328	31.65	330	32.15	332	32.65	334	33.15	336	33.65	338	34.15	340	34.65	342	35.15	344	35.65	346	36.15	348	36.65	350	37.15	352	37.65	354	38.15	356	38.65	358	39.15	360	39.65	362	40.15	364	40.65	366	41.15	368	41.65	370	42.15	372	42.65	374	43.15	376	43.65	378	44.15	380	44.65	382	45.15	384	45.65	386	46.15	388	46.65	390	47.15	392	47.65	394	48.15	396	48.65	398	49.15	400	49.65	402	50.15	404	50.65	406	51.15	408	51.65	410	52.15	412	52.65	414	53.15	416	53.65	418	54.15	420	54.65	422	55.15	424	55.65	426	56.15	428	56.65	430	57.15	432	57.65	434	58.15	436	58.65	438	59.15	440	59.65	442	60.15	444	60.65	446	61.15	448	61.65	450	62.15	452	62.65	454	63.15	456	63.65	458	64.15	460	64.65	462	65.15	464	65.65	466	66.15	468	66.65	470	67.15	472	67.65	474	68.15	476	68.65	478	69.15	480	69.65	482	70.15	484	70.65	486	71.15	488	71.65	490	72.15	492	72.65	494	73.15	496	73.65	498	74.15	500	74.65	502	75.15	504	75.65	506	76.15	508	76.65	510	77.15	512	77.65	514	78.15	516	78.65	518	79.15	520	79.65	522	80.15	524	80.65	526	81.15	528	81.65	530	82.15	532	82.65	534	83.15	536	83.65	538	84.15	540	84.65	542	85.15	544	85.65	546	86.15	548	86.65	550	87.15	552	87.65	554	88.15	556	88.65	558	89.15	560	89.65	562	90.15	564	90.65	566	91.15	568	91.65	570	92.15	572	92.65	574	93.15	576	93.65	578	94.15	580	94.65	582	95.15	584	95.65	586	96.15	588	96.65	590	97.15	592	97.65	594	98.15	596	98.65	598	99.15	600	99.65	602	100.15	604	100.65	606	101.15	608	101.65	610	102.15	612	102.65	614	103.15	616	103.65	618	104.15	620	104.65	622	105.15	624	105.65	626	106.15	628	106.65	630	107.15	632	107.65	634	108.15	636	108.65	638	109.15	640	109.65	642	110.15	644	110.65	646	111.15	648	111.65	650	112.15	652	112.65	654	113.15	656	113.65	658	114.15	660	114.65	662	115.15	664	115.65	666	116.15	668	116.65	670	117.15	672	117.65	674	118.15	676	118.65	678	119.15	680	119.65	682	120.15	684	120.65	686	121.15	688	121.65	690	122.15	692	122.65	694	123.15	696	123.65	698	124.15	700	124.65	702	125.15	704	125.65	706	126.15	708	126.65	710	127.15	712	127.65	714	128.15	716	128.65	718	129.15	720	129.65	722	130.15	724	130.65	726	131.15	728	131.65	730	132.15	732	132.65	734	133.15	736	133.65	738	134.15	740	134.65	742	135.15	744	135.65	746	136.15	748	136.65	750	137.15	752	137.65	754	138.15	756	138.65	758	139.15	760	139.65	762	140.15	764	140.65	766	141.15	768	141.65	770	142.15	772	142.65	774	143.15	776	143.65	778	144.15	780	144.65	782	145.15	784	145.65	786	146.15	788	146.65	790	147.15	792	147.65	794	148.15	796	148.65	798	149.15	800	149.65	802	150.15	804	150.65	806	151.15	808	151.65	810	152.15	812	152.65	814	153.15	816	153.65	818	154.15	820	154.65	822	155.15	824	155.65	826	156.15	828	156.65	830	157.15	832	157.65	834	158.15	836	158.65	838	159.15	840	159.65	842	160.15	844	160.65	846	161.15	848	161.65	850	162.15	852	162.65	854	163.15	856	163.65	858	164.15	860	164.65	862	165.15	864	165.65	866	166.15	868	166.65	870	167.15	872	167.65	874	168.15	876	168.65	878	169.15	880	169.65	882	170.15	884	170.65	886	171.15	888	171.65	890	172.15	892	172.65	894	173.15	896	173.65	898	174.15	900	174.65	902	175.15	904	175.65	906	176.15	908	176.65	910	177.15	912	177.65	914	178.15	916	178.65	918	179.15	920	179.65	922	180.15	924	180.65	926	181.15	928	181.65	930	182.15	932	182.65	934	183.15	936	183.65	938	184.15	940	184.65	942	185.15	944	185.65	946	186.15	948	186.65	950	187.15	952	187.65	954	188.15	956	188.65	958	189.15	960	189.65	962	190.15	964	190.65	966	191.15	968	191.65	970	192.15	972	192.65	974	193.15	976	193.65	978	194.15	980	194.65	982	195.15	984	195.65	986	196.15	988	196.65	990	197.15	992	197.65	994	198.15	996	198.65	998	199.15	1000	199.65	1002	200.15	1004	200.65	1006	201.15	1008	201.65	1010	202.15	1012	202.65	1014	203.15	1016	203.65	1018	204.15	1020	204.65	1022	205.15	1024	205.65	1026	206.15	1028	206.65	1030	207.15	1032	207.65	1034	208.15	1036	208.65	1038	209.15	1040	209.65	1042	210.15	1044	210.65	1046	211.15	1048	211.65	1050	212.15	1052	212.65	1054	213.15	1056	213.65	1058	214.15	1060	214.65	1062	215.15	1064	215.65	1066	216.15	1068	216.65	1070	217.15	1072	217.65	1074	218.15	1076	218.65	1078	219.15	1080	219.65	1082	220.15	1084	220.65	1086	221.15	1088	221.65	1090	222.15	1092	222.65	1094	223.15	1096	223.65	1098	224.15	1100	224.65	1102	225.15	1104	225.65	1106	226.15	1108	226.65	1110	227.15	1112	227.65	1114	228.15	1116	228.65	1118	229.15	1120	229.65	1122	230.15	1124	230.65	1126	231.15	1128	231.65	1130	232.15	1132	232.65	1134	233.15	1136	233.65	1138	234.15	1140	234.65	1142	235.15	1144	235.65	1146	236.15	1148	236.65	1150	237.15	1152	237.65	1154	238.15	1156	238.65	1158	239.15	1160	239.65	1162	240.15	1164	240.65	1166	241.15	1168	241.65	1170	242.15	1172	242.65	1174	243.15	1176	243.65	1178	244.15	1180	244.65	1182	245.15	1184	245.65	1186	246.15	1188	246.65	1190	247.15	1192	247.65	1194	248.15	1196	248.65	1198	249.15	1200	249.65	1202	250.15	1204	250.65	1206	251.15	1208	251.65	1210	252.15	1212	252.65	1214	253.15	1216	253.65	1218	254.15	1220	254.65	1222	255.15	1224	255.65	1226	256.15	1228	256.65	1230	257.15	1232	257.65	1234	258.15	1236	258.65	1238	259.15	1240	259.65	1242	260.15	1244	260.65	1246	261.15	1248	261.65	1250	262.15	1252	262.65	1254	263.15	1256	263.65	1258	264.15	1260	264.65	1262	265.15	1264	265.65	1266	266.15	1268	266.65	1270	267.15	1272	267.65	1274	268.15	1276	268.65	1278	269.15	1280	269.65	1282	270.15	1284	270.65	1286	271.15	1288	271.65	1290	272.15	1292	272.65	1294	273.15	1296	273.65	1298	274.15	1300	274.65	1302	275.15	1304	275.65	1306	276.15	1308	276.65	1310	277.15	1312	277.65	1314	278.15	1316	278.65	1318	279.15	1320	279.65	1322	280.15	1324	280.65	1326	281.15	1328	281.65	1330	282.15	1332	282.65	1334	283.15	1336	283.65	1338	284.15	1340	284.65	1342	285.15	1344	285.65	1346	286.15	1348	286.65	1350	287.15	1352	287.65	1354	288.15	1356	288.65	1358	289.15	1360	289.65	1362	290.15	1364	290.65	1366	291.15	1368	291.65	1370	292.15	1372	292.65	1374	293.15	1376	293.65	1378	294.15	1380	294.65	1382	295.15	1384	295.65	1386	296.15	1388	296.65	1390	297.15	1392	297.65	1394	298.15	1396	298.65	1398	299.15	1400	299.65	1402	300.15	1404	300.65	1406	301.15	1408	301.65	1410	302.15	1412	302.65	1414	303.15	1416	303.65	1418	304.15	1420	304.65	1422	305.15	1424</

REYQ216PBTJ

Combination	Outdoor air temp. °F	Indoor air temp. °FWB																								Combination	Outdoor air temp. °F	Indoor air temp. °FWB																							
		57		61		64		67		70		72		75		57		61		64		67		70				72		75																					
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI			TC	PI																						
130	23	182	7.26	222	9.05	251	10.4	281	11.9	304	12.9	308	12.6	313	12.2	23	126	4.95	153	6.03	174	6.90	194	7.80	215	8.73	229	9.37	249	10.3																					
	30	182	7.49	222	9.34	251	10.8	281	12.3	297	12.7	301	12.5	306	12.1	30	126	5.09	153	6.22	174	7.11	194	8.05	215	9.46	229	9.68	249	10.7																					
	40	182	7.84	222	9.80	251	11.3	281	12.9	287	12.6	291	12.3	297	11.9	40	126	5.30	153	6.50	174	7.45	194	8.44	215	9.46	229	10.2	249	11.2																					
	50	182	8.24	222	10.3	251	11.9	272	12.8	278	12.4	281	12.1	287	11.7	50	126	5.54	153	6.81	174	7.82	194	8.86	215	9.94	229	10.7	249	11.8																					
	54	182	8.40	222	10.5	251	12.2	268	12.7	274	12.3	277	12.0	283	11.8	54	126	5.64	153	6.94	174	7.98	194	9.05	215	10.1	229	10.9	249	12.0																					
	58	182	8.58	222	10.7	251	12.4	264	12.7	270	12.4	273	12.1	279	11.8	58	126	5.75	153	7.08	174	8.14	194	9.24	215	10.4	229	11.1	249	12.3																					
	62	182	8.76	222	11.0	251	12.7	260	13.0	266	13.1	270	13.2	275	13.3	62	126	5.86	153	7.23	174	8.31	194	9.44	215	10.6	229	11.4	249	12.6																					
	66	182	8.96	222	11.3	251	13.6	256	13.7	262	13.8	266	13.6	271	14.0	66	126	5.98	153	7.38	174	8.49	194	9.64	215	10.8	229	11.8	249	13.5																					
	70	182	9.25	222	12.2	247	14.3	253	14.5	258	14.6	262	14.6	267	14.8	70	126	6.10	153	7.54	174	8.68	194	10.1	215	11.7	229	12.8	247	14.3																					
	72	182	9.61	222	12.7	245	14.7	251	14.8	256	14.9	260	15.0	265	15.1	72	126	6.16	153	7.62	174	9.01	194	10.5	215	12.2	229	13.3	245	14.7																					
	75	182	10.2	222	13.5	242	15.2	248	15.4	253	15.5	257	15.6	262	15.7	75	126	6.27	153	8.04	174	9.53	194	11.1	215	12.9	229	14.1	242	15.2																					
	79	182	10.9	222	14.5	238	16.0	244	16.1	249	16.2	253	16.3	259	16.5	79	126	6.73	153	8.65	174	10.2	194	12.0	215	13.9	229	15.2	238	16.0																					
83	182	11.8	222	15.7	234	16.7	240	16.8	245	17.0	249	17.1	255	17.2	83	126	7.20	153	9.28	174	11.0	194	12.9	215	14.9	229	16.4	234	16.7																						
87	182	12.6	222	16.8	230	17.4	236	17.6	241	17.7	245	17.8	251	18.0	87	126	7.71	153	9.95	174	11.8	194	13.9	215	16.1	226	17.3	230	17.4																						
91	182	13.6	221	18.0	226	18.2	232	18.3	238	18.5	241	18.6	246	18.7	91	126	8.24	153	10.7	174	12.7	194	14.9	215	17.3	222	18.0	226	18.2																						
93	182	14.0	219	18.4	225	18.5	230	18.7	236	18.9	239	19.0	241	19.1	93	126	8.52	153	11.0	174	13.1	194	15.4	215	17.9	220	18.4	224	18.5																						
95	182	14.5	217	18.7	223	18.9	228	19.1	234	19.3	237	19.3	237	19.3	95	126	8.81	153	11.4	174	13.6	194	16.0	215	18.6	218	18.8	222	18.9																						
99	182	15.6	213	19.5	219	19.7	224	19.8	227	19.9	227	19.9	227	19.9	99	126	9.40	153	12.2	174	14.6	194	17.1	212	19.4	214	19.5	218	19.6																						
103	182	16.7	209	20.2	215	20.4	217	20.5	217	20.5	217	20.5	217	20.5	103	126	10.0	153	13.1	174	15.6	194	18.4	208	20.2	211	20.3	214	20.4																						
106	182	17.8	206	21.0	210	21.2	210	21.2	210	21.2	210	21.2	210	21.2	106	126	10.7	153	13.9	174	16.6	194	19.6	205	21.0	208	21.1	210	21.2																						
110	182	19.5	200	22.1	200	22.1	201	22.1	201	22.1	201	22.1	201	22.2	110	126	11.6	153	15.2	174	18.2	194	21.4	201	22.1	201	22.1	201	22.2																						
115	173	22.3	173	22.3	174	22.4	174	22.4	174	22.4	175	22.4	175	22.5	115	126	12.9	153	16.9	174	22.4	174	22.4	174	22.4	175	22.4	175	22.5																						
118	150	18.9	151	18.9	151	18.9	151	19.0	152	19.0	152	19.0	152	19.0	118	126	13.7	151	18.9	151	19.0	151	19.0	152	19.0	152	19.0	152	19.0																						
122	120	14.3	120	14.3	121	14.4	121	14.4	121	14.4	122	14.4	122	14.5	122	120	14.3	120	14.3	120	14.3	121	14.4	121	14.4	121	14.4	122	14.5																						
120	23	168	6.65	205	8.26	232	9.53	259	10.8	287	12.2	303	12.9	308	12.6	23	112	4.42	136	5.35	155	6.08	173	6.85	191	7.65	203	8.19	221	9.03																					
	30	168	6.86	205	8.53	232	9.84	259	11.2	287	12.6	296	12.8	301	12.5	30	112	4.54	136	5.50	155	6.27	173	7.06	191	7.89	203	8.46	221	9.33																					
	40	168	7.18	205	8.94	232	10.3	259	11.7	283	12.9	286	12.6	291	12.3	40	112	4.72	136	5.74	155	6.55	173	7.39	191	8.27	203	8.87	221	9.78																					
	50	168	7.53	205	9.40	232	10.9	259	12.4	273	12.7	277	12.5	282	12.1	50	112	4.93	136	6.01	155	6.87	173	7.76	191	8.69	203	9.32	221	10.3																					
	54	168	7.68	205	9.59	232	11.1	259	12.6	269	12.6	273	12.4	278	12.0	54	112	5.01	136	6.12	155	7.00	173	7.92	191	8.87	203	9.51	221	10.5																					
	58	168	7.84	205	9.80	232	11.3	259	12.9	265	12.6	269	12.3	274	12.4	58	112	5.10	136	6.24	155	7.14	173	8.08	191	9.05	203	9.72	221	11.0																					
	62	168	8.01	205	10.0	232	11.6	256	12.9	261	13.0	265	13.1	270	13.2	62	112	5.20	136	6.36	155	7.29	173	8.25	191	9.25	203	9.93	221	11.7																					
	66	168	8.18	205	10.2	232	12.1	252	13.6	257	13.7	261	13.8	266	13.9	66	112	5.30	136	6.49	155	7.44	173	8.43	191	9.45	203	10.1	221	11.3																					
	70	168	8.36	205	10.9	232	13.1	248	14.4	254	14.5	257	14.5	262	14.7	70	112	5.40	136	6.63	155	7.61	173	8.62	191	9.68	203	10.8	221	12.2																					
	72	168	8.61	205	11.3	232	13.6	247	14.7	252	14.8	255	14.9	260	15.0	72	112	5.46	136	6.70	155	7.69	173	8.93	191	10.3	203	11.2	221	12.7																					
	75	168	9.10	205	12.0	232	14.4	244	15.3	249	15.4	252	15.5	257	15.6	75	112	5.54	136	6.91	155	8.12	173	9.44	191	10.9	203	11.9	221	13.5																					
	79	168	9.79	205	12.9	232	15.6	240	16.0	245	16.1	248	16.2	253	16.3	79	112	5.84	136	7.42	155	8.73	173	10.2	191	11.7	203	12.8	221	14.5																					
83	168	10.5	205	13.9	231	16.6	236	16.7	241	16.9	244	17.0	249	17.1	83	112	6.25	136	7.95	155	9.37	173	10.9	191	12.6	203	13.8	221	15.6																						
87	168	11.3	205	14.9	227	17.3	232	17.5	237	17.6	240	17.7	246	17.9	87	112	6.67	136	8.52	155	10.0	173	11.7	191	13.5	203	14.8	221	16.8																						
91	168	12.1	205	16.1	223	18.1	228	18.2	233	18.4	237	18.5	242	18.6	91	112	7.13	136	9.11	155	10.8	173	12.6	191	14.5	203	15.9	221	18.0																						
93	168	12.5	205	16.6	221	18.4	226	18.6	231	18.7	235	18.8	240	19.0	93	112	7.36	136	9.42	155	11.1	173	13.0	191	15.0	203	16.5	219	18.4																						
95	168	13.0	205	17.2	219	18.8	224	19.0	229	19.1	233	19.2	237	19.3	95	112	7.60	136	9.74	155	11.5	173	13.5	191	15.6	203	17.1	217	18.7																						
99	168	13.9	205	18.5	215	19.5	220	19.7	225	19.9	227	19.9	227	19.9	99	112	8.11	136	10.4	155	12.3	173	14.4	191	16.7	203	18.3	213	19.5																						
103	168	14.9	205	19.8	211	20.3	216	20.5	217	20.5	217	20.5	217	20.5	103	112	8.64	136	11.1	155	13.2	173</																													

REYQ264PBTJ

Large data table with columns for Combination, Outdoor air temp., Indoor air temp. °FWB, and Capacity (TC, PI, MBH, kW) for various conditions. The table is organized into four main sections based on indoor air temperature ranges (70°F, 72°F, 75°F, 77°F).

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ336PBTJ

Table with 14 columns: Combination, Outdoor air temp., % FDB, and indoor air temp. °FWB (TC, PI, MBH) for 57, 61, 64, 67, 70, 72, 75. Includes rows for 130, 120, 110, and 100 capacity levels.

Table with 14 columns: Combination, Outdoor air temp., % FDB, and indoor air temp. °FWB (TC, PI, MBH) for 57, 61, 64, 67, 70, 72, 75. Includes rows for 90, 80, 70, and 60 capacity levels.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

8.2 Heating Capacity (REYQ-P)

REYQ72PTJU

Large data table with multiple columns for indoor air temperature (61, 65, 68, 70, 72, 75) and outdoor air temperature (-3.64 to 60.0). It includes sub-tables for different combinations (90, 80, 70, 60) and rows for Total Capacity (TC) and Power Input (PI) in MBH and kW.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ120PTJU

Combi-nation	Outdoor air temp.	Indoor air temp. °FDB																				
		61				65				68				72				75				
		TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	
%	*FDB	*FWB	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW
130	-3.64	-4.0	78.2	4.65	77.8	5.29	77.6	5.78	77.4	6.10	77.2	6.42	76.9	6.90								
	-1.84	-2.2	79.5	4.84	79.2	5.47	78.9	5.94	78.7	6.26	78.5	6.57	78.2	7.00								
	9.5	8.5	89.4	6.02	89.0	6.57	88.8	6.99	88.6	7.27	88.4	7.55	88.1	7.97								
	13.0	12.0	93.3	6.41	93.0	6.94	92.7	7.34	92.5	7.61	92.3	7.88	92.0	8.28								
	15.0	14.0	95.8	6.64	95.4	7.16	95.1	7.54	94.9	7.80	94.7	8.06	94.4	8.45								
	17.0	15.5	97.6	6.81	97.3	7.31	97.0	7.69	96.8	7.95	96.6	8.20	96.3	8.58								
	19.0	18.0	101	7.08	101	7.57	100	7.94	100	8.19	99.9	8.43	100	8.80								
	22.0	20.0	104	7.30	103	7.78	103	8.14	103	8.37	103	8.61	102	8.97								
	26.0	24.0	110	7.73	109	8.18	109	8.51	109	8.74	108	8.96	108	9.30								
	30.0	28.0	116	8.14	115	8.56	115	8.88	115	9.09	115	9.30	115	9.62								
	35.0	32.0	123	8.53	122	8.93	122	9.23	122	9.43	122	9.62	121	9.92								
	39.0	36.0	130	8.90	129	9.27	129	9.55	129	9.74	129	9.93	129	10.2								
44.0	40.0	138	9.24	137	9.60	137	9.86	137	10.0	137	10.2	136	10.5									
47.0	43.0	144	9.49	143	9.83	143	10.1	143	10.3	143	10.4	142	10.7									
51.0	47.0	152	9.81	152	10.1	151	10.4	151	10.5	151	10.7	151	10.9									
54.0	50.0	159	10.0	158	10.3	158	10.6	158	10.7	158	10.9	157	11.1									
57.0	53.0	166	10.2	165	10.5	165	10.7	165	10.9	165	11.0	159	10.7									
60.0	56.0	173	10.4	173	10.7	172	10.9	172	11.1	169	10.9	159	10.2									

TC: Total capacity ; MBH
 PI: Power Input ; kW (Comp.+Outdoor fan motor)
 Note1: is shown as reference.
 Note2: The above table shows the average value of conditions which may occur.

REYQ144PBTJ

Capacity tables for REYQ144PBTJ. The table is organized into three main sections for indoor air temperatures of 70, 72, and 75 °FDB. Each section contains sub-tables for outdoor air temperatures ranging from -3.64 to 60.0 °FDB and -1.84 to 60.0 °FWB. The columns represent Total Capacity (TC) and Power Input (PI) in MBH and kW for various combinations. The rows represent different combinations of conditions, with some cells shaded in grey to indicate reference values.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: [Grey Box] is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ168PBTJ

Table with columns for Combination, Outdoor air temp., Indoor air temp. °FDB (61, 65, 68, 70, 72, 75), and Capacity (TC, PI, MBH, kW) for various conditions.

Table with columns for Combination, Outdoor air temp., Indoor air temp. °FDB (61, 65, 68, 70, 72, 75), and Capacity (TC, PI, MBH, kW) for various conditions.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ192PBTJ

Combi-nation	Outdoor air temp.	Indoor air temp. °FDB															Combi-nation	Outdoor air temp.	Indoor air temp. °FDB														
		61		65		68		70		72		75		61		65			68		70		72		75								
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC			PI	TC	PI	TC	PI	TC	PI	TC	PI						
%	°FDB	°FWB	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW	MBH	kW							
130	-3.64	-4.0	146	13.0	145	14.2	144	15.1	144	15.8	144	16.2	144	16.7	143	17.4	-3.64	-4.0	142	13.0	141	14.2	145	14.9	144	15.6	144	16.4	146	17.1			
	-1.84	-2.2	148	13.3	148	14.4	147	15.3	147	16.0	146	16.4	146	16.9	146	17.6	-1.84	-2.2	145	13.3	144	14.7	148	15.5	147	16.3	147	17.0	148	17.8			
	5.5	5.0	160	14.5	160	15.4	159	16.1	159	16.5	159	16.5	159	16.5	159	16.5	159	5.5	5.0	157	14.5	157	15.4	156	16.3	156	17.1	156	17.8				
	9.5	8.5	167	15.1	166	16.0	166	16.6	166	17.0	166	17.0	165	17.5	165	18.0	18.3	9.5	8.5	163	15.1	163	16.0	163	16.3	163	16.3	163	16.3	163	16.3		
	13.0	12.0	174	15.7	174	16.5	173	17.1	173	17.6	173	18.0	172	18.4	172	18.8	19.2	13.0	12.0	171	15.7	171	16.5	170	17.1	170	17.1	170	17.1	170	17.1		
	15.0	14.0	179	16.1	178	16.9	178	17.5	178	17.9	177	18.3	177	18.7	18.0	18.8	19.2	15.0	14.0	176	16.1	176	16.9	176	17.5	175	176	176	176	176	176		
	17.0	15.5	182	16.3	182	17.1	181	17.7	181	18.1	181	18.5	180	19.0	18.9	19.1	19.1	17.0	15.5	180	16.3	180	17.1	179	17.9	179	179	179	179	179	179		
	19.0	18.0	189	16.8	188	17.5	188	18.1	187	18.5	187	18.8	187	19.1	19.1	19.1	19.1	19.0	18.0	186	16.8	186	17.5	186	18.1	186	186	186	186	186	186		
	22.0	20.0	194	17.1	193	17.8	193	18.4	193	18.8	192	19.1	192	19.2	19.2	19.2	19.2	22.0	20.0	191	17.1	191	17.8	190	18.4	190	190	190	190	190	190		
	26.0	24.0	205	17.8	204	18.5	204	19.0	204	19.3	203	19.7	203	20.0	20.0	20.0	20.0	26.0	24.0	202	17.8	202	18.5	201	19.1	201	201	201	201	201	201		
	30.0	28.0	217	18.4	216	19.1	216	19.6	216	19.9	215	20.2	215	20.7	20.7	20.7	20.7	30.0	28.0	214	18.4	214	19.1	213	19.8	213	213	213	213	213	213		
	35.0	32.0	230	19.0	229	19.6	229	20.1	228	20.4	228	20.7	228	21.1	21.1	21.1	21.1	35.0	32.0	227	19.0	227	19.6	226	20.1	226	226	226	226	226	226		
39.0	36.0	243	19.6	243	20.2	242	20.5	242	20.9	242	21.2	241	21.6	21.6	21.6	21.6	39.0	36.0	240	19.6	240	20.2	239	20.7	239	239	239	239	239	239			
44.0	40.0	258	20.2	257	20.7	257	21.1	257	21.4	256	21.7	255	21.9	21.9	21.9	21.9	44.0	40.0	255	20.2	255	20.7	254	21.1	254	254	254	254	254	254			
47.0	43.0	269	20.5	269	21.1	268	21.5	268	21.7	268	22.0	265	20.7	20.7	20.7	20.7	47.0	43.0	266	20.5	266	21.1	265	21.6	265	265	265	265	265	265			
51.0	47.0	285	21.0	285	21.5	284	21.9	281	21.7	280	22.0	275	21.9	21.9	21.9	21.9	51.0	47.0	282	21.0	282	21.5	281	21.9	280	280	280	280	280	280	280		
54.0	50.0	298	21.4	297	21.9	291	21.5	281	20.6	270	19.6	255	18.3	18.3	18.3	54.0	50.0	295	21.4	295	21.9	294	21.4	293	21.4	293	293	293	293	293	293		
57.0	53.0	311	21.7	307	21.7	291	20.4	281	19.5	270	18.6	255	17.3	17.3	17.3	57.0	53.0	308	21.7	308	21.7	307	21.7	306	21.7	306	306	306	306	306	306		
60.0	56.0	325	22.0	307	20.6	291	19.3	281	18.5	270	17.7	255	16.4	16.4	16.4	60.0	56.0	322	22.0	322	22.0	321	22.0	320	22.0	320	320	320	320	320	320		

TC: Total capacity ; MBH
 PI: Power Input ; kW (Comp.+Outdoor fan motor)
 Note1: █ is shown as reference.
 Note2: The above table shows the average value of conditions which may occur.

REYQ216PBTJ

Large data table with columns for Outdoor air temp., Indoor air temp. °FDB (61, 65, 68, 70, 72, 75), and rows for combinations 130, 120, 110, 100. Each row contains multiple columns for TC, PI, MBH, kW, and %.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.
Note2: The above table shows the average value of conditions which may occur.

REYQ240PBTJ

Large data table with columns for Outdoor air temp., Indoor air temp. °FDB, and various capacity metrics (TC, PI, MBH, kW) across different conditions.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ264PBTJ

Combination	Outdoor air temp.		Indoor air temp. °FDB																										
			61				65				68				72				75										
			TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW	TC	PI	MBH	kW							
130	%	°FDB	°FDB	19.7	20.0	19.3	20.0	20.3	19.9	20.9	19.9	21.6	19.9	22.6	22.2	20.1	19.6	20.0	20.8	19.9	21.7	19.9	22.3	19.8	23.0	19.8	23.2		
	-3.64	-4.0	201	17.9	200	19.3	200	20.3	199	20.9	199	21.6	199	22.6	22.2	20.1	19.6	20.0	20.8	19.9	21.7	19.9	22.3	19.8	23.0	19.8	23.2		
	-1.84	-2.2	205	18.3	204	19.6	203	20.6	203	21.3	203	21.9	202	22.9	22.6	205	20.2	204	21.9	202	21.3	203	21.9	202	22.9	22.6			
	5.5	5.0	221	20.0	220	21.2	220	22.1	219	22.7	219	23.3	218	24.2	24.2	221	21.2	220	22.1	219	22.7	219	23.3	218	24.2	24.2			
	9.5	8.5	230	20.8	230	21.9	229	22.8	229	23.4	228	24.0	228	24.8	24.8	230	21.9	229	22.8	229	23.4	228	24.0	228	24.8	24.8			
	13.0	12.0	241	21.6	240	22.7	239	23.5	239	24.1	239	24.7	238	25.5	25.5	241	21.6	240	22.7	239	23.5	239	24.1	239	24.7	238	25.5		
	15.0	14.0	247	22.1	246	23.2	246	24.0	245	24.5	245	25.0	244	25.9	25.9	247	22.1	246	23.2	246	24.0	245	24.5	245	25.0	244	25.9		
	17.0	15.5	252	22.4	251	23.5	251	24.3	250	24.8	250	25.3	249	26.1	26.1	252	22.4	251	23.5	251	24.3	250	24.8	250	25.3	249	26.1		
	19.0	18.0	261	23.0	260	24.0	259	24.8	259	25.3	258	25.8	258	26.6	26.6	261	23.0	260	24.0	259	24.8	259	25.3	258	25.8	258	26.6		
	22.0	20.0	268	23.5	267	24.5	266	25.2	266	25.7	266	26.2	265	26.9	26.9	268	23.5	267	24.5	266	25.2	266	25.7	266	26.2	265	26.9		
	30.0	24.0	283	24.4	282	25.3	282	26.0	281	26.5	281	26.9	280	27.6	27.6	30.0	24.0	283	24.4	282	25.3	282	26.0	281	26.5	281	26.9	280	27.6
	35.0	32.0	317	26.0	316	26.9	316	27.5	315	27.9	315	28.3	314	28.9	28.9	35.0	32.0	317	26.0	316	26.9	316	27.5	315	27.9	315	28.3	314	28.9
39.0	36.0	336	26.8	335	27.6	335	28.2	334	28.6	334	28.9	333	29.5	29.5	39.0	36.0	336	26.8	335	27.6	335	28.2	334	28.6	334	28.9	333	29.5	
44.0	40.0	356	27.5	355	28.3	355	28.8	354	29.2	354	29.6	350	29.7	29.7	44.0	40.0	356	27.5	355	28.3	355	28.8	354	29.2	354	29.6	350	29.7	
47.0	43.0	372	28.0	371	28.7	371	29.3	370	29.6	370	30.0	350	28.1	28.1	47.0	43.0	372	28.0	371	28.7	371	29.3	370	29.6	370	30.0	350	28.1	
51.0	47.0	394	28.7	393	29.4	393	29.9	386	29.4	372	28.1	350	26.1	26.1	51.0	47.0	394	28.7	393	29.4	393	29.9	386	29.4	372	28.1	350	26.1	
54.0	50.0	412	29.2	411	29.8	400	29.1	386	27.8	372	26.6	350	24.7	24.7	54.0	50.0	412	29.2	411	29.8	400	29.1	386	27.8	372	26.6	350	24.7	
57.0	53.0	430	29.6	422	29.4	400	27.6	386	26.3	372	25.2	350	23.4	23.4	57.0	53.0	430	29.6	422	29.4	400	27.6	386	26.3	372	25.2	350	23.4	
60.0	56.0	449	30.0	422	27.8	400	26.1	386	25.0	372	23.9	350	22.2	22.2	60.0	56.0	449	30.0	422	27.8	400	26.1	386	25.0	372	23.9	350	22.2	

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: [shaded] is shown as reference.
Note2: The above table shows the average value of conditions which may occur.

REYQ288PBTJ

Main data table with columns for Combination, Outdoor air temp., Indoor air temp. °FDB, and sub-columns for 61, 65, 68, 70, 72, 75. It includes rows for 130, 120, 110, and 100 capacity units.

TC: Total capacity ; MBH
Pl: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: [shaded] is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ312PBTJ

Table with 4 main sections for indoor air temp. °FDB and °FDB, each with columns for Combina-tion, Outdoor air temp., and various indoor air temp. conditions (61, 65, 68, 70, 72, 75) for TC, PI, and MBH. Rows include percentage ranges and numerical values.

TC: Total capacity ; MBH
PI: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: [shaded cell] is shown as reference.

Note2: The above table shows the average value of conditions which may occur.

REYQ336PBTJ

Table with 14 columns: Combi-nation, Outdoor air temp., and Indoor air temp. °FDB (61, 65, 68, 70, 72, 75). Rows include various combinations of % and temperature values.


Table with 14 columns: Combi-nation, Outdoor air temp., and Indoor air temp. °FDB (61, 65, 68, 70, 72, 75). Rows include various combinations of % and temperature values.

TC: Total capacity ; MBH
Pl: Power Input ; kW (Comp.+Outdoor fan motor)
Note1: is shown as reference.
Note2: The above table shows the average value of conditions which may occur.


8.3 Capacity Correction Factor

REYQ72PTJU / REYQ216PBTJ

1. Rate of change in cooling capacity

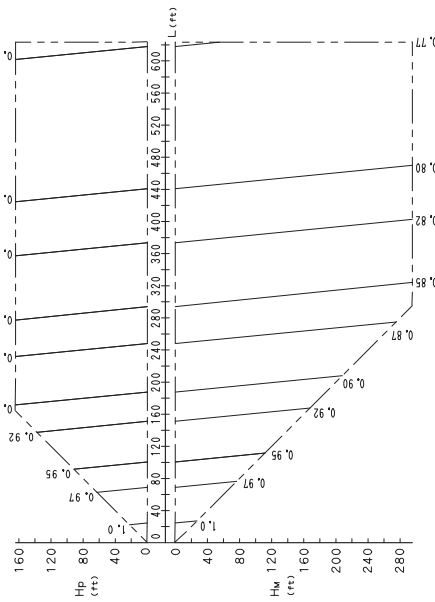

2. Rate of change in heating capacity

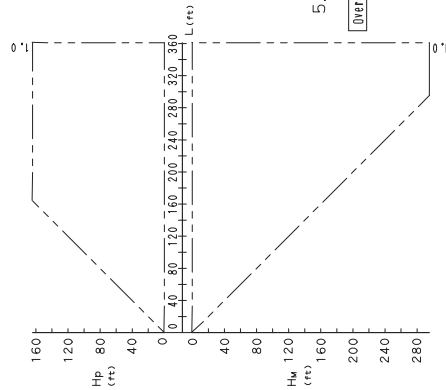

[Explanation of symbols]

Hp : Level difference(ft)between indoor and outdoor units where indoor unit in inferior position

Hm: Level difference(ft)between indoor and outdoor units where indoor unit in superior position

L : Equivalent pipe length(ft)

α : Capacity correction factor

[Diameter of pipe(Standard size)]

Model	liquid
REYQ72PTJU	φ 3/8
REYQ216PBTJ	φ 5/8

5. When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)
 Overall equivalent length=Equivalent length to main pipe×correction factor+Equivalent length after branching

[Choose a correction factor from the following table]

Model	Correction factor
REYQ72PTJU	0.2
REYQ216PBTJ	0.4

- [Notes]
- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
 - With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
 - The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller, Calculating A/C capacity of outdoor units
 - Condition: Indoor unit combination ratio does not exceed 100%.

[Maximum A/C capacity of outdoor units] = A/C capacity of outdoor units obtained from capacity characteristic table at the 100% combination

X [Capacity change rate due to piping length to the farthest indoor unit]


[Maximum A/C capacity of outdoor units] = A/C capacity of outdoor units obtained from capacity characteristic table at the combination

X [Capacity change rate due to piping length to the farthest indoor unit]

4. When overall equivalent pipe length is 295,3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased. When level difference is 164,0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.

[Diameter of above case]


Model	liquid
REYQ72PTJU	φ 1/2
REYQ216PBTJ	φ 3/4

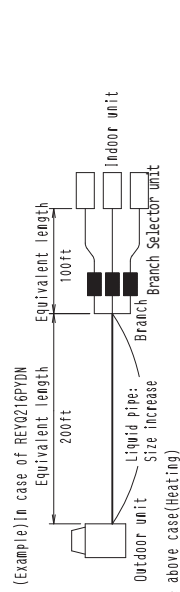

(Example) In case of REYQ216PBTJ
 Overall equivalent length=200ft×0.4+100ft=180ft
 In the above case(Heating)

The correction factor in capacity when Hp=0ft is thus approximately 1.0.
 Overall equivalent length=200ft×0.5+100ft=200ft

6. In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.
 Overall equivalent length=Equivalent length to main pipe×0.5+Equivalent length after branching

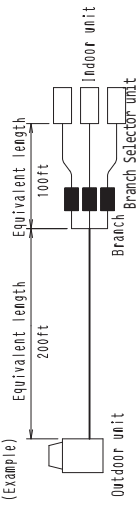


(Example)
 Overall equivalent length=200ft×0.5+100ft=200ft
 In the above case(Cooling)


The correction factor in capacity when Hp=0m is thus approximately 0.89.

REYQ96PTJU

1. Rate of change in cooling capacity

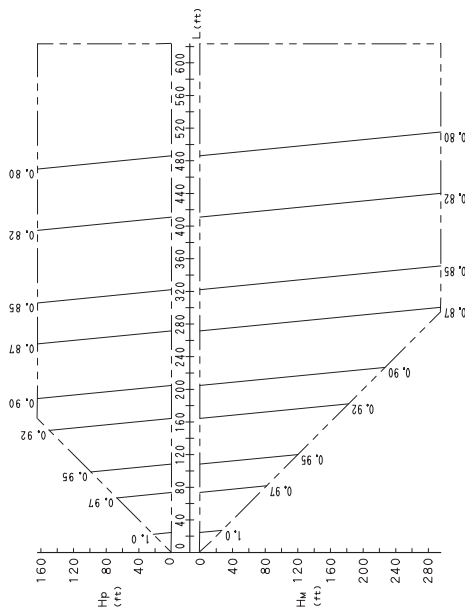

2. Rate of change in heating capacity

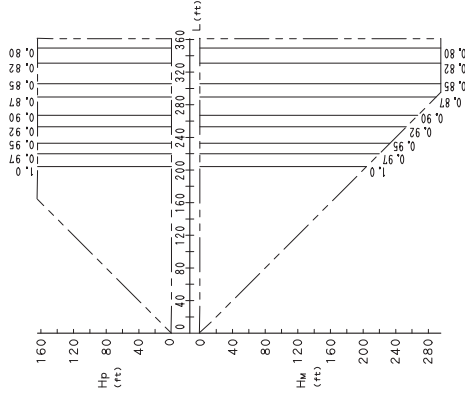

[Explanation of symbols]
 Hp : Level difference(ft)between indoor and outdoor units
 where indoor unit in inferior position
 Hm: Level difference(ft)between indoor and outdoor units
 where indoor unit in superior position
 L : Equivalent pipe length(ft)
 α : Capacity correction factor
 [Diameter of pipe(Standard size)]

Model	Liquid
REYQ96PTJU	ϕ 3/8


[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
 With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units
 • Condition: Indoor unit combination ratio does not exceed 100%.

$$\text{Maximum A/C capacity of outdoor units} = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{X(Capacity change rate due to piping length to the farthest indoor unit)}}$$
 • Condition: Indoor unit combination ratio exceeds 100%.


$$\text{Maximum A/C capacity of outdoor units} = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{X(Capacity change rate due to piping length to the farthest indoor unit)}} \times \text{X(Capacity change rate due to piping length to the farthest indoor unit-branch sections)}$$
 When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]
- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
 When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]

Model	Liquid
REYQ96PTJU	ϕ 1/2

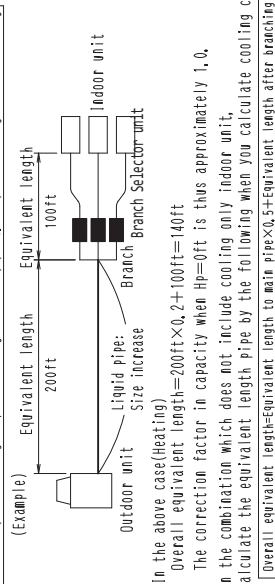


REYQ120PTJU / REYQ168PBTJ / REYQ264PBTJ / REYQ288PBTJ

1. Rate of change in cooling capacity

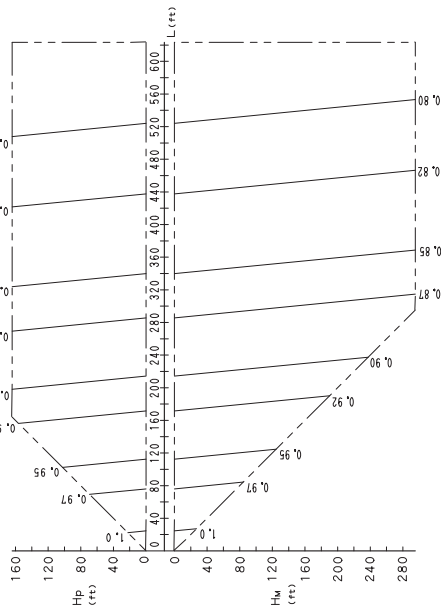

2. Rate of change in heating capacity

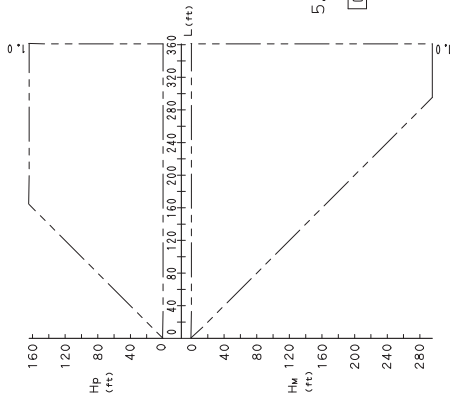

[Explanation of symbols]

Hp: Level difference(ft)between indoor and outdoor units
 Where indoor unit in inferior position
 Hm: Level difference(ft)between indoor and outdoor units
 Where indoor unit in superior position


L : Equivalent pipe length(ft)
 α : Capacity correction factor
 [Diameter of pipe(Standard size)]

Model	liquid
REYQ120PTJU	φ 1/2
REYQ168PBTJ	φ 5/8
REYQ264PBTJ	φ 3/4
REYQ288PBTJ	φ 3/4

5. When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (heating only)
 Overall equivalent length=Equivalent length to main pipe×Correction factor+Equivalent length after branching
 [Choose a correction factor from the following table]

Model	Correction factor
REYQ120PTJU	0.3
REYQ168PBTJ	0.4
REYQ264PBTJ	
REYQ288PBTJ	

(Example) In case of REYQ18PY1

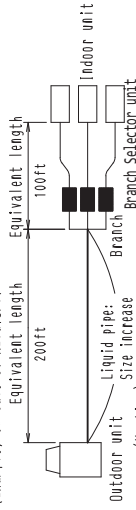


In the above case(heating)
 Overall equivalent length=200ft×0.4+100ft=180ft

The correction factor in capacity when Hp=0ft is thus approximately 1.0.

6. In the combination which does not include cooling only indoor unit, calculate the equivalent length pipe by the following when you calculate cooling capacity,
 Overall equivalent length=Equivalent length to main pipe×0.5+Equivalent length after branching

(Example)

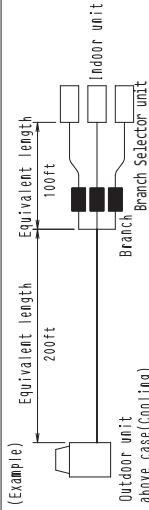

In the above case(Cooling)
 Overall equivalent length=200ft×0.5+100ft=200ft

The correction factor in capacity when Hp=0ft is thus approximately 0.91,

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units.
 • Condition: Indoor unit combination ratio does not exceed 100%.
 Maximum A/C capacity of outdoor units = A/C capacity of outdoor units obtained from capacity characteristic table at the 100% combination
 × Capacity change rate due to piping length to the farthest indoor unit

• Condition: Indoor unit combination ratio exceeds 100%.

Maximum A/C capacity of outdoor units = A/C capacity of outdoor units obtained from capacity characteristic table at the combination

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit


× Capacity change rate due to piping length to the farthest indoor unit

× Capacity change rate due to piping length to the farthest indoor unit


Model	liquid
REYQ120PTJU	φ 5/8
REYQ168PBTJ	φ 3/4
REYQ264PBTJ	φ 7/8
REYQ288PBTJ	φ 7/8

REYQ144PBTJ

1. Rate of change in cooling capacity

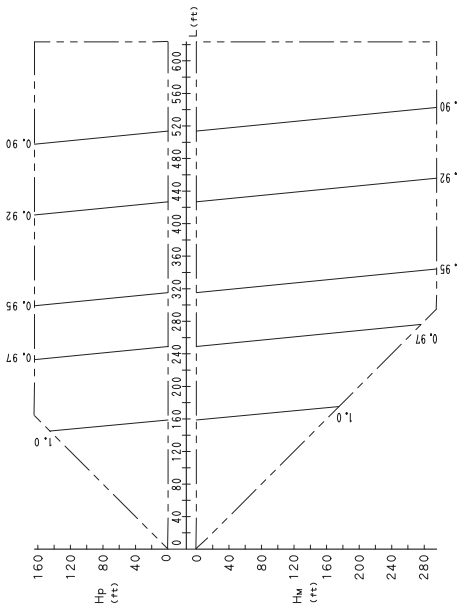

2. Rate of change in heating capacity

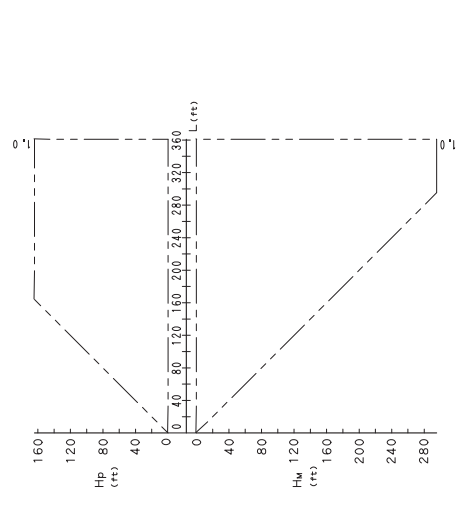

[Explanation of symbols]
 Hp : Level difference(ft)between indoor and outdoor units where indoor unit in inferior position
 Hm: Level difference(ft)between indoor and outdoor units where indoor unit in superior position
 L : Equivalent pipe length(ft)
 α : Capacity correction factor
 [Diameter of pipe(Standard size)]

Model	liquid
REYQ144PBTJ	φ 1/2

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum)under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units
 • Condition: Indoor unit combination ratio does not exceed 100%.
 $\text{Maximum A/C capacity of outdoor units} = \text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}$
 X Capacity change rate due to piping length to the farthest indoor unit
 • Condition: Indoor unit combination ratio exceeds 100%.
 $\text{Maximum A/C capacity of outdoor units} = \text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}$
 X Capacity change rate due to piping length to the farthest indoor unit
- When overall equivalent pipe length is 295,3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased. When level difference is 164,0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]


Model	liquid
REYQ144PBTJ	φ 5/8
- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)
 $\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.3 + \text{Equivalent length after branching}$
 (Example)

In the above case (Heating)
 Overall equivalent length = 200ft × 0.3 + 100ft = 60ft
 The correction factor in capacity when Hp=0ft is thus approximately 1.0.
 In the combination which does not include cooling only indoor unit, calculate the equivalent length pipe by the following when you calculate cooling capacity.
 $\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.5 + \text{Equivalent length after branching}$
 (Example)


In the above case (Cooling)
 Overall equivalent length = 200ft × 0.5 + 100ft = 200ft
 The correction factor in capacity when Hp=0ft is thus approximately 0.98.

REYQ192PBTJ / REYQ312PBTJ / REYQ336PBTJ

1. Rate of change in cooling capacity

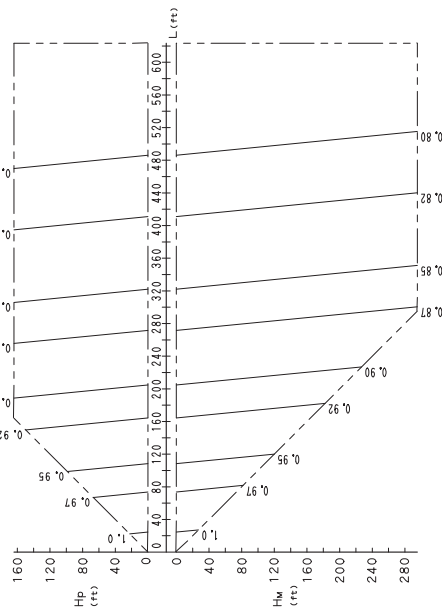

2. Rate of change in heating capacity

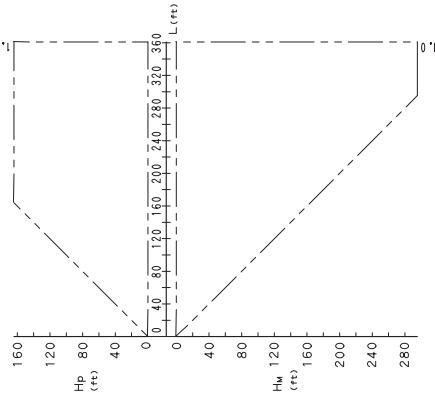

[Explanation of symbols]

Hp : Level difference(ft)between indoor and outdoor units

where indoor unit in inferior position

Hw: Level difference(ft)between indoor and outdoor units

where indoor unit in superior position

L : Equivalent pipe length(ft)

α : Capacity correction factor

[Diameter of pipe(Standard size)]

Model	Liquid
REYQ192PBTJ	φ 5/8
REYQ312PBTJ	φ 3/4
REYQ336PBTJ	φ 3/4

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
Calculating A/C capacity of outdoor units
 - Condition: Indoor unit combination ratio does not exceed 100%.

$$\text{Maximum A/C capacity of outdoor units} = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}}$$
 - Condition: Indoor unit combination ratio exceeds 100%.

$$\text{Maximum A/C capacity of outdoor units} = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}}$$
- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
[Diameter of above case]

Model	Liquid
REYQ192PBTJ	φ 3/4
REYQ312PBTJ	φ 7/8
REYQ336PBTJ	φ 7/8

- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

$$\text{Overall equivalent length} = \text{equivalent length to main pipe} \times 0.4 + \text{equivalent length after branching}$$

(Example)

In the above case (Heating)
Overall equivalent length = 200ft × 0.4 + 100ft = 180ft
The correction factor in capacity when Hp=0ft is thus approximately 1.0.
In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.
- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.


$$\text{Overall equivalent length} = \text{equivalent length to main pipe} \times 0.5 + \text{equivalent length after branching}$$

(Example)


In the above case (Cooling)
Overall equivalent length = 200ft × 0.5 + 100ft = 200ft
The correction factor in capacity when Hp=0ft is thus approximately 0.90.

REYQ240PBTJ

2. Rate of change in heating capacity

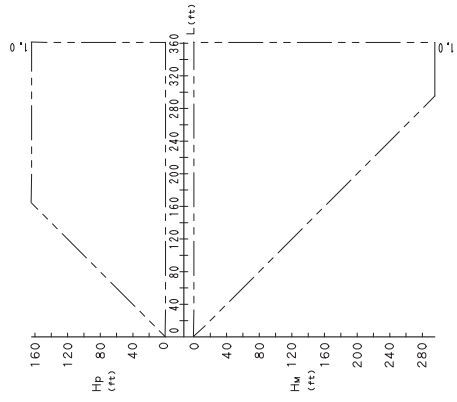

1. Rate of change in cooling capacity

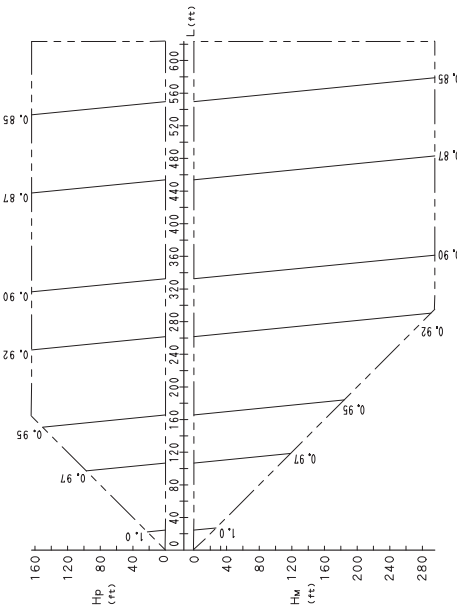

[Explanation of symbols]
 Hp : Level difference(ft)between indoor and outdoor units
 where Indoor unit in inferior position
 Hw: Level difference(ft)between indoor and outdoor units
 where Indoor unit in superior position
 L : Equivalent pipe length(ft)
 α : Capacity correction factor
 [Diameter of pipe(Standard size)]

Model	Liquid
REYQ240PBTJ	φ 5/8

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table of the maximum A/C capacity of outdoor units as mentioned below, whichever smaller,
 Calculating A/C capacity of outdoor units
 • Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{A/C capacity of indoor unit}}$$
 • Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{A/C capacity of indoor unit}}$$
 • Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{A/C capacity of indoor unit}}$$
- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
 When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]

Model	Liquid
REYQ240PBTJ	φ 3/4
- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.4 + \text{Equivalent length after branching}$$

(Example)

In the above case(Heating)
 Overall equivalent length = 200ft × 0.4 + 100ft = 180ft
 The correction factor in capacity when Hp=0ft is thus approximately 1.0.
 In the combination which does not include cooling only indoor unit,
 Calculate the equivalent length pipe by the following when you calculate cooling capacity.

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.5 + \text{Equivalent length after branching}$$


(Example)

In the above case(Cooling)
 Overall equivalent length = 200ft × 0.5 + 100ft = 200ft
 The correction factor in capacity when Hp=0ft is thus approximately 0.94.

C: 3D059673A

9. Operation Limits

REYQ72PTJU / REYQ96PTJU / REYQ120PTJU / REYQ144PBTJ / REYQ168PBTJ / REYQ192PBTJ /
 REYQ216PBTJ / REYQ240PBTJ / REYQ264PBTJ / REYQ288PBTJ / REYQ312PBTJ / REYQ336PBTJ

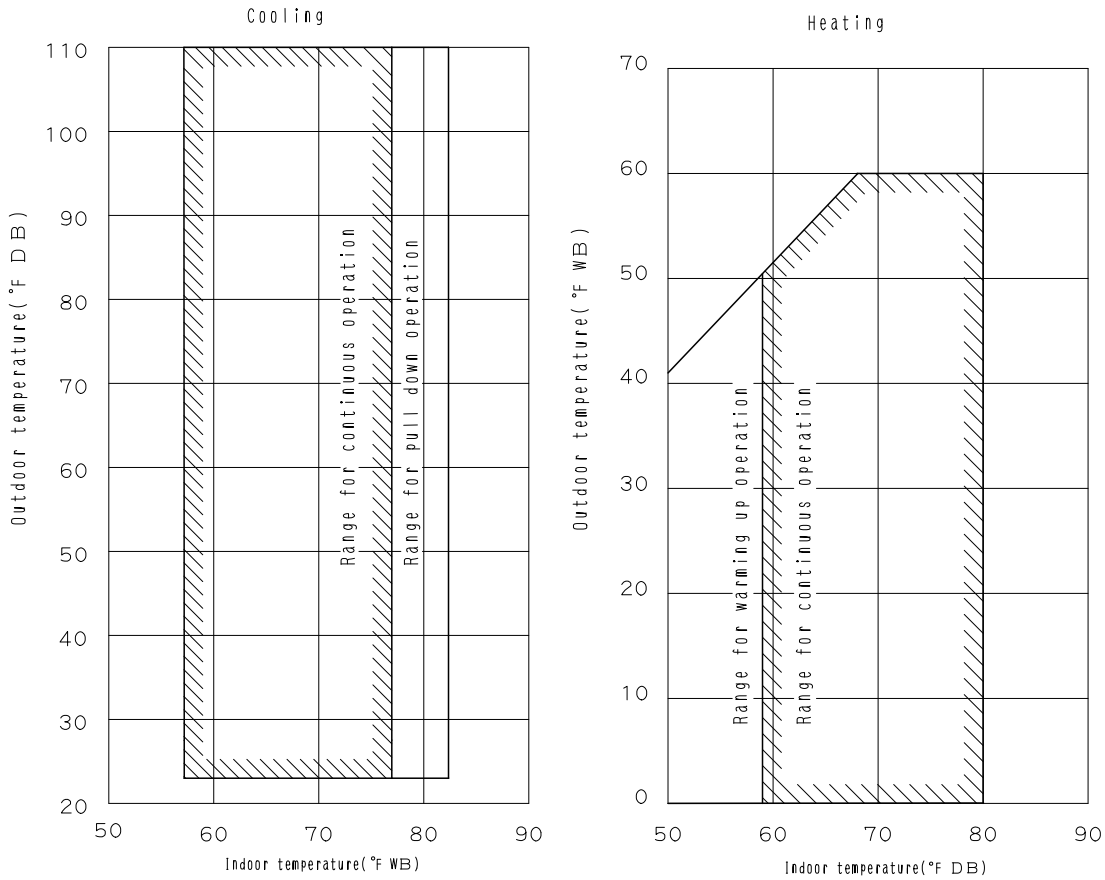


3D043026E

Note: These figures assume the following operating conditions:
 Indoor and outdoor units:
 Equivalent pipe length: 25ft
 Level difference: 0

NOTE: See Capacity Tables for Reference Cooling Capacities above 110°F.

10. Low Ambient Cooling Enhancement

- The VRV III PB product will include a new feature for Low Ambient Cooling
- The function enhances VRV III PB Heat Recovery systems as follows:
 - Allows Operation to -4°F (-20°C) in Cooling Mode Normal limit is 23°F (-5°C)
 - Operation below 23°F (-5°C) ambient temperature requires the addition of wind covers onto the condensing unit.*

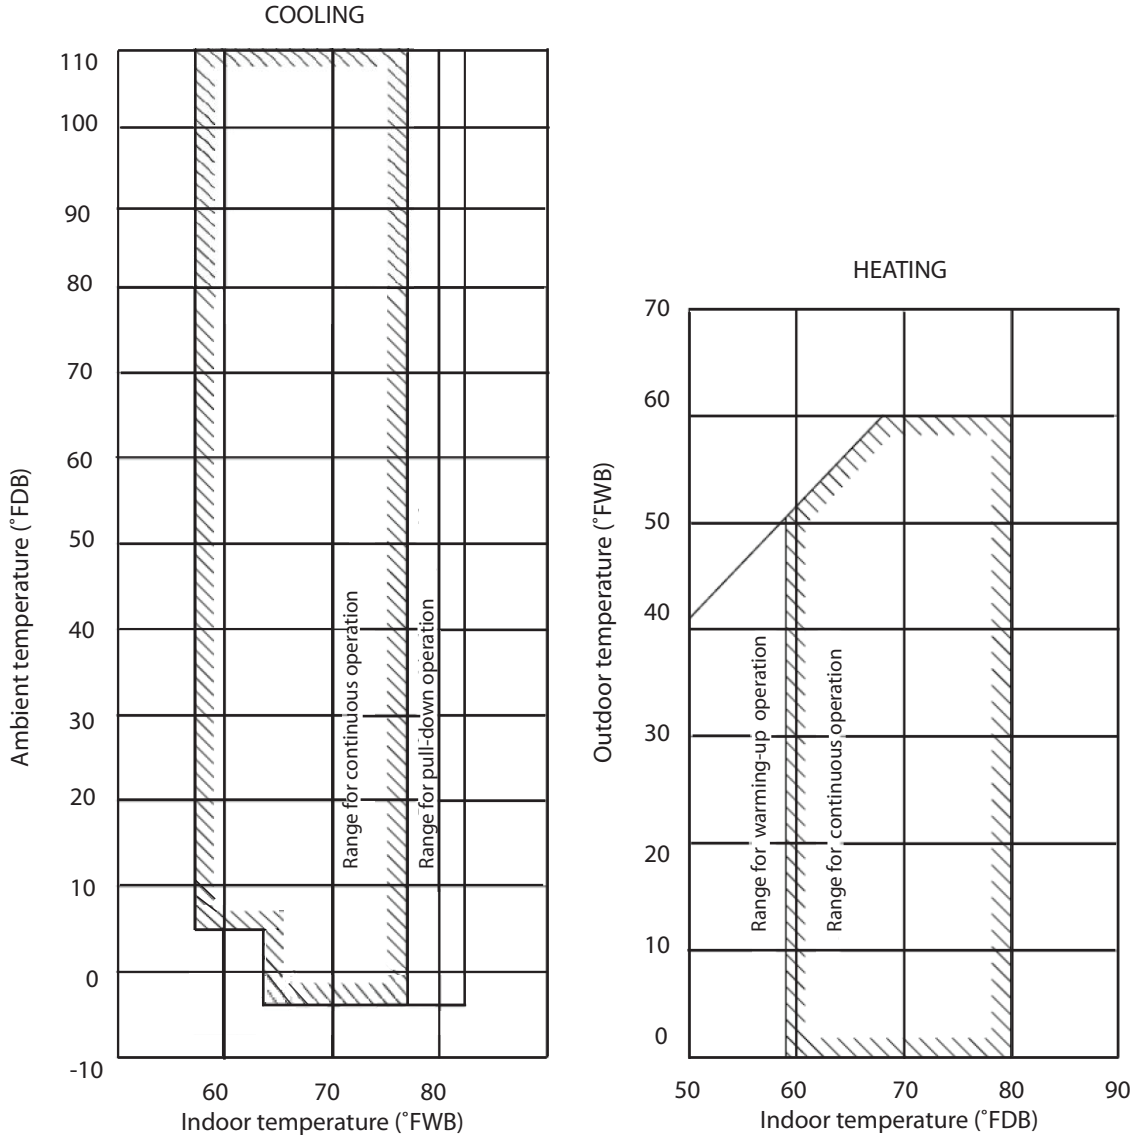






Application Rules:









- Indoor Units assigned for low ambient cooling CANNOT exceed 50% of the Nominal Rating of the Condensing Unit
- Total Connection index of each system is limited to 60 –130%
- Function is engaged by a field setting on the condensing unit (to enable Low Ambient Cooling) and a dip switch setting is necessary on the BSVQ units serving Indoor Units NOT subject to Low Ambient Cooling Requirements
- During operation below 23°F (-5°C), the available cooling capacity decreases as follows: -
 - 14°F (-10°C) - Reduces to 80% of Nominal
 - 5°F (-15°C) - Reduces to 65% of Nominal
 - 4°F (-20°C) - Reduces to 60% of Nominal
- During operation the operating Sound Level of the BSVQ unit can increase (Max + 3dB(A)) thus it is encouraged to locate units away from sound sensitive zones.
- The vertical separation of Outdoor to Indoor unit (when Outdoor below) is limited to 164ft (normal = 295ft)
- * **Contact your local Daikin representative for wind cover specification requirements.**









11. Accessories

Standard Accessories

REYQ72PTJU/ REYQ96PTJU / REYQ120PTJU / REYQ144PBTJ





Name	Clamp(1)	Clamp(2)	Vinyl tube	Conduit mounting plate		Manuals, etc.
Quantity	9 pcs.	3 pcs.	4 pcs.	2 pcs.	2 pcs.	1 pc. each
Shape						<ul style="list-style-type: none"> • Operation manual • Installation manual • “REQUEST FOR THE INDICATON” label (Installation records)



Name		Liquid side accessory pipe (1)	Liquid side accessory pipe (2)	Suction gas side accessory pipe (1)			Suction gas side accessory pipe (2)		
Quantity	72P type	1 pc.	1 pc.	1 pc.			1 pc.		
	96P type			1 pc.			1 pc.		
	120P/144P type			1 pc.	1 pc.	1 pc.	1 pc.		
Shape									
				φ7/8	φ7/8	φ1-1/8	φ3/4	φ7/8	φ1-1/8










Name		HP / LP gas side accessory pipe (1)		HP / LP gas side accessory pipe (2)			L type accessory joint (1)	L type accessory joint (2)	accessory joint (2)
Quantity	72P type	1 pc.		1 pc.			1 pc.	1 pc.	1 pc.
	96P type		1 pc.		1 pc.				
	120P/144P type		1 pc.		1 pc.				
Shape									
		φ5/8	φ3/4	φ7/8	φ5/8	φ3/4	φ7/8	φ1	φ3/4





3P215731-12R

REM72PBTJ / REM96PBTJ / REM120PBTJ

Name	Clamp(1)	Clamp(2)	Clamp(3)	Vinyl tube
Quantity	8 pcs.	2 pcs.	1 pc.	4 pcs.
Shape	 (Small)		 (Large)	

Name	Conduit mounting plate		Manuals, etc.
Quantity	2 pcs.	2 pcs.	1 pc. each
Shape			<ul style="list-style-type: none"> · Operation manual · Installation manual · “REQUEST FOR THE INDICATON” label (Installation records) · Add additional refrigerant charge label

Name	Liquid side accessory pipe (1)	Liquid side accessory pipe (2)	Suction gas side accessory pipe (1)	Suction gas side accessory pipe (2)	HP / LP gas side accessory pipe (1)	HP / LP gas side accessory pipe (2)			
Quantity	72 · 96P type 1 pc.	1 pc.	1 pc.	1 pc.	2 pcs.				
	120P type 1 pc.	1 pc.		1 pc.	1 pc.	2 pcs.			
Shape			 f7/8	 f1-1/8	 f7/8	 f1-1/8	 f3/4	 f7/8	 f7/8

Name	Equalizer side accessory pipe (1)	Equalizer side accessory pipe (2)	L type accessory joint (1)	L type accessory joint (2)
Quantity	72 · 96P type 1 pc.		1 pc.	2 pcs.
	120P type 1 pc.			
Shape		 f3/4	 f1	 f3/4

3P215731-11R

Optional Accessories (For Unit)

Series		VRV III				
Models		REYQ72PTJU	REYQ96PTJU REYQ120PTJU REYQ144PBTJ	REYQ168PBTJ	REYQ192PBTJ REYQ216PBTJ REYQ240PBTJ	REYQ264PBTJ REYQ288PBTJ REYQ312PBTJ REYQ336PBTJ
Optional accessories						
Distributive piping	Refnet header	Model	KHRP25M33H (Max. 8 branch)	KHRP25M33H (Max. 8 branch) KHRP25M72H (Max. 8 branch)	KHRP25M33H (Max. 8 branch) KHRP25M72H (Max. 8 branch) KHRP25M73HU (Max. 8 branch)	
		AS No.	—	—	—	
		Z No.	—	—	—	
	Refnet joint	Model	KHRP25A22T KHRP25A33T	KHRP25A22T KHRP25A33T KHRP25M72TU	KHRP25A22T KHRP25A33T KHRP25M72TU KHRP25M73TU	
		AS No.	—	AS3803118 (KHRP25M72TU)	AS3803566 (KHRP25M73TU)	
		Z No.	—	—	—	
Outdoor unit multi connection piping kit	Model	—		BHFP26P90U	BHFP26P136U	
	AS No.	—		—	—	
	Z No.	—		—	—	

C: 3D059681C

Warning



Daikin Industries, Ltd.'s products are manufactured for export to numerous countries throughout the world. Daikin Industries, Ltd. does not have control over which products are exported to and used in a particular country. Prior to purchase, please therefore confirm with your local authorized importer, distributor and/or retailer whether this product conforms to the applicable standards, and is suitable for use, in the region where the product will be used. This statement does not purport to exclude, restrict or modify the application of any local legislation.

Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire, or explosion.

Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire, or explosion.

Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any inquiries, please contact your local importer, distributor, or retailer.



©2010 Daikin Industries, Limited.

Daikin® AC Absolute Comfort®, and its design, VRV®, REFNET™, and Quaternity™ are registered trademarks of Daikin Industries, Limited. All rights reserved. LonWorks® and LON® are registered trademarks of Echelon Corporation. BACnet® is a Data Communication Protocol for Building Automation and Control Networks, developed under the auspices of the American Society of Heating, Refrigeration, and Air-Conditioning Engineers (ASHRAE).



JMI-0107



JQA-1452

About ISO 9001

ISO 9001 is a plant certification system defined by the International Organization for Standardization (ISO) relating to quality assurance. ISO 9001 certification covers quality assurance aspects related to the "design, development, manufacture, installation, and supplementary service" of products manufactured at the plant.



EC99J2044

About ISO 14001

ISO 14001 is the standard defined by the International Organization for Standardization (ISO) relating to environmental management systems. Our group has been acknowledged by an internationally accredited program of environmental protection procedures and activities to meet the requirements of ISO 14001.

Dealer

DAIKIN AC (AMERICAS), INC.
1645 Wallace Drive, Suite 110
Carrollton, TX 75006
info@daikinac.com
www.daikinac.com

©All rights reserved

•Specifications, designs and other content appearing in this brochure are current as of March 2011 but subject to change without notice.