

# Submittal Data Sheet

absolute comfort

Project Name:
Location:
Engineer:
Submitted to:
Submitted by:
Reference:

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

### **Performance**

Indoor Unit Model No:	FXAQ09MVJU
Cooling Capacity (Btu/hr):	9500
Sensible Capacity (Btu/hr):	7300
Cooling Input Power (kW):	0.022
Heating Capacity (Btu/hr):	10500
Heating Input Power (kW):	0.027
Nominal Ext Static Pressure (inH2O):	0
Max Ext Static Pressure (inH2O):	0

Indoor Unit Type:	Wall Mounted
Cooling Naminal Conditions	Indoor: 80°F DB/67°F WB
Cooling Nominal Conditions	Outdoor: 95°F DB/75°F WB
	Indoor: 70°F DB/60°F WB
Heating Nominal Conditions	Outdoor: 47°F DB/43°F WB
Nominal Piping Length	25
Nominal Height Separation	0

### Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	0.3
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	11-3/8x31-1/4x9
Panel (HxWxD):	N/A
Net Weight (lbs):	25
Weight with Panel (lbs):	

Airflow Rate (CFM wet coil)	280//175
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	1/2
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	11/16
Sound Pressure Level (dBA):	37
Sound Power Level (dBA):	

### Appearance - Indoor Unit






## **Submittal Data Sheet**

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

### **Dimensional Drawing - Indoor Unit**

Daikin AC TRL Generated Submittal Data

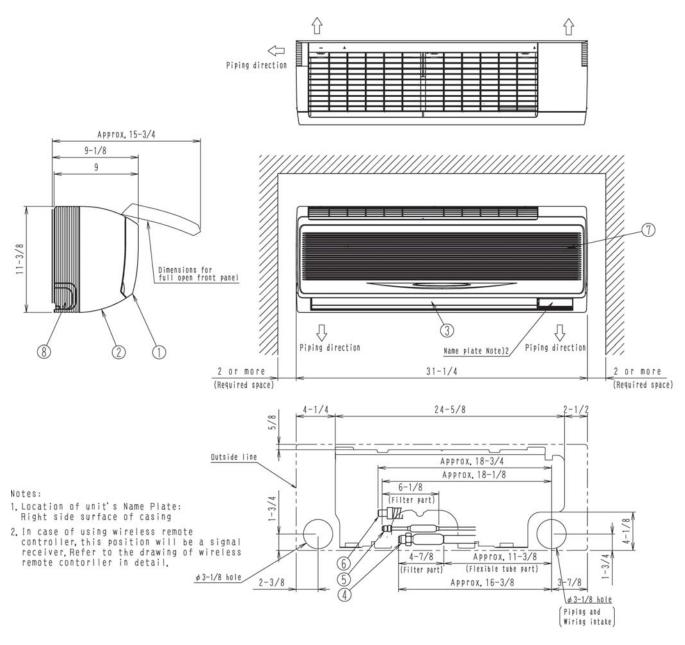

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006



# **Submittal Data Sheet**

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

#### <u>Notes</u>

Daikin AC TRL Generated Submittal Data

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006