

Project Name:	
•	
Location:	A
Engineer:	
Submitted to:	Ō
Submitted by:	ī
Reference:	

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Performance

Indoor Unit Model No:	FXFQ09PVJU
Cooling Capacity (Btu/hr):	9500
Sensible Capacity (Btu/hr):	9500
Cooling Input Power (kW):	0.034
Heating Capacity (Btu/hr):	10500
Heating Input Power (kW):	0.03
Nominal Ext Static Pressure (inH2O):	0
Max Ext Static Pressure (inH2O):	0

Indoor Unit Type:	Round Flow Cassette
Cooling Nominal Conditions	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB
Heating Nominal Conditions	Indoor: 70°F DB
	Outdoor: 47°F DB/43°F WB
Nominal Piping Length	25
Nominal Height Separation	0

Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	0.3
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	9-11/16x33-1/16x33-1/16
Panel (HxWxD):	2x37-3/8x37-3/8
Net Weight (lbs):	43
Weight with Panel (lbs):	55.2

460/390/350
1/2
1/4
1-1/4
30

Appearance - Indoor Unit






Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Dimensional Drawing - Indoor Unit

Daikin AC TRL Generated Submittal Data

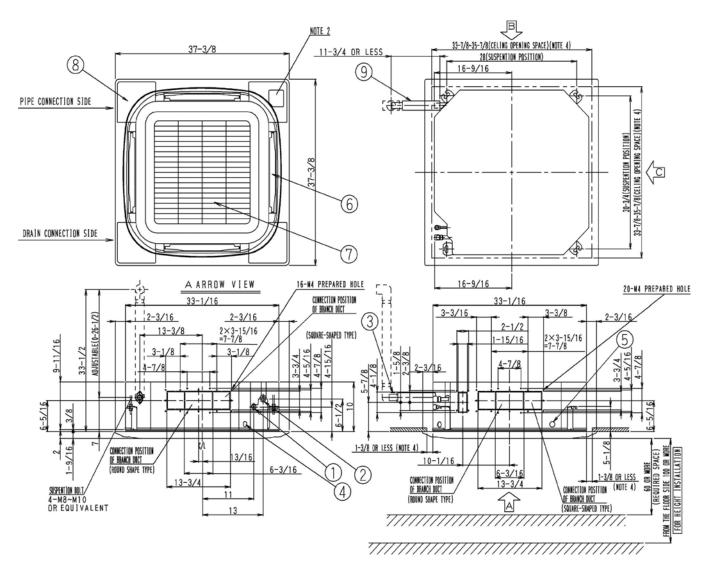



Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

<u>Notes</u>

Daikin AC TRL Generated Submittal Data

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006