

Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Performance

Sensible Capacity (Btu/hr):10Cooling Input Power (kW):0Heating Capacity (Btu/hr):13	VJU
Cooling Input Power (kW): 0 Heating Capacity (Btu/hr): 13 Heating Input Power (kW): Nominal Ext Static Pressure (inH2O):	2000
Heating Capacity (Btu/hr): 13 Heating Input Power (kW): Nominal Ext Static Pressure (inH2O):	0300
Heating Input Power (kW): Nominal Ext Static Pressure (inH2O):	0.034
Nominal Ext Static Pressure (inH2O):	3500
	0.03
May Ext Static Proscure (in H2O):	0
iviax Ext Static Flessure (IIITZO).	0

Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	0.3
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	9-11/16x33-1/16x33-1/16
Panel (HxWxD):	2x37-3/8x37-3/8
Net Weight (lbs):	43
Weight with Panel (lbs):	55.2

Indoor Unit Type:	Round Flow Cassette
Cooling Nominal Conditions	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB
Heating Naminal Conditions	Indoor: 70°F DB
Heating Nominal Conditions	Outdoor: 47°F DB/43°F WB
Nominal Piping Length	25
Nominal Height Separation	0

Airflow Rate (CFM wet coil)	460/390/350
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	1/2
Liquid Pipe Connection (inch):	1/4
Condensate Connection (inch):	1-1/4
Sound Pressure Level (dBA):	30
Sound Power Level (dBA):	

Appearance - Indoor Unit






Submittal Data Sheet

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

Dimensional Drawing - Indoor Unit

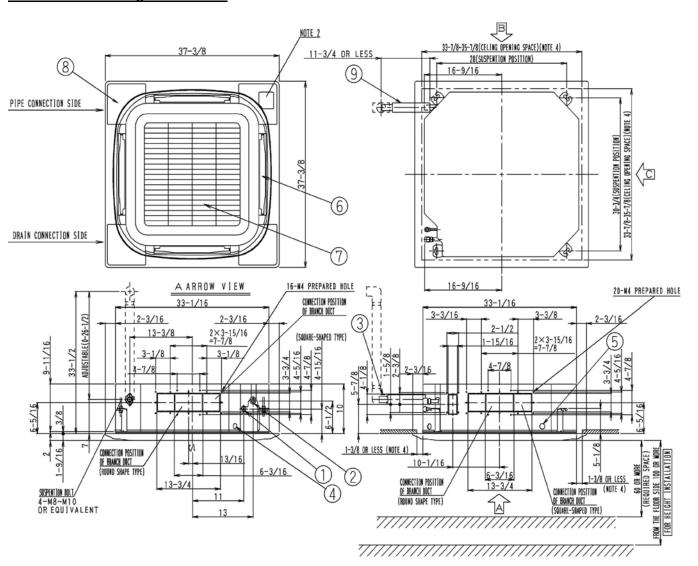



Submittal Data Sheet

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
	Date: Construction: Unit #:

Notes

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor