

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	

Approval:	
Date:	
Construction:	
Jnit #:	
Drawing #:	

Performance

Indoor Unit Model No:	FXMQ18PVJU
Cooling Capacity (Btu/hr):	18000
Sensible Capacity (Btu/hr):	15695
Cooling Input Power (kW):	0.214
Heating Capacity (Btu/hr):	20000
Heating Input Power (kW):	0.203
Nominal Ext Static Pressure (inH2O):	0.2
Max Ext Static Pressure (inH2O):	0.8

(DC)
F WB
F WB
F WB
F WB
25
0

|--|

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	1.6
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	11-13/16x39-3/8x27-9/16
Panel (HxWxD):	N/A
Net Weight (lbs):	80
Weight with Panel (lbs):	

636//530
1/2
1/4
1-1/4
41

Appearance - Indoor Unit






Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Dimensional Drawing - Indoor Unit

Daikin AC TRL Generated Submittal Data

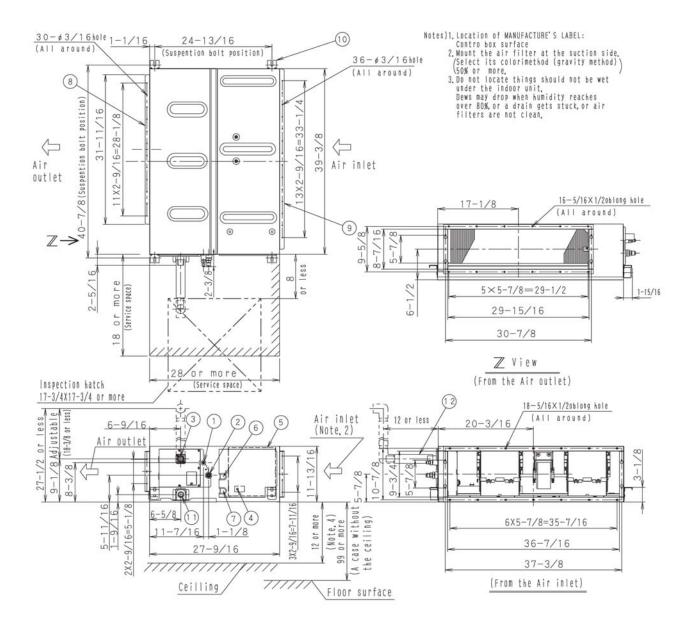

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006



Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

<u>Notes</u>

Daikin AC TRL Generated Submittal Data

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006