

pproval:	
ate:	
onstruction:	_
nit #:	
rawing #:	

### **Performance**

Indoor Unit Model No:	FXMQ24PVJU
Cooling Capacity (Btu/hr):	24000
Sensible Capacity (Btu/hr):	18766
Cooling Input Power (kW):	0.229
Heating Capacity (Btu/hr):	27000
Heating Input Power (kW):	0.218
Nominal Ext Static Pressure (inH2O):	0.2
Max Ext Static Pressure (inH2O):	0.8

Indoor Unit Type:	Duct N	Mounted Standard Static (DC)
Cooling Naminal Cons	litiono	Indoor: 80°F DB/67°F WB
Cooling Nominal Cond	mons	Outdoor: 95°F DB/75°F WB
Heating Naminal Can	litiono	Indoor: 70°F DB/60°F WB
Heating Nominal Cond	IIIIONS	Outdoor: 47°F DB/43°F WB
Nominal Piping Length	1	25
Nominal Height Separ	ation	0

### Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	1.8
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	11-13/16x39-3/8x27-9/16
Panel (HxWxD):	N/A
Net Weight (lbs):	80
Weight with Panel (lbs):	

Airflow Rate (CFM wet coil)	688//565
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	5/8
Liquid Pipe Connection (inch):	3/8
Condensate Connection (inch):	1-1/4
Sound Pressure Level (dBA):	42
Sound Power Level (dBA):	

### Appearance - Indoor Unit






## **Submittal Data Sheet**

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

### **Dimensional Drawing - Indoor Unit**

Daikin AC TRL Generated Submittal Data

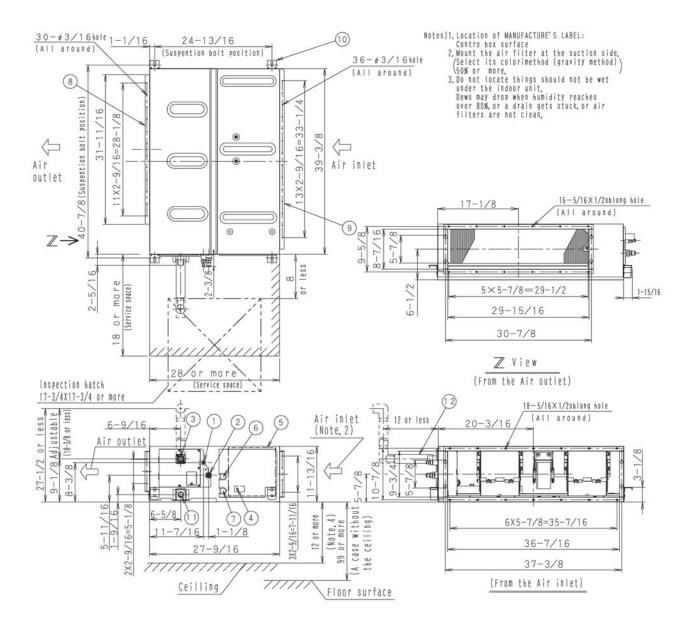

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006



# **Submittal Data Sheet**

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

#### <u>Notes</u>

Daikin AC TRL Generated Submittal Data

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006