

Submittal Data Sheet

absolute comfort

Project Name:	
Location:	A
Engineer:	Ē
Submitted to:	Ō
Submitted by:	Ī
Reference:	

Approval:	
Date:	
Construction:	
Jnit #:	_
Drawing #:	_

Performance

Indoor Unit Model No:	FXMQ36MVJU
Cooling Capacity (Btu/hr):	36000
Sensible Capacity (Btu/hr):	26300
Cooling Input Power (kW):	0.467
Heating Capacity (Btu/hr):	40000
Heating Input Power (kW):	0.467
Nominal Ext Static Pressure (inH2O):	0.43
Max Ext Static Pressure (inH2O):	0.71

Indoor Unit Type:	Duct Mounted Medium Static
Cooling Naminal Conditions	Indoor: 80°F DB/67°F WB
Cooling Nominal Conditions	Outdoor: 95°F DB/75°F WB
	Indoor: 70°F DB/60°F WB
Heating Nominal Conditions	Outdoor: 47°F DB/43°F WB
Nominal Piping Length	25
Nominal Height Separation	0

Indoor	Unit	Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	2.9
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	15-3/8x43-3/4x27-1/8
Panel (HxWxD):	N/A
Net Weight (lbs):	139
Weight with Panel (lbs):	

Airflow Rate (CFM wet coil)	1020//810
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	5/8
Liquid Pipe Connection (inch):	3/8
Condensate Connection (inch):	1-1/14
Sound Pressure Level (dBA):	45
Sound Power Level (dBA):	

Appearance - Indoor Unit






Submittal Data Sheet

Project Name:
ocation:
Engineer:
Submitted to:
Submitted by:
Reference:

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	

Dimensional Drawing - Indoor Unit

Daikin AC TRL Generated Submittal Data

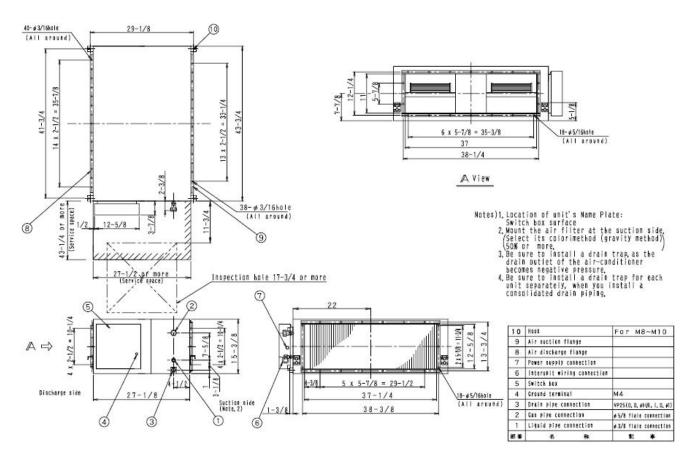

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006



Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

<u>Notes</u>

Daikin AC TRL Generated Submittal Data

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor

Daikin AC (Americas), Inc., 1645 Wallace Drive - Suite 110, Carrollton, TX 75006