

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	
Relefence.	

pproval:
Pate:
Construction:
Init #:
Prawing #:

Performance

FXTQ30PAVJU
30000
19170
0.248
34000
0.248
0.3
0.5

Indoor Unit Type:	Vertical A	ir Handler (and Horizontal R)
Cooling Naminal Co	nditiono	Indoor: 80°F DB/67°F WB
Cooling Nominal Condition		Outdoor: 95°F DB/75°F WB
Heating Nominal Conditions		Indoor: 70°F DB/60°F WB
nealing Nominal Co	onaitions	Outdoor: 47°F DB/43°F WB
Nominal Piping Len	gth	25
Nominal Height Sep	paration	0

Indoor Unit Details

Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	2.4
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	53-1/4x22x24
Panel (HxWxD):	N/A
Net Weight (lbs):	145
Weight with Panel (lbs):	

1000//700	
5/8	
3/8	
3/4 FPT	

Appearance - Indoor Unit







Submittal Data Sheet

Project Name:	
Location:	
Engineer:	
Submitted to:	
Submitted by:	
Reference:	

Approval:
Date:
Construction:
Unit #:
Drawing #:

Dimensional Drawing - Indoor Unit

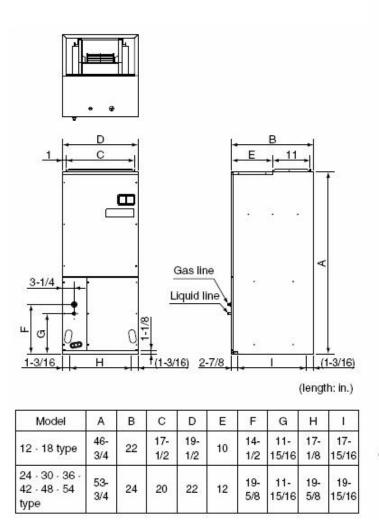

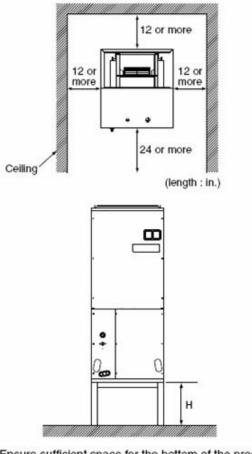

 Ensure sufficient space for the bottom of the product (H dimensions) so that a downward slope of 1/100 can be maintained for drain piping, as described for the intake duct installation and in "6. DRAIN PIPING WORK".



Submittal Data Sheet

Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Notes

Requires KRCS01-4B (or BRC1E71), Limited to 100% connection index on VRVIII-S, VRV-WIII and VRV-III-C, Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor