

Job Name: _____

Location: _____

Purchaser: _____

Engineer: _____

Submitted To: _____

For: Reference Approval Construction

Submitted By: _____

Date: _____

Unit Designation: _____

Capacities:

Heating Capacity	38,200 Btu/h
Heating Input Power	2.58 kW
Cooling Capacity	47,600 Btu/h
Cooling Input Power	3.91 kW
COP	4.3
EER	12.2

Measuring conditions: Heating Ta DB/WB 44.6°F/42.8°F(7/6°C); LWC 95°F (35°C); (DT=9°F(5°C)
Cooling Ta 95°F(35°C); LWE 64.4°F (18°C); (DT=9°F(5°C))

Operating Range:

Cooling Temp. (Min/Max)	50/114.8°F (10/46°C)
Heating Temp. (Min/Max)	-4/95°F (-20/35°C)
Domestic Hot Water Temp. (Min/Max)	*-4/109.4°F (-20/43°C)

*Booster heater operation from 95°F (35°C) onwards

Sound Pressure Level:

Heating	49 (dBA)
Cooling	50 (dBA)

Fan:

Fan Type x Quantity	Propeller Fan x 2
Drive	Brushless DC motor
Output	70 W

Power Supply:

V/PH/Hz	208-230/1/60
Minimum Circuit Amps (MCA)	26.5 Amps
Maximum Overcurrent Protection (MOP)	30 Amps

Refrigerant & Piping:

Refrigerant Type/Charge	R-410A/8.15 lbs
Liquid Piping (OD)	3/8" (Flare)
Suction Gas Piping (OD)	5/8" (Flare)
Max Pipe Length (total)	246 ft
Chargeless	98.4 ft
Vertical limit	98.4 ft

Additional charging of refrigerant

98.4 ~ 131.2 ft (1.10 lbs)	131.23 ~ 164.04 ft (2.20 lbs)
164.04 ~ 196.85 ft (3.31 lbs)	196.85 ~ 246.06 ft (4.41 lbs)

Unit Data:



Dimensions (HxWxD)	46-1/16 x 35-7/16 x 12-5/8
Weight	227 lbs

Standard Features:

Compressor warranty from date of installation	7 years
Parts warranty	5 years
Limited labor warranty	1 year



R-410A

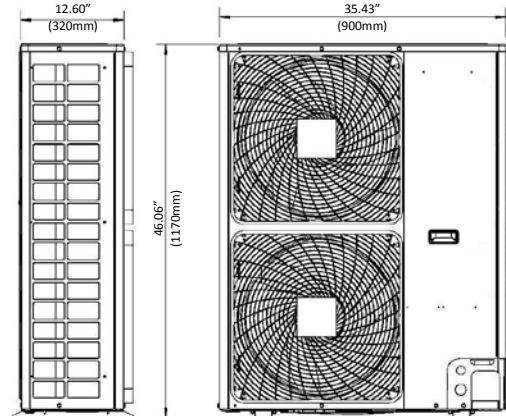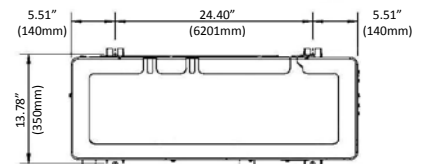

For further information about the installation, please refer to the Installation and Engineering Guides

