


Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	
	Diawing #:	
Performance		
Indoor Unit Model No: FHQ42MVJU	Indoor Unit Type:	Ceiling Suspended
Outdoor Unit Model No: RZR42PVJU	Condensing Unit Type:	SkyAir Cool Only
Rated Cooling Capacity (Btu/hr): 40500		Indoor: 80°F DB/67°F WB
Sensible Capacity (Btu/hr): 27900	Rated Cooling	utdoor: 95°F DB/75°F WB
Max/Min Cooling Capacity (Btu/hr / kW): atabook/databook	Conditions	
Cooling Input Power (kW): 4.465		Indoor: N/A
SEER: 13.8	Rated Heating	Outdoor: N/A
Rated Heating Capacity (Btu/hr): N/A	Conditions	
Max/Min Heating Capacity (Btu/hr / kW): atabook/databook	Rated Piping Length(ft)	25
Heating Input Power (kW): N/A	Rated Height Separation(ft)	0
Heating COP (Btu/hr / Btu/hr): N/A		
HSPF: N/A		
TOTT.		
Indoor Unit Details		
Power Supply (V/Hz/Ph:) 208-230/60/1ph	Airflow Rate (CFM wet coil)	850//700
Power Supply Connections: L1, L2, Ground	Moisture Removal (pt/h):	
Min Circuit Amps MCA (A): 1.4	Gas Pipe Connection (inch):	5/8
Max Overcurrent Amps MFA (A): 15	Liquid Pipe Connection (inch):	3/8
Dimensions (HxWxD): 7-11/16x62-5/8x26-3/4	Condensate Connection (inch):	1
Panel (HxWxD): N/A	Sound Pressure Level (dBA):	47
Net Weight (lbs): 90	Sound Power Level (dBA):	
Weight with Panel (lbs):	Static Pressure Rated/Max (inWg	g) 0 / 0/0
Condensing Unit Details		
Power Supply (V/Hz/Ph): 208-230/60/1ph	Compressor Type:	Inverter
Power Supply Connections: L1, L2, Ground	Capacity Control Range (%):	25 - 100
Min. Circuit Amps MCA (A): 27	Airflow Rate (CFM):	3740
Max. Overcurrent Amps MFA (A): 30	Gas Pipe Connection (inch):	5/8
Max. Starting Current MSC(A):	Liquid Pipe Connection (inch):	3/8
	Sound Pressure Level (dBA):	58
	Sound Power Level (dBA):	
Dimensions (HxWxD): 52-15/16x35-7/16x12-5/8 Net Weight (lbs): 283	Souria Fower Lever (ubA).	
System Details		
Refrigerant Type: R-410A	Max. Pipe Length (Vertical ft):	164 ft
Holding Refrigerant Charge (lbs): 8.8	Cooling Operation Range (°F):	23 - 115
Additional Charge (oz/ft): 0.036lbs/ft	Cooling Range w/Baffle (°F):	0 - 115
Pre-charge Piping (Length ft):	Heating Operation Range (℉):	N/A
Max. Pipe Length (Total ft): 230 ft	Heating Range w/Baffle (°F):	N/A



Project Name:	
Location:	Approval:
Engineer:	Date:
Submitted to:	Construction:
Submitted by:	Unit #:
Reference:	Drawing #:

Dimensional Drawing - Indoor Unit

FHQ42MVJU

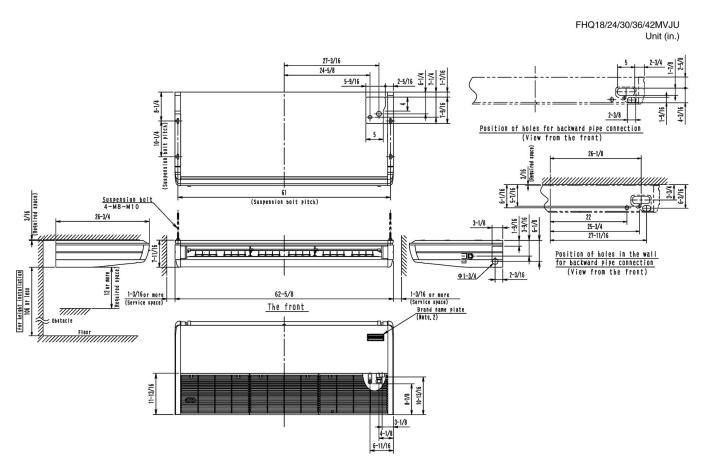




Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

Dimensional Drawing - Condensing Unit

RZR42PVJU

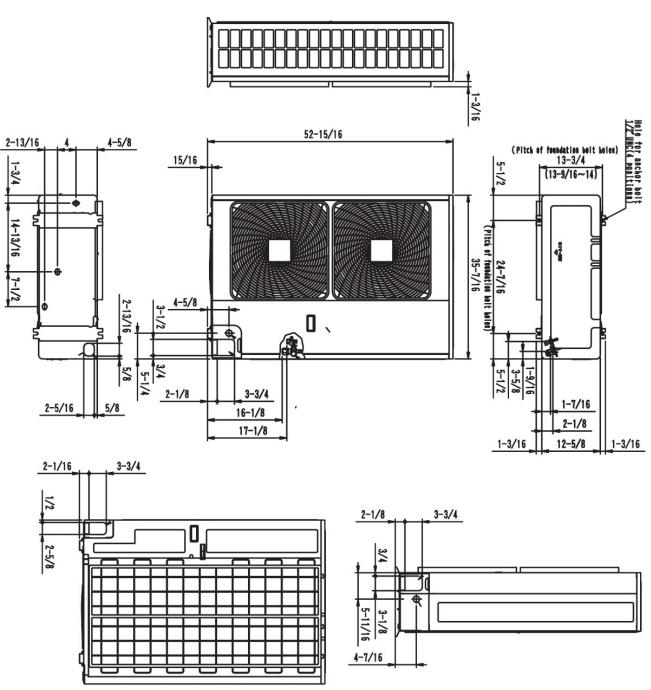




Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	



FHQ42MVJU Std U.S. Warranty: 7yrs Compressor, 5yrs Parts

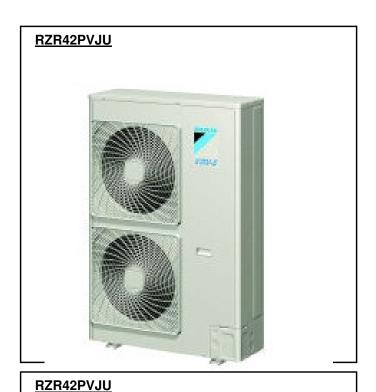

Std U.S. Warranty: 7yrs Compressor, 5yrs Parts