



EDUS 39-801A-R2

R-410A

Engineering Data

VRV[®] III

REYQ_PYDN

3 phase

460V, 60Hz

DAIKIN AC (AMERICAS), INC.

REYQ-P Heat Recovery (460V)

1. Specifications	2
2. Dimensions	5
3. Service Space	8
4. Piping Diagrams.....	9
5. Wiring Diagrams.....	12
6. Field Wiring	15
7. Electric Characteristics.....	17
8. Capacity Table (Reference Data).....	19
8.1 Cooling Capacity (REYQ-PYDN)	19
8.2 Heating Capacity (REYQ-PYDN)	27
8.3 Capacity Correction Factor.....	43
9. Operation Limits	51
10. Sound Levels	52
11. Accessories	53

1. Specifications

Model Name		REYQ72PYDN	REYQ96PYDN	REYQ120PYDN
Power Supply		3 Phase 60Hz 460V	3 Phase 60Hz 460V	3 Phase 60Hz 460V
★1 Cooling Capacity	Btu / h	72,000	96,000	120,000
★2 Heating Capacity	Btu / h	81,000	108,000	135,000
Casing Color		Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)	Ivory White (5Y7.5/1)
Dimensions: (HxWxD)	in (mm)	66-1/8 x 51-3/16 x 30-1/8" (1680 x 1300.2 x 765 mm)	66-1/8 x 51-3/16 x 30-1/8" (1680 x 1300.2 x 765 mm)	66-1/8 x 51-3/16 x 30-1/8" (1680 x 1300.2 x 765 mm)
Heat Exchanger		Cross Fin Coil	Cross Fin Coil	Cross Fin Coil
Comp.	Type	Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type	Hermetically Sealed Scroll Type
	Piston Displacement	m ³ /h	7.88+10.53	13.34+10.53
	Number of Revolutions	r.p.m	3720, 2900	6300, 2900
	Motor Output×Number of Units	kW	(1.0+4.5) × 1	(2.2+4.5) × 1
Starting Method		Soft Start	Soft Start	Soft Start
Fan	Type	Propeller Fan	Propeller Fan	Propeller Fan
	Motor Output	kW	(0.35) × 2	(0.35) × 2
	Air Flow Rate	cfm	6,700	7,410
	Drive		Direct Drive	Direct Drive
Connecting Pipes	Liquid Pipe	in (mm)	φ 3/8" (9.5 mm) C1220T (Brazing Connection)	φ 1/2" (12.7 mm) C1220T (Brazing Connection)
	Suction Gas Pipe	in (mm)	φ 3/4" (19.1 mm) C1220T (Brazing Connection)	φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)
	High and Low Pressure Gas Pipe	in (mm)	φ 5/8" (15.8 mm) C1220T (Brazing Connection)	φ 3/4" (19.1 mm) C1220T (Brazing Connection)
Mass	Lbs (kg)	732 (332 kg)	732 (332 kg)	732 (332 kg)
★3 Sound Level (Reference Value)	dBA	58	58	60
Safety Devices		High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector	High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector
Defrost Method		Deicer	Deicer	Deicer
Capacity Control	%	20-100	14-100	14-100
Refrigerant	Refrigerant Name		R-410A	R-410A
	Charge	Lbs	22.7	23.4
	Control		Electronic Expansion Valve	Electronic Expansion Valve
Standard Accessories		Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps	Installation Manual, Operation Manual, Connection Pipes, Clamps
Drawing No.		4D058602A	4D058603A	4D058604A

Notes:

- ★1 Indoor temp. : 80°FDB or 67°FWB / outdoor temp. : 95°FDB / Equivalent piping length : 25 ft (7.5 m), level difference: 0 ft.
- ★2 Indoor temp. : 70°FDB / outdoor temp. : 47°FDB or 43°FWB / Equivalent piping length : 25 ft (7.5 m), level difference: 0 ft.
- ★3 Anechoic chamber conversion value, measured under JISB8616 conditions. During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Model Name (Combination Unit)		REYQ144PYDN		REYQ168PYDN		REYQ192PYDN		
Model Name (Independent Unit)		REM72PYDN REM72PYDN		REM72PYDN REM96PYDN		REM72PYDN REM120PYDN		
Power Supply		3 Phase 60Hz 460V		3 Phase 60Hz 460V		3 Phase 60Hz 460V		
★1 Cooling Capacity	Btu / h	144,000		168,000		192,000		
★2 Heating Capacity	Btu / h	162,000		189,000		216,000		
Casing Color		Ivory White (5Y7.5/1)		Ivory White (5Y7.5/1)		Ivory White (5Y7.5/1)		
Dimensions: (HxWxD)	in (mm)	66-1/8 × 36-5/8 × 30-1/8" (1680 x 930 x 765 mm) + 66-1/8 × 36-5/8 × 30-1/8" (1680 x 930 x 765 mm)		66-1/8 × 36-5/8 × 30-1/8" (1680 x 930 x 765 mm) + 66-1/8 × 36-5/8 × 30-1/8" (1680 x 930 x 765 mm)		66-1/8 × 36-5/8 × 30-1/8" (1680 x 930 x 765 mm) + 66-1/8 × 36-5/8 × 30-1/8" (1680 x 930 x 765 mm)		
Heat Exchanger		Cross Fin Coil		Cross Fin Coil		Cross Fin Coil		
Comp.	Type	Hermetically Sealed Scroll Type		Hermetically Sealed Scroll Type		Hermetically Sealed Scroll Type		
	Piston Displacement	m ³ /h	(16.90) × 2		16.90 + (10.53+13.34)		16.90 + (10.53+13.34)	
	Number of Revolutions	r.p.m	(7980) × 2		7980, (2900, 6300)		7980, (2900, 6300)	
	Motor Output×Number of Units	kW	(4.7) × 2		(4.7) × 1 + (2.2+4.5) × 1		(4.7) × 1 + (3.5+4.5) × 1	
	Starting Method		Soft Start		Soft Start		Soft Start	
Fan	Type	Propellor Fan		Propellor Fan		Propellor Fan		
	Motor Output	kW	(0.75) × 1 + (0.75) × 1		(0.75) × 1 + (0.75) × 1		(0.75) × 1 + (0.75) × 1	
	Air Flow Rate	cfm	6,350+6,350		6,350+6,530		6,350+7,060	
	Drive		Direct Drive		Direct Drive		Direct Drive	
Connecting Pipes	Liquid Pipe ★3	in (mm)	φ1/2" (12.7 mm) C1220T (Brazing Connection)		φ5/8" (15.8 mm) C1220T (Brazing Connection)		φ5/8" (15.8 mm) C1220T (Brazing Connection)	
	Suction Gas Pipe ★3	in (mm)	φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)		φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)		φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)	
	High and Low Pressure Gas Pipe ★3	in (mm)	φ 7/8" (22.2 mm) C1220T (Brazing Connection)		φ 7/8" (22.2 mm) C1220T (Brazing Connection)		φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)	
	Pressure Equalizer tube	in (mm)	φ 3/4" (19.1 mm) C1220T (Brazing Connection)		φ 3/4" (19.1 mm) C1220T (Brazing Connection)		φ 3/4" (19.1 mm) C1220T (Brazing Connection)	
Mass	Lbs (kg)	463+463 lbs (210 + 210 kg)		463+573 lbs (210 + 259.9 kg)		463+573 lbs (210 + 259.9 kg)		
Safety Devices		High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector		High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector		High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector		
Defrost Method		Deicer		Deicer		Deicer		
Capacity Control	%	13~100		9~100		7~100		
Refrigerant	Refrigerant Name	R-410A		R-410A		R-410A		
	Charge	Lbs	18.1+18.1		18.1+19.8		18.1+20.1	
	Control		Electronic Expansion Valve		Electronic Expansion Valve		Electronic Expansion Valve	
Standard Accessories		Installation Manual, Operation Manual, Connection Pipes, Clamps		Installation Manual, Operation Manual, Connection Pipes, Clamps		Installation Manual, Operation Manual, Connection Pipes, Clamps		
Drawing No.		4D059666A		4D059667A		4D059668A		

Notes:

- ★1 Indoor temp. : 80°FDB or 67°FWB / outdoor temp. : 95°FDB / Equivalent piping length : 25 ft (7.5 m), level difference: 0 ft.
- ★2 Indoor temp. : 70°FDB / outdoor temp. : 47°FDB or 43°FWB / Equivalent piping length : 25 ft (7.5 m), level difference: 0 ft.
- ★3 BHFP26P90U is necessary for the connection.

Concerning about the piping connection for each outdoor unit to the main line as shown above, use REFNET.

Model Name (Combination Unit)		REYQ216PYDN		REYQ240PYDN		
Model Name (Independent Unit)		REMQ96PYDN REMQ120PYDN		REMQ120PYDN REMQ120PYDN		
Power Supply		3 Phase 60Hz 460V		3 Phase 60Hz 460V		
★1 Cooling Capacity	Btu / h	216,000		240,000		
★2 Heating Capacity	Btu / h	243,000		270,000		
Casing Color		Ivory White (5Y7.5/1)		Ivory White (5Y7.5/1)		
Dimensions: (H×W×D)	in (mm)	66-1/8 × 36-5/8 × 30-1/8" (1680 × 930 × 765 mm) + 66-1/8 × 36-5/8 × 30-1/8" (1680 × 930 × 765 mm)		66-1/8 × 36-5/8 × 30-1/8" (1680 × 930 × 765 mm) + 66-1/8 × 36-5/8 × 30-1/8" (1680 × 930 × 765 mm)		
Heat Exchanger		Cross Fin Coil		Cross Fin Coil		
Comp.	Type	Hermetically Sealed Scroll Type		Hermetically Sealed Scroll Type		
	Piston Displacement	m ³ /h	(10.53+13.34) × 2		(10.53+13.34) × 2	
	Number of Revolutions	r.p.m	(2900, 6300) × 2		(2900, 6300) × 2	
	Motor Output×Number of Units	kW	(2.2+4.5) × 1 + (3.5+4.5) × 1		(3.5+4.5) × 2	
Starting Method		Soft Start		Soft Start		
Fan	Type	Propellor Fan		Propellor Fan		
	Motor Output	kW	(0.75) × 1 + (0.75) × 1		(0.75) × 1 + (0.75) × 1	
	Air Flow Rate	cfm	6,530+7,060		7,060+7,060	
	Drive		Direct Drive		Direct Drive	
Connecting Pipes	Liquid Pipe ★3	in (mm)	φ5/8" (15.8 mm) C1220T (Brazing Connection)		φ5/8" (15.8 mm) C1220T (Brazing Connection)	
	Suction Gas Pipe ★3	in (mm)	φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)		φ 1-3/8" (34.9 mm) C1220T (Brazing Connection)	
	High and Low Pressure Gas Pipe ★3	in (mm)	φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)		φ 1-1/8" (28.6 mm) C1220T (Brazing Connection)	
	Pressure Equalizer Tube	in (mm)	φ 3/4" (19.1 mm) C1220T (Brazing Connection)		φ 3/4" (19.1 mm) C1220T (Brazing Connection)	
Mass	Lbs (kg)	573 lbs (259.9 kg) +573 lbs (259.9 kg)		573 lbs (259.9 kg) +573 lbs (259.9 kg)		
Safety Devices		High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector		High Pressure Switch, Fan Driver Overload Protector, Overcurrent Relay, Inverter Overload Protector		
Defrost Method		Deicer		Deicer		
Capacity Control	%	7-100		6-100		
Refrigerant	Refrigerant Name		R-410A		R-410A	
	Charge	Lbs	19.8+20.1		20.1+20.1	
	Control		Electronic Expansion Valve		Electronic Expansion Valve	
Standard Accessories		Installation Manual, Operation Manual, Connection Pipes, Clamps		Installation Manual, Operation Manual, Connection Pipes, Clamps		
Drawing No.		4D059669A		4D059670A		

Notes:

- ★1 Indoor temp. : 80°FDB or 67°FWB / outdoor temp. : 95°FDB / Equivalent piping length : 25 ft (7.5 m), level difference: 0 ft.
- ★2 Indoor temp. : 70°FDB / outdoor temp. : 47°FDB or 43°FWB / Equivalent piping length : 25 ft (7.5 m), level difference: 0 ft.
- ★3 BHFP26P90U is necessary for the connection.
Concerning about the piping connection for each outdoor unit to the main line as shown above, use REFNET.

2. Dimensions

REYQ72, 96, 120PYDN

Notes)

1. For piping connection method (front and bottom sides), see the installation manual.

2. High and low pressure gas pipe

φ 5/8 Brazing connection...REYQ72P

φ 3/4 Brazing connection...REYQ96, 120P

φ 7/8 Brazing connection...REYQ144PT

Gas pipe

φ 1-1/8 Brazing connection...RXYQ144PT

Suction gas pipe

φ 3/4 Brazing connection...REYQ72P

φ 7/8 Brazing connection...REYQ96P


φ 1-1/8 Brazing connection...REYQ120, 144PT

Liquid pipe


φ 3/8 Brazing connection...REYQ72, 96P

φ 1/2 Brazing connection...REYQ120, 144PT, RXYQ144PT *2-13/16



3. *shows the dimensions after fixing the accessory pipes.

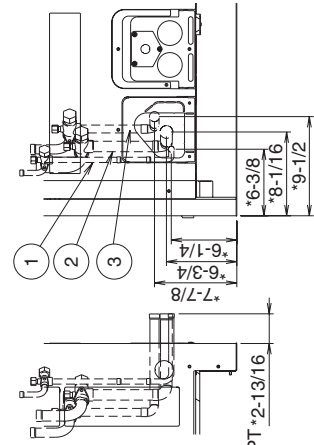

[DETAIL FOR FRONT SIDE]

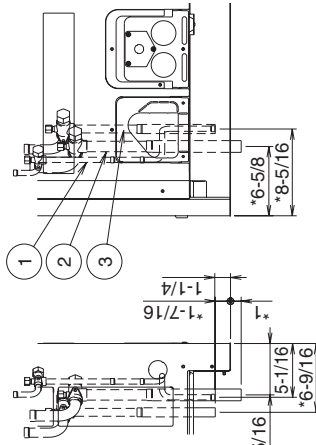




[DETAIL FOR BOTTOM SIDE]

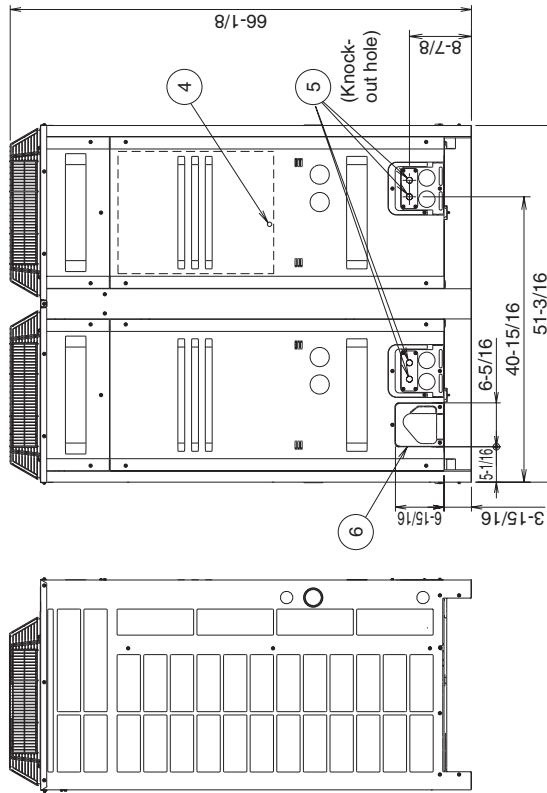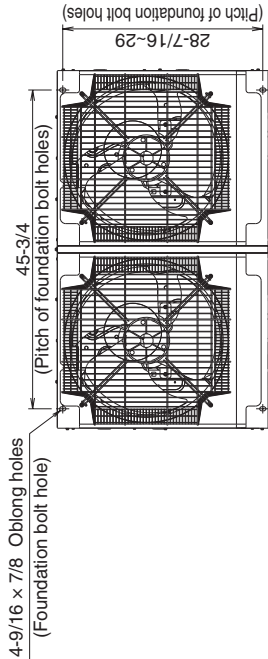

7	Pipe routing hole (bottom)	See note 1.
6	Pipe routing hole (front)	See note 1.
5	Power cord routing hole (front)	φ 7/8
4	Grounding terminal	Inside of el. compo. box (M8)
3	Gas pipe connection port (Only for RXYQ144P)	See note 2.
3	High and low pressure gas pipe connection port	See note 2.
2	Suction gas pipe connection port	See note 2.
1	Liquid pipe connection port	See note 2.
No.	Parts name	Remarks

3D058618B

REYQ144, 168, 192, 216, 240PYDN

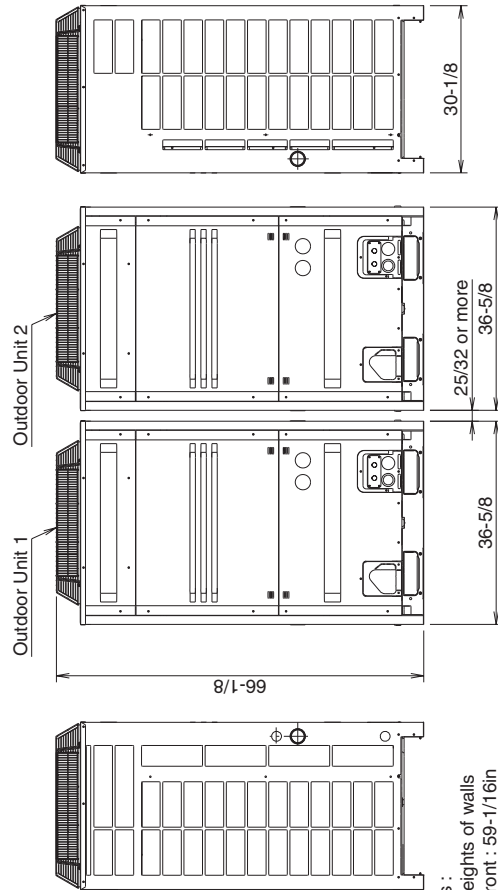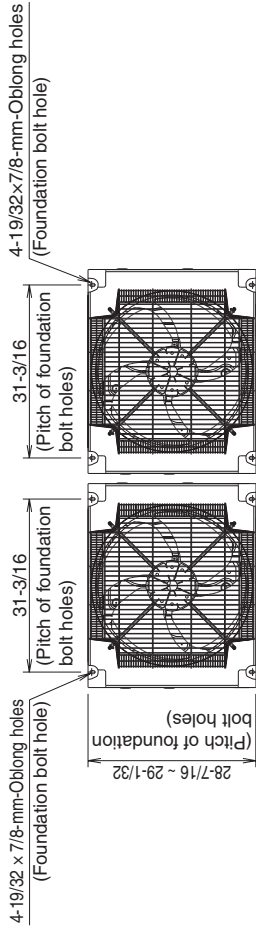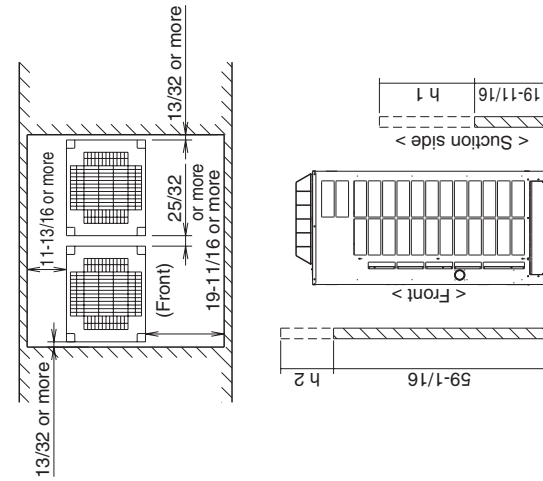


- Notes :
1. Heights of walls
Front : 59-1/16in
Suction side : 19-11/16in
Side : Height unrestricted
The installation space shown in this figure is based on the condition of cooling operation at the outdoor air temperature of 95°F.
The installation space of suction side shown above must be expanded in the following case.
· Design outdoor temperature becomes over 95°F.
 2. Operating over Max. operating load (In case of causing a heavy heating load at indoor unit side)
If the above wall heights are exceeded then h2/2 and h1/2 should be added to the front and suction side service spaces respectively as shown in the following figure.
 3. When installing the units the most appropriate pattern should be selected from those shown above in order to obtain the best fit in the space available always bearing in mind the need to leave enough room for a person to pass between units and wall and for the air to circulate freely.
(If more units are to be installed than are catered for in the above patterns your layout should take account of the possibility of short circuits.)
 4. The units should be installed to leave sufficient space at the front for the on site refrigerant piping work to be carried out comfortably.




Model Name	Outdoor Unit 1	Outdoor Unit 2	Drawing No.	Drawing No.
RXYQ144PYDN	RXYQ72PYDN	RXYQ72PYDN	3D058616	3D058616
RXYQ168PYDN	RXYQ72PYDN	RXYQ96PYDN	3D058616	3D058616
RXYQ192PYDN	RXYQ72PYDN	RXYQ120PYDN	3D058616	3D058616
RXYQ216PYDN	RXYQ96PYDN	RXYQ120PYDN	3D058616	3D058616
RXYQ240PYDN	RXYQ120PYDN	RXYQ120PYDN	3D058616	3D058616
RXYQ168PTJU	RXYQ72PTJU	RXYQ96PTJU	3D058616	3D058616
RXYQ192PTJU	RXYQ72PTJU	RXYQ120PTJU	3D058616	3D058616
RXYQ216PTJU	RXYQ96PTJU	RXYQ120PTJU	3D058616	3D058616
RXYQ240PTJU	RXYQ120PTJU	RXYQ120PTJU	3D058616	3D058616
REYQ144PYDN	REMQ72PYDN	REMQ72PYDN	3D058617	3D058617
REYQ168PYDN	REMQ72PYDN	REMQ96PYDN	3D058617	3D058617
REYQ192PYDN	REMQ96PYDN	REMQ120PYDN	3D058617	3D058617
REYQ216PYDN	REMQ120PYDN	REMQ120PYDN	3D058617	3D058617
REYQ240PYDN	REMQ120PYDN	REMQ120PYDN	3D058617	3D058617
REYQ168PTJU	REMQ72PTJU	REMQ96PTJU	3D058617	3D058617
REYQ192PTJU	REMQ72PTJU	REMQ120PTJU	3D058617	3D058617
REYQ216PTJU	REMQ96PTJU	REMQ120PTJU	3D058617	3D058617
REYQ240PTJU	REMQ120PTJU	REMQ120PTJU	3D058617	3D058617

3D058617


REM72, 96, 120PYDN

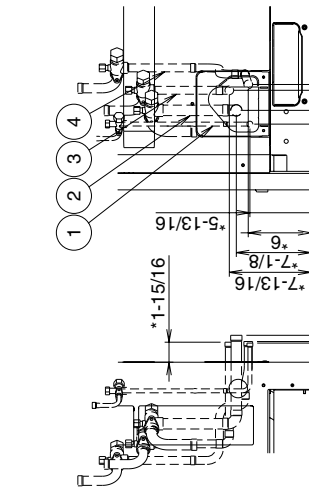

- Notes
- For piping connection method (front and bottom sides), see the installation manual.
 - High and low pressure gas pipe
 φ 3/4 Brazing connection...REM72, 96, 120P
 Suction gas pipe
 φ 7/8 Brazing connection...REM72, 96P
 φ 1-1/8 Brazing connection...REM72, 96P
 Liquid pipe
 φ 3/8 Brazing connection...REM72, 96P
 φ 1/2 Brazing connection...REM72, 96P
 - * shows the dimensions after fixing the accessory pipes.

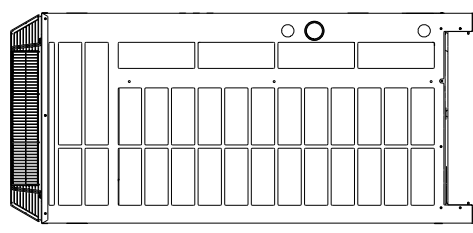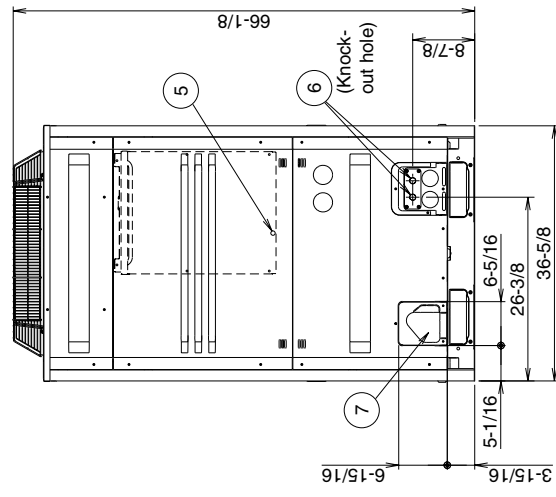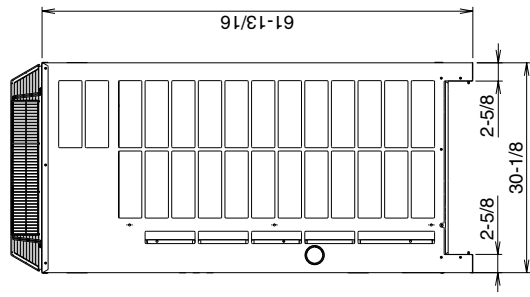

[DETAIL FOR FRONT SIDE]

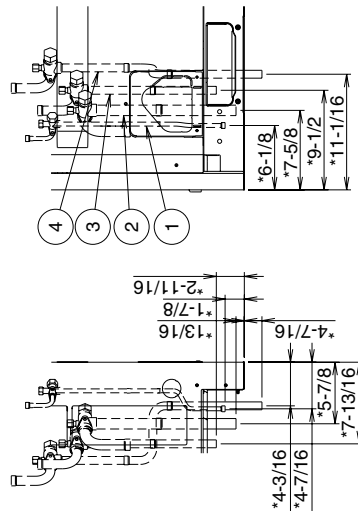


[DETAIL FOR BOTTOM SIDE]

9	Pipe routing hole (bottom)	φ 1-15/16	See note 1.
8	Pipe routing hole (bottom)		See note 1.
7	Pipe routing hole (front)		See note 1.
6	Power cord routing hole (front)	φ 7/8	
5	Grounding terminal		Inside of el. compo. box (MB)
4	Pressure equalizer pipe connection port	φ 3/4	Brazing connection
3	High and low pressure gas pipe connection port		See note 2.
2	Suction gas pipe connection port		See note 2.
1	Liquid pipe connection port		See note 2.
No.	Parts name		Remarks




3D058617A

REM96, 120PYDN

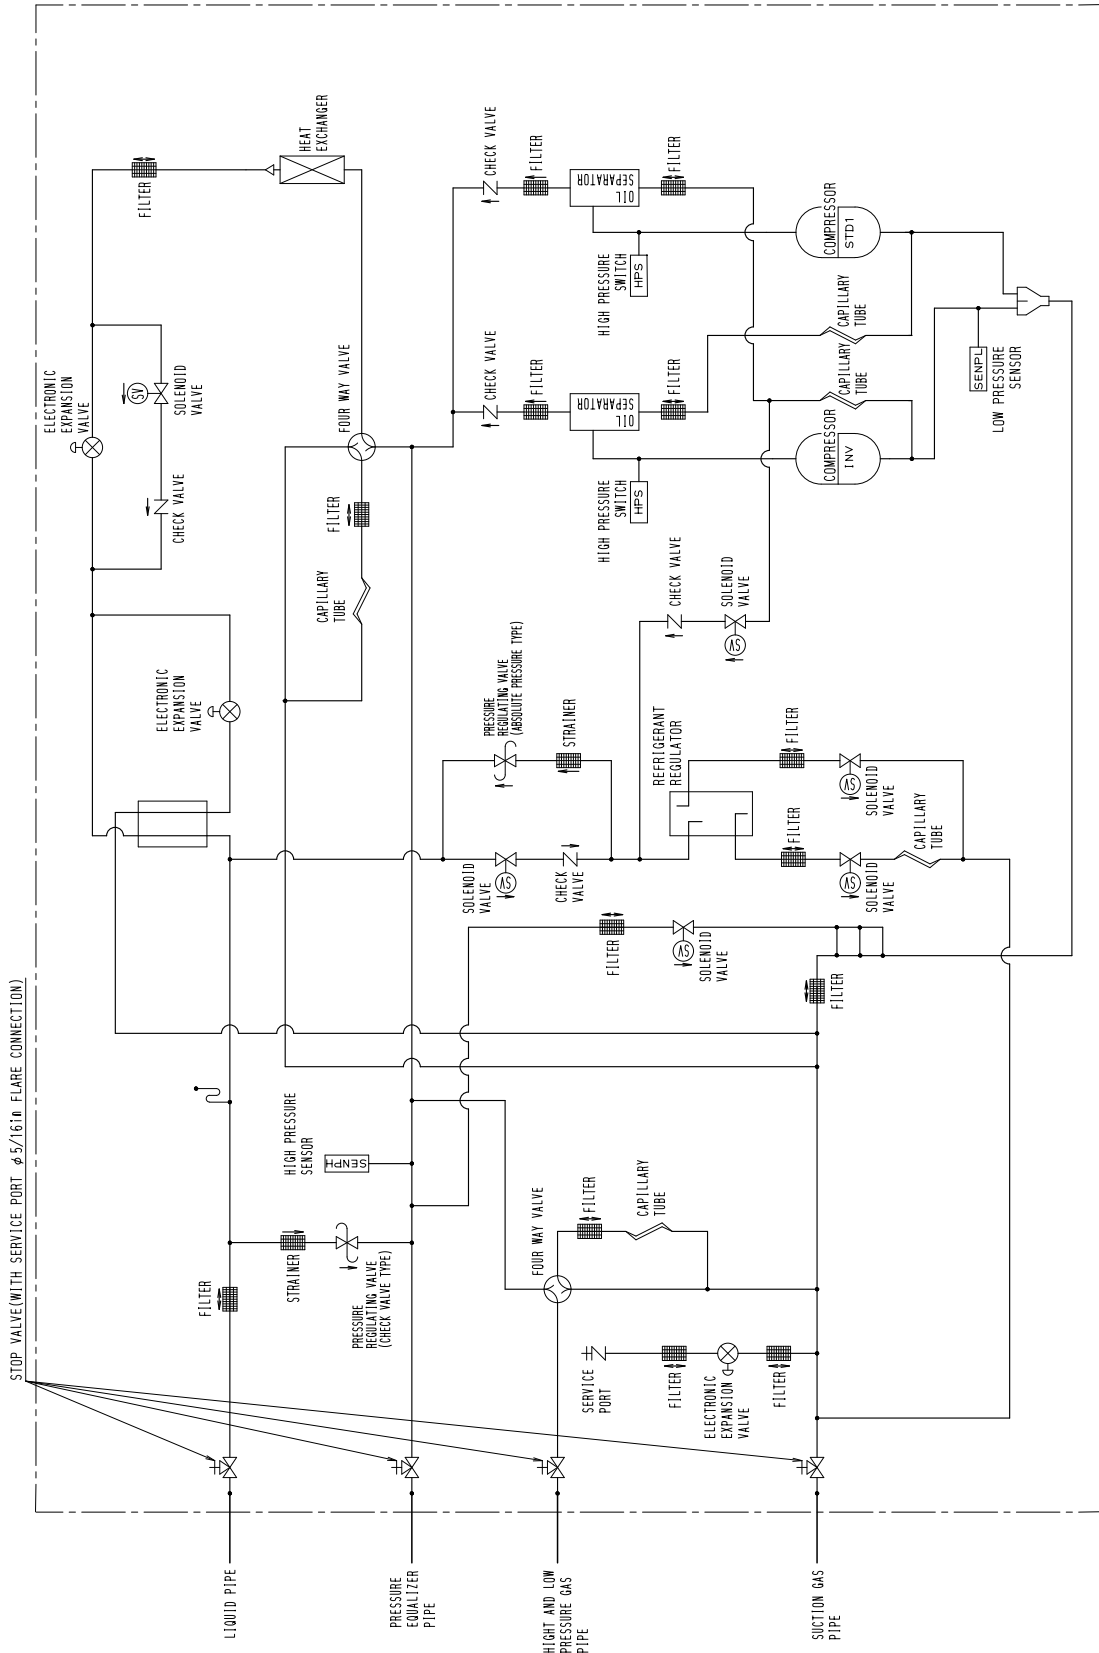

3D058638A

REM7Q2PYDN

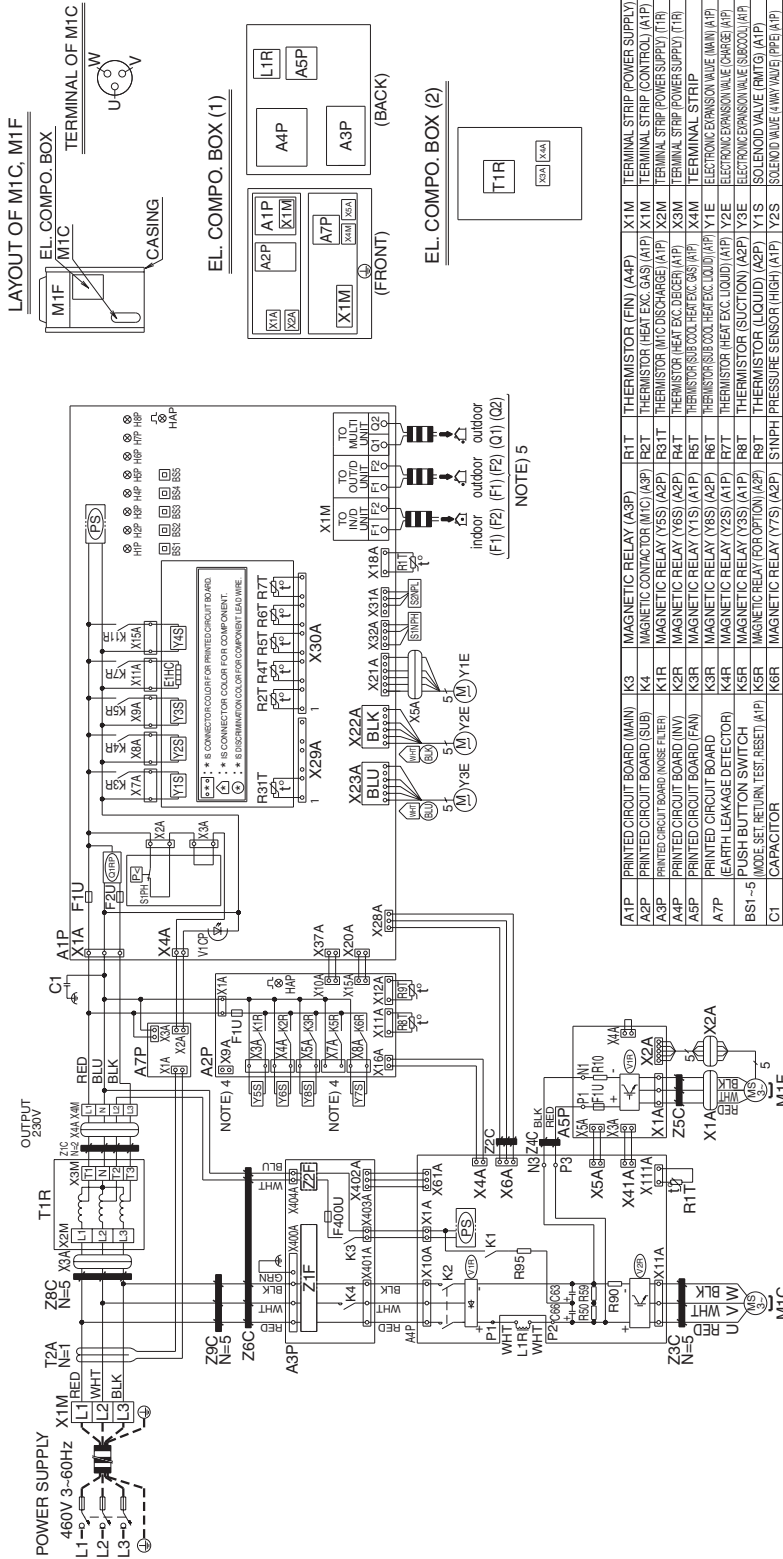


NOTE) 5
indoor outdoor (F1) (F2) (Q1) (Q2)

A1P	PRINTED CIRCUIT BOARD (MAIN)	K3	MAGNETIC RELAY (A3P)	R1T	THERMISTOR (FIN) (A4P)	X1M	TERMINAL STRIP (POWER SUPPLY)
A2P	PRINTED CIRCUIT BOARD (SUB)	K4	MAGNETIC RELAY (M1C) (A3P)	R2T	THERMISTOR (HEAT EXC. GAS) (A1P)	X1M	TERMINAL STRIP (CONTROL) (A1P)
A3P	PRINTED CIRCUIT BOARD (NOISE FILTER)	K1R	MAGNETIC RELAY (Y5S) (A2P)	R3T	THERMISTOR (MTC DISCHARGE) (A1P)	X2M	TERMINAL STRIP (POWER SUPPLY) (T1R)
A4P	PRINTED CIRCUIT BOARD (FAN)	K2R	MAGNETIC RELAY (Y6S) (A2P)	R4T	THERMISTOR (HEAT EXC. DISCHARGE) (A1P)	X3M	TERMINAL STRIP (POWER SUPPLY) (T1R)
A5P	PRINTED CIRCUIT BOARD (FAN)	K3R	MAGNETIC RELAY (Y1S) (A1P)	R5T	THERMISTOR (COL. HEAT EXC.) (A1P)	X4M	TERMINAL STRIP
A7P	PRINTED CIRCUIT BOARD	K3R	MAGNETIC RELAY (Y8S) (A2P)	R6T	THERMISTOR (S33 COL. HEAT EXC. LOAD) (A1P)	Y1E	ELECTRONIC EXPANSION VALVE (MAIN) (A1P)
BS1-5	EARTH LEAKAGE DETECTOR	K4R	MAGNETIC RELAY (Y2S) (A1P)	R7T	THERMISTOR (HEAT EXC. LIQUID) (A1P)	Y2E	ELECTRONIC EXPANSION VALVE (CHARGE) (A1P)
C1	CAPACITOR	K5R	MAGNETIC RELAY (FOR OPTION) (A2P)	R8T	THERMISTOR (SUCTION) (A2P)	Y3E	ELECTRONIC EXPANSION VALVE (SUBCOOL) (A1P)
CS	CRANKCASE HEATER (A1P)	K6R	MAGNETIC RELAY (Y7S) (A2P)	SNPH	PRESSURE SENSOR (HIGH) (A1P)	Y2S	SOLENOID VALVE (4WAY) (TYPE) (A1P)
ETHC	CRANKCASE HEATER (A1P)	K7R	MAGNETIC RELAY (ETHC) (A1P)	SNPL	PRESSURE SENSOR (LOW) (A1P)	Y3S	SOLENOID VALVE (4WAY) (TYPE) (A1P)
F1U	FUSE (T, 3.15A, 250V) (A1P)	L1R	MAGNETIC RELAY (Y4S) (A1P)	STPH	PRESSURE SWITCH (HIGH) (A1P)	Y4S	SOLENOID VALVE (RM TL) (A1P)
F2U	FUSE (T, 3.15A, 250V) (A2P)	M1C	MOTOR (COMPRESSOR)	T2A	CURRENT SENSOR (A7P)	Y6S	SOLENOID VALVE (HOT GAS) (A2P)
F400U	FUSE (T, 6.3A, 250V) (A3P)	PS	SWITCHING POWER SUPPLY (A1P, A1P)	VTCP	SAFETY SENSOR INPUT (A1P)	Y7S	SOLENOID VALVE (RM TO) (A2P)
H1P-8P	HP PREPARE TEST	Q1R	PHASE REVERSAL DETECT CIRCUIT (A1P)	V1R	DIODE BRIDGE (A4P)	Y8S	SOLENOID VALVE (FM TO) (A2P)
HAP	PLOT LAMP SERVICE MONITOR (A1P) (A2P)	R50, R59	RESISTOR (CURRENT SENSOR) (A3P)	V2R	POWER MODULE (A5P)	Z1C-ZC	NOISE FILTER (FERRITE CORE)
K1	MAGNETIC CONTACTOR (M1C) (A4P)	R90	RESISTOR (CURRENT LIMITING) (A4P)	X1A, X2A	CONNECTOR (M1F)	Z1F-ZF	NOISE FILTER (WITH SURGE ABSORBER) (A3P)
K2	MAGNETIC CONTACTOR (M1C) (A4P)	R1T	THERMISTOR (AIR) (A1P)	X3A	CONNECTOR	X7A	OPERATION OUTPUT (A2P)
				X4A	CONNECTOR	X9A	POWER SUPPLY (ADAPTER) (A2P)

- NOTES)
1. THIS WIRING DIAGRAM IS APPLIED ONLY TO THE OUTDOOR UNIT.
 2. : TERMINAL STRIP : FIELD WIRING.
 3. : PROTECTIVE GROUND (SCREW)
 4. WHEN USING THE OPTIONAL ADAPTOR, REFER TO THE INSTALLATION MANUAL OF THE OPTIONAL ADAPTOR.
 5. FOR CONNECTION WIRING TO INDOOR-OUTDOOR TRANSMISSION F1 · F2, OUTDOOR-MULTI TRANSMISSION Q1 · Q2, REFER TO THE INSTALLATION MANUAL.
 6. HOW TO USE BS1-5, REFER TO "SERVICE PRECAUTION" LABEL ON ELECTRICAL COMPONENTS BOX COVER.
 7. WHEN OPERATING, DON'T SHORT-CIRCUIT THE PROTECTION DEVICE (S1PH, S2PH).
 8. COLORS BLK : BLACK RED : RED BLU : BLUE WHT : WHITE GRN : GREEN.


3D068613D

REM96, 120PYDN

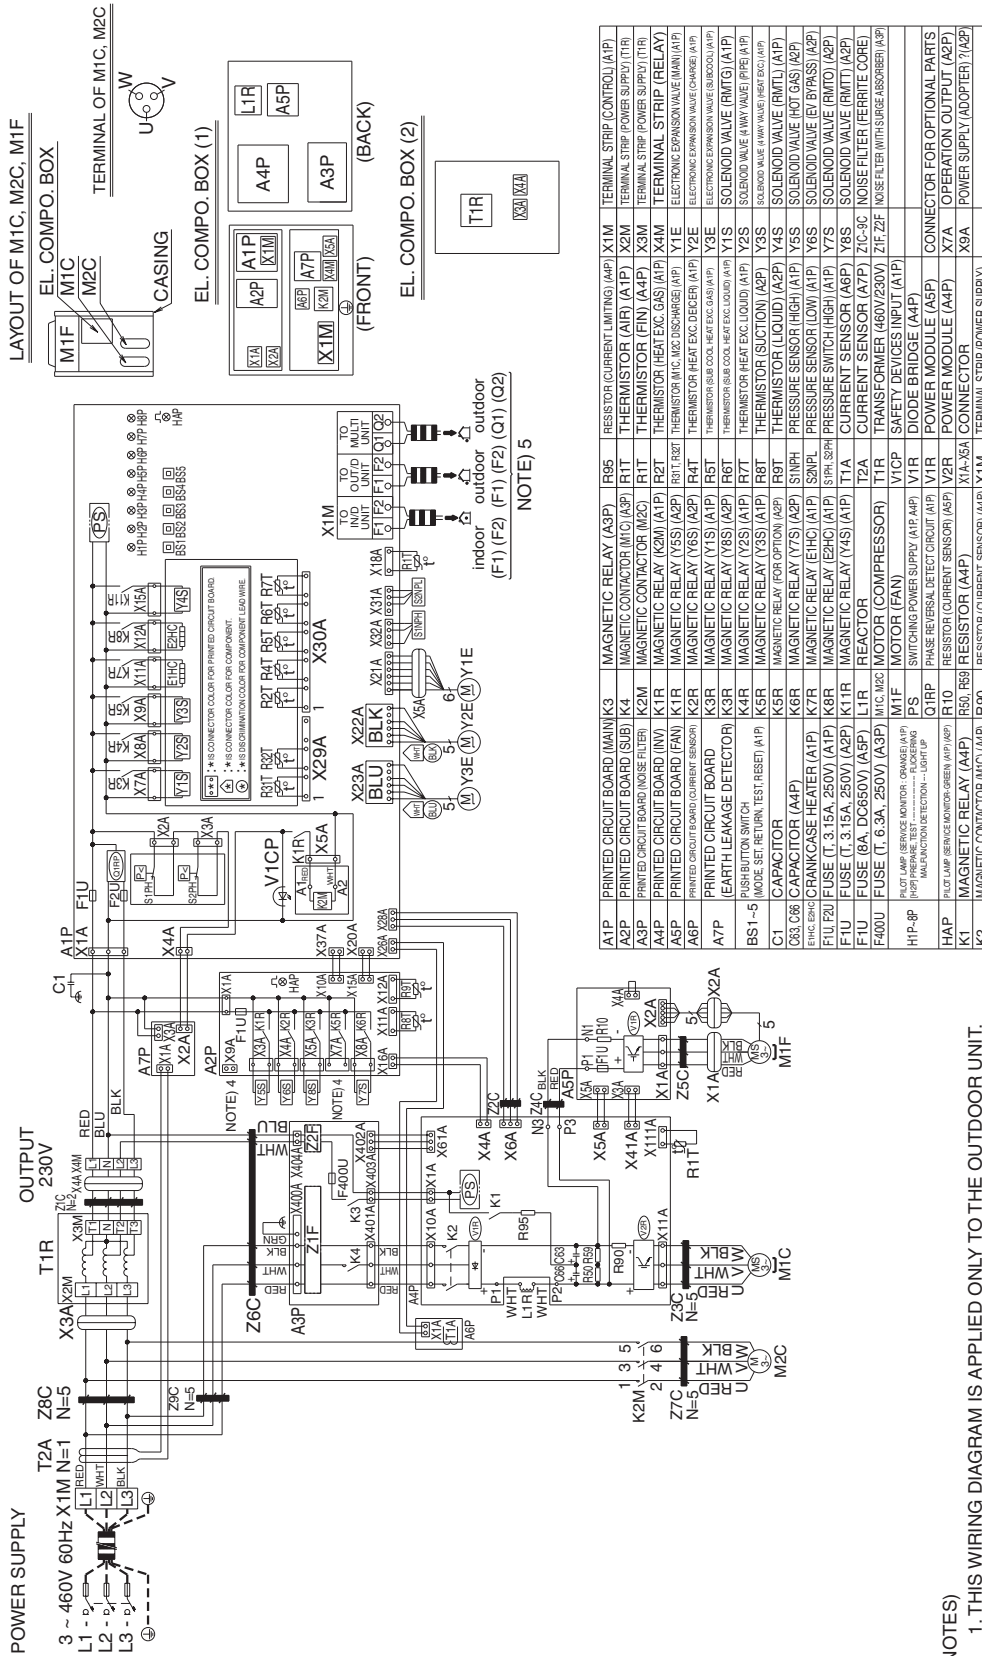

6. Field Wiring

REYQ72, 96, 120PYDN

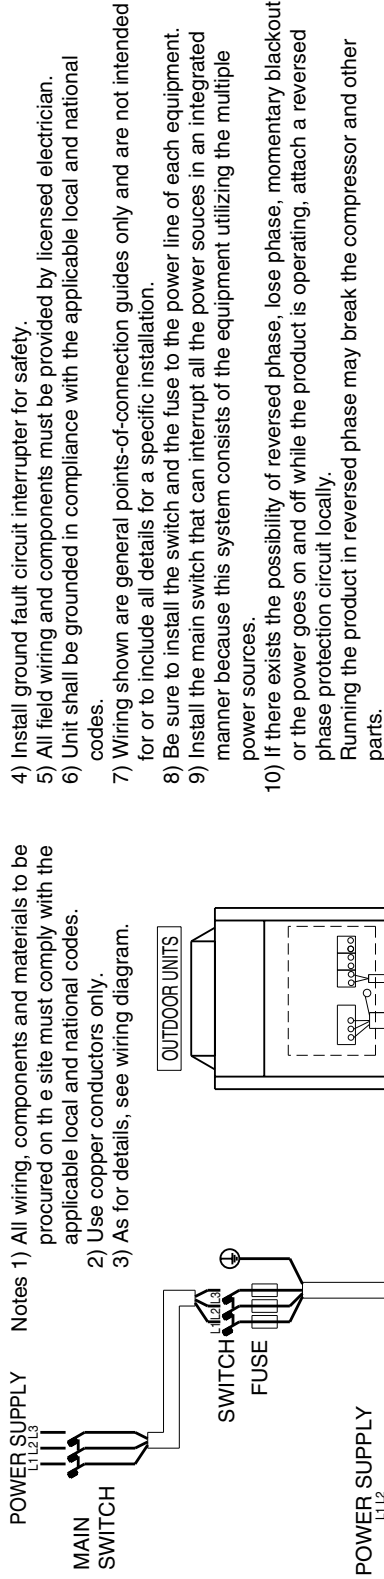

- Notes
- 1) All wiring, components and materials to be procured on the site must comply with the applicable local and national codes.
 - 2) Use copper conductors only.
 - 3) As for details, see wiring diagram.


- 4) Install ground fault circuit interrupter for safety.
- 5) All field wiring and components must be provided by licensed electrician.
- 6) Unit shall be grounded in compliance with the applicable local and national codes.
- 7) Wiring shown are general points-of-connection guides only and are not intended for or to include all details for a specific installation.
- 8) Be sure to install the switch and the fuse to the power line of each equipment.
- 9) Install the main switch that can interrupt all the power sources in an integrated manner because this system consists of the equipment utilizing the multiple power sources.
- 10) If there exists the possibility of reversed phase, lose phase, momentary blackout or the power goes on and off while the product is operating, attach a reversed phase protection circuit locally.
Running the product in reversed phase may break the compressor and other parts.

3D058622

REYQ144, 168, 192, 216, 240PYDN

- 6) Unit shall be grounded in compliance with the applicable local and national codes.
- 7) Wiring shown are general points-of-connection guides only and are not intended for or to include all details for a specific installation.
- 8) Be sure to install the switch and the fuse to the power line of each equipment.
- 9) Install the main switch that can interrupt all the power sources in an integrated manner because this system consists of the equipment utilizing the multiple power sources.
- 10) The capacity of UNIT1 must be larger than UNIT2 when the power source is connected in series between the units.
- 11) If there exists the possibility of reversed phase, lose phase, momentary blackout or the power goes on and off while the product is operating, attach a reversed phase protection circuit locally. Running the product in reversed phase may break the compressor and other parts.

- Notes 1) All wiring, components and materials to be procured on the site must comply with the applicable local and national codes.
- 2) Use copper conductors only.
 - 3) As for details, see wiring diagram.
 - 4) Install ground fault circuit interrupter for safety.
 - 5) All field wiring and components must be provided by licensed electrician.
- < When the power source is supplied to each outdoor unit individually. >

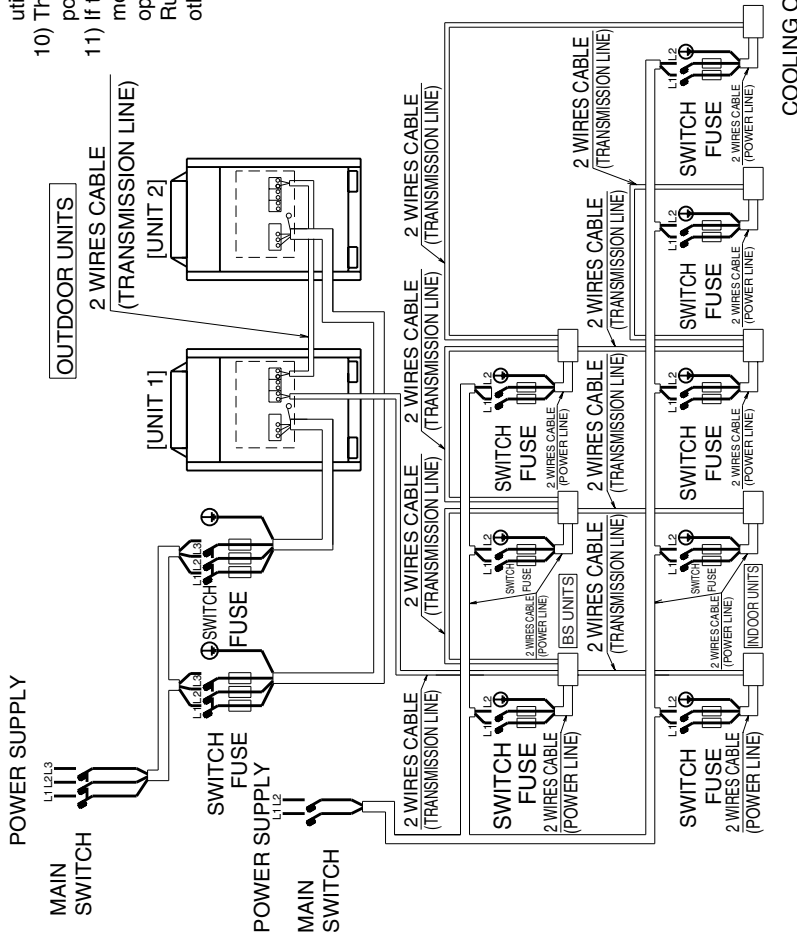


3D059671

7. Electric Characteristics

REYQ72, 96, 120PYDN

Model Name	Units				Power supply			Comp.		OFM	
	Hz	Volts	Min.	Max.	MCA	TOCA	MFA	MSC	RLA	KW	FLA
REYQ72PYDN	60	460	416	508	16.0	31.5	20	65	2.4+7.0	0.35x2	0.6x2
REYQ96PYDN	60	460	416	508	20.4	31.5	25	65	4.2+7.0	0.35x2	0.6x2
REYQ120PYDN	60	460	416	508	20.5	31.5	25	65	6.0+6.8	0.35x2	0.7x2

The relationship between the starting time and the starting current,

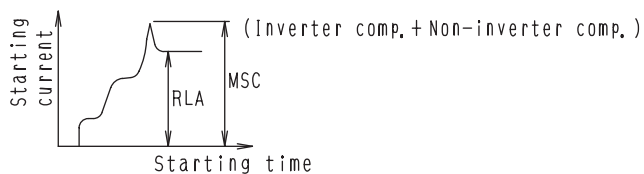

Notes:

1. RLA is based on the following conditions,
Indoor temp, 80°FDB/67°FWB
Outdoor temp, 95°FDB
2. TOCA means the total value of each OC set.
3. MSC means the Max. current during the starting of compressor.
4. Voltage range
Units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
5. Maximum allowable voltage variation between phases is 2%.
6. Select wire size based on the larger value of MCA or TOCA.
7. MFA is used to select the circuit breaker and the ground fault circuit interrupter (ground leakage circuit breaker).

Symbols:


- MCA :Min. Circuit Amps, (A)
TOCA :Total Over-current Amps, (A)
MFA :Max. Fuse Amps, (A)
MSC :Max. Starting current
RLA :Rated Load Amps, (A)
OFM :Outdoor Fan Motor
FLA :Full Load Amps, (A)
kW :Rated Motor Output(kw)

3D059058

REYQ144, 168, 192, 216, 240PYDN

Combination Unit	Model Name		Units				Power supply				Comp.		DFM	
	Independent Unit		Hz	Volts	Min.	Max.	MCA	TOCA	MFA	MSC	RLA	KW	FLA	
REYQ144PYDN	REMQ72PYDN	REMQ72PYDN	60	460	416	508	33.4	16.5+16.5	25+25	-	7.1+7.1	0.75+0.75	0.6+0.6	
REYQ168PYDN	REMQ72PYDN	REMQ96PYDN	60	460	416	508	37.0	16.5+31.5	25+25	69	7.1+3.9+8.4	0.75+0.75	0.6+0.8	
REYQ192PYDN	REMQ72PYDN	REMQ120PYDN	60	460	416	508	37.2	16.5+31.5	25+30	69	7.1+6.1+8.4	0.75+0.75	0.6+0.8	
REYQ216PYDN	REMQ96PYDN	REMQ120PYDN	60	460	416	508	40.8	31.5+31.5	25+30	77	3.9+8.4+6.1+8.4	0.75+0.75	0.8+1.0	
REYQ240PYDN	REMQ120PYDN	REMQ120PYDN	60	460	416	508	41.0	31.5+31.5	30+30	78	6.1+8.4+6.1+8.4	0.75+0.75	1.0+1.0	

The relationship between the starting time and the starting current.

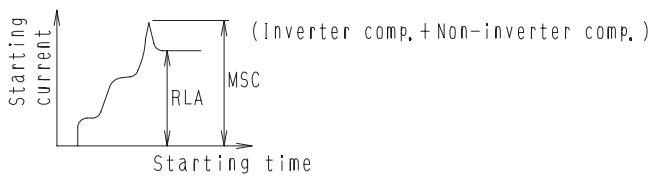

Notes:

1. RLA is based on the following conditions.
Indoor temp, 80°F DB/67, 0°F WB
Outdoor temp, 95°F DB
2. TOCA means the total value of each DC set.
3. MSC means the Max. current during the starting of compressor.
4. Voltage range
Units are suitable for use on electrical systems where voltage supplied to unit terminal is not below or above listed range limits.
5. Maximum allowable voltage variation between phases is 2%.
6. Select wire size based on the larger value of MCA or TOCA.
7. MFA is used to select the circuit breaker and the ground fault circuit interrupter (earth leakage circuit breaker).

Symbols:

- MCA :Min. Circuit Amps, (A)
- TOCA :Total Over-current Amps, (A)
- MFA :Max. Fuse Amps, (A)
- MSC :Max. Starting current
- RLA :Rated Load Amps, (A)
- DFM :Outdoor Fan Motor
- FLA :Full Load Amps, (A)
- kW :Rated Motor Output(kW)

3D059059I

8. Capacity Table (Reference Data)

8.1 Cooling Capacity (REYQ-PYDN)

These tables are based on projection. Actual results may vary according to conditions of use.

REYQ72PYDN

Outdoor air temp. (F/DB)	Combi-nation (%)	Indoor air temp. F/WB											
		57			61			64			70		
		TC	PI	TC	PI	TC	PI	TC	PI	TC	PI	TC	PI
50	90	42.0	1.57	51.1	1.93	58.0	2.22	63.7	2.64	71.6	3.32	83.0	4.16
54	90	42.0	1.60	51.1	1.97	58.0	2.26	63.7	2.68	71.6	3.36	83.0	4.20
58	90	42.0	1.63	51.1	2.01	58.0	2.30	63.7	2.72	71.6	3.40	83.0	4.24
62	90	42.0	1.66	51.1	2.05	58.0	2.34	63.7	2.76	71.6	3.44	83.0	4.28
66	90	42.0	1.69	51.1	2.09	58.0	2.38	63.7	2.80	71.6	3.48	83.0	4.32
70	90	42.0	1.73	51.1	2.14	58.0	2.43	63.7	2.85	71.6	3.53	83.0	4.37
72	90	42.0	1.75	51.1	2.16	58.0	2.45	63.7	2.87	71.6	3.55	83.0	4.39
74	90	42.0	1.78	51.1	2.19	58.0	2.48	63.7	2.90	71.6	3.58	83.0	4.42
76	90	42.0	1.81	51.1	2.23	58.0	2.52	63.7	2.94	71.6	3.62	83.0	4.46
78	90	42.0	1.84	51.1	2.26	58.0	2.55	63.7	2.97	71.6	3.65	83.0	4.49
80	90	42.0	1.87	51.1	2.29	58.0	2.58	63.7	3.00	71.6	3.68	83.0	4.52
82	90	42.0	1.90	51.1	2.32	58.0	2.61	63.7	3.03	71.6	3.71	83.0	4.55
84	90	42.0	1.93	51.1	2.35	58.0	2.64	63.7	3.06	71.6	3.74	83.0	4.58
86	90	42.0	1.96	51.1	2.38	58.0	2.67	63.7	3.09	71.6	3.77	83.0	4.61
88	90	42.0	1.99	51.1	2.41	58.0	2.70	63.7	3.12	71.6	3.80	83.0	4.64
90	90	42.0	2.02	51.1	2.44	58.0	2.73	63.7	3.15	71.6	3.83	83.0	4.67
92	90	42.0	2.05	51.1	2.47	58.0	2.76	63.7	3.18	71.6	3.86	83.0	4.70
94	90	42.0	2.08	51.1	2.50	58.0	2.79	63.7	3.21	71.6	3.89	83.0	4.73
96	90	42.0	2.11	51.1	2.53	58.0	2.82	63.7	3.24	71.6	3.92	83.0	4.76
98	90	42.0	2.14	51.1	2.56	58.0	2.85	63.7	3.27	71.6	3.95	83.0	4.79
100	90	42.0	2.17	51.1	2.59	58.0	2.88	63.7	3.30	71.6	3.98	83.0	4.82
50	80	32.7	1.52	39.8	1.89	46.1	2.28	50.4	2.74	57.6	3.57	69.7	4.56
54	80	32.7	1.55	39.8	1.92	46.1	2.31	50.4	2.77	57.6	3.60	69.7	4.59
58	80	32.7	1.58	39.8	1.95	46.1	2.34	50.4	2.80	57.6	3.63	69.7	4.62
62	80	32.7	1.61	39.8	1.98	46.1	2.37	50.4	2.83	57.6	3.66	69.7	4.65
66	80	32.7	1.64	39.8	2.01	46.1	2.40	50.4	2.86	57.6	3.69	69.7	4.68
70	80	32.7	1.67	39.8	2.04	46.1	2.43	50.4	2.89	57.6	3.72	69.7	4.71
72	80	32.7	1.70	39.8	2.07	46.1	2.46	50.4	2.92	57.6	3.75	69.7	4.74
74	80	32.7	1.73	39.8	2.10	46.1	2.49	50.4	2.95	57.6	3.78	69.7	4.77
76	80	32.7	1.76	39.8	2.13	46.1	2.52	50.4	2.98	57.6	3.81	69.7	4.80
78	80	32.7	1.79	39.8	2.16	46.1	2.55	50.4	3.01	57.6	3.84	69.7	4.83
80	80	32.7	1.82	39.8	2.19	46.1	2.58	50.4	3.04	57.6	3.87	69.7	4.86
82	80	32.7	1.85	39.8	2.22	46.1	2.61	50.4	3.07	57.6	3.90	69.7	4.89
84	80	32.7	1.88	39.8	2.25	46.1	2.64	50.4	3.10	57.6	3.93	69.7	4.92
86	80	32.7	1.91	39.8	2.28	46.1	2.67	50.4	3.13	57.6	3.96	69.7	4.95
88	80	32.7	1.94	39.8	2.31	46.1	2.70	50.4	3.16	57.6	3.99	69.7	4.98
90	80	32.7	1.97	39.8	2.34	46.1	2.73	50.4	3.19	57.6	4.02	69.7	5.01
92	80	32.7	2.00	39.8	2.37	46.1	2.76	50.4	3.22	57.6	4.05	69.7	5.04
94	80	32.7	2.03	39.8	2.40	46.1	2.79	50.4	3.25	57.6	4.08	69.7	5.07
96	80	32.7	2.06	39.8	2.43	46.1	2.82	50.4	3.28	57.6	4.11	69.7	5.10
98	80	32.7	2.09	39.8	2.46	46.1	2.85	50.4	3.31	57.6	4.14	69.7	5.13
100	80	32.7	2.12	39.8	2.49	46.1	2.88	50.4	3.34	57.6	4.17	69.7	5.16
50	70	28.0	1.07	34.1	1.28	38.6	1.44	43.2	1.61	47.8	2.16	55.3	2.10
54	70	28.0	1.10	34.1	1.31	38.6	1.47	43.2	1.64	47.8	2.19	55.3	2.13
58	70	28.0	1.13	34.1	1.34	38.6	1.50	43.2	1.67	47.8	2.22	55.3	2.16
62	70	28.0	1.16	34.1	1.37	38.6	1.53	43.2	1.70	47.8	2.25	55.3	2.19
66	70	28.0	1.19	34.1	1.40	38.6	1.56	43.2	1.73	47.8	2.28	55.3	2.22
70	70	28.0	1.22	34.1	1.43	38.6	1.59	43.2	1.76	47.8	2.31	55.3	2.25
72	70	28.0	1.25	34.1	1.46	38.6	1.62	43.2	1.79	47.8	2.34	55.3	2.28
74	70	28.0	1.28	34.1	1.49	38.6	1.65	43.2	1.82	47.8	2.37	55.3	2.31
76	70	28.0	1.31	34.1	1.52	38.6	1.68	43.2	1.85	47.8	2.40	55.3	2.34
78	70	28.0	1.34	34.1	1.55	38.6	1.71	43.2	1.88	47.8	2.43	55.3	2.37
80	70	28.0	1.37	34.1	1.58	38.6	1.74	43.2	1.91	47.8	2.46	55.3	2.40
82	70	28.0	1.40	34.1	1.61	38.6	1.77	43.2	1.94	47.8	2.49	55.3	2.43
84	70	28.0	1.43	34.1	1.64	38.6	1.80	43.2	1.97	47.8	2.52	55.3	2.46
86	70	28.0	1.46	34.1	1.67	38.6	1.83	43.2	2.00	47.8	2.55	55.3	2.49
88	70	28.0	1.49	34.1	1.70	38.6	1.86	43.2	2.03	47.8	2.58	55.3	2.52
90	70	28.0	1.52	34.1	1.73	38.6	1.89	43.2	2.06	47.8	2.61	55.3	2.55
92	70	28.0	1.55	34.1	1.76	38.6	1.92	43.2	2.09	47.8	2.64	55.3	2.58
94	70	28.0	1.58	34.1	1.79	38.6	1.95	43.2	2.12	47.8	2.67	55.3	2.61
96	70	28.0	1.61	34.1	1.82	38.6	1.98	43.2	2.15	47.8	2.70	55.3	2.64
98	70	28.0	1.64	34.1	1.85	38.6	2.01	43.2	2.18	47.8	2.73	55.3	2.67
100	70	28.0	1.67	34.1	1.88	38.6	2.04	43.2	2.21	47.8	2.76	55.3	2.70
50	60	24.0	0.84	28.4	1.04	32.2	1.23	36.0	1.37	39.8	1.91	47.8	2.10
54	60	24.0	0.87	28.4	1.07	32.2	1.26	36.0	1.40	39.8	1.94	47.8	2.13
58	60	24.0	0.90	28.4	1.10	32.2	1.29	36.0	1.43	39.8	1.97	47.8	2.16
62	60	24.0	0.93	28.4	1.13	32.2	1.32	36.0	1.46	39.8	2.00	47.8	2.19
66	60	24.0	0.96	28.4	1.16	32.2	1.35	36.0	1.49	39.8	2.03	47.8	2.22
70	60	24.0	0.99	28.4	1.19	32.2	1.38	36.0	1.52	39.8	2.06	47.8	2.25
72	60	24.0	1.02	28.4	1.22	32.2	1.41	36.0	1.55	39.8	2.09	47.8	2.28
74	60	24.0	1.05	28.4	1.25	32.2	1.44	36.0	1.58	39.8	2.12	47.8	2.31
76	60	24.0	1.08	28.4	1.28	32.2	1.47	36.0	1.61	39.8	2.15	47.8	2.34
78	60	24.0	1.11	28.4	1.31	32.2	1.50	36.0	1.64	39.8	2.18	47.8	2.37
80	60	24.0	1.14	28.4	1.34	32.2	1.53	36.0	1.67	39.8	2.21	47.8	2.40
82	60	24.0	1.17	28.4	1.37	32.2	1.56	36.0	1.70	39.8	2.24	47.8	2.43
84	60	24.0	1.20	28.4	1.40	32.2	1.59	36.0	1.73	39.8	2.27	47.8	2.46
86	60	24.0	1.23	28.4	1.43	32.2	1.62	36.0	1.76	39.8	2.30	47.8	2.49
88	60	24.0	1.26	28.4	1.46	32.2	1.65	36.0	1.79	39.8	2.33	47.8	2.52
90	60	24.0	1.29	28.4	1.49	32.2	1.68	36.0	1.82	39.8	2.36	47.8	2.55
92	60	24.0	1.32	28.4	1.52	32.2	1.71	36.0	1.85	39.8	2.39	47.8	2.58
94	60	24.0	1.35	28.4	1.55	32.2	1.74	36.0	1.88	39.8	2.42	47.8	2.61
96	60	24.0	1.38	28.4	1.58	32.2	1.77	36.0	1.91	39.8	2.45	47.8	2.64
98	60	24.0	1.41	28.4	1.61	32.2	1.80	36.0	1.94	39.8	2.48	47.8	2.67

REYQ96PYDN

Outdoor air temp. (F/D-B)	Indoor air temp. F-W-B												Cooling capacity											
	57			61			64			67			70			72			75					
	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH			
90	50	56.1	2.49	68.2	3.06	77.3	3.51	86.4	3.98	95.5	4.47	102	4.80	111	5.30	118	5.75	125	6.15	132	6.55	139	6.95	
	54	56.1	2.53	68.2	3.12	77.3	3.57	86.4	4.06	95.5	4.56	102	4.90	111	5.41	118	5.86	125	6.26	132	6.66	139	7.06	
	58	56.1	2.58	68.2	3.18	77.3	3.62	86.4	4.21	95.5	4.70	102	5.04	111	5.46	118	5.91	125	6.31	132	6.71	139	7.11	
	62	56.1	2.63	68.2	3.25	77.3	3.70	86.4	4.34	95.5	4.82	102	5.17	111	5.61	118	6.06	125	6.46	132	6.86	139	7.26	
	66	56.1	2.69	68.2	3.32	77.3	3.77	86.4	4.47	95.5	4.95	102	5.29	111	5.74	118	6.19	125	6.59	132	6.99	139	7.39	
	70	56.1	2.74	68.2	3.39	77.3	3.84	86.4	4.60	95.5	5.02	102	5.41	111	5.86	118	6.26	125	6.66	132	7.06	139	7.49	
	72	56.1	2.77	68.2	3.43	77.3	3.90	86.4	4.73	95.5	5.10	102	5.46	111	5.91	118	6.31	125	6.71	132	7.11	139	7.54	
	74	56.1	2.82	68.2	3.51	77.3	4.05	86.4	5.00	95.5	5.23	102	5.63	111	6.06	118	6.46	125	6.86	132	7.26	139	7.64	
	76	56.1	3.02	68.2	3.88	77.3	4.60	86.4	5.80	95.5	6.23	102	6.36	111	6.99	118	7.49	125	7.99	132	8.49	139	8.99	
	78	56.1	3.24	68.2	4.17	77.3	4.95	86.4	6.50	95.5	7.22	102	7.36	111	8.06	118	8.56	125	9.06	132	9.56	139	10.06	
80	56.1	3.46	68.2	4.47	77.3	5.31	86.4	7.25	95.5	7.72	102	7.86	111	8.56	118	9.06	125	9.56	132	10.06	139	10.56		
80	50	56.1	3.56	68.2	4.59	77.3	5.49	86.4	7.76	95.5	8.23	102	8.37	111	9.07	118	9.57	125	10.07	132	10.57	139	11.07	
	54	56.1	3.66	68.2	4.73	77.3	5.73	86.4	8.46	95.5	8.93	102	9.07	111	9.77	118	10.27	125	10.77	132	11.27	139	11.77	
	58	56.1	3.76	68.2	4.87	77.3	5.87	86.4	9.19	95.5	9.66	102	9.80	111	10.50	118	10.99	125	11.49	132	11.99	139	12.49	
	62	56.1	3.86	68.2	5.01	77.3	6.01	86.4	9.52	95.5	9.99	102	10.10	111	10.80	118	11.29	125	11.79	132	12.29	139	12.79	
	66	56.1	3.96	68.2	5.15	77.3	6.15	86.4	9.85	95.5	10.32	102	10.43	111	11.00	118	11.49	125	11.99	132	12.49	139	12.99	
	70	56.1	4.06	68.2	5.29	77.3	6.29	86.4	10.14	95.5	10.61	102	10.72	111	11.29	118	11.78	125	12.28	132	12.78	139	13.28	
	72	56.1	4.16	68.2	5.43	77.3	6.43	86.4	10.43	95.5	10.90	102	11.01	111	11.57	118	12.06	125	12.56	132	13.06	139	13.56	
	74	56.1	4.26	68.2	5.57	77.3	6.57	86.4	10.72	95.5	11.17	102	11.28	111	11.84	118	12.31	125	12.81	132	13.31	139	13.81	
	76	56.1	4.36	68.2	5.71	77.3	6.71	86.4	11.04	95.5	11.44	102	11.54	111	12.11	118	12.54	132	13.04	139	13.54			
	78	56.1	4.46	68.2	5.85	77.3	6.85	86.4	11.36	95.5	11.72	102	11.82	111	12.41	118	12.81	132	13.31	139	13.81			
70	50	56.1	4.51	68.2	5.87	77.3	7.01	86.4	11.68	95.5	12.15	102	12.25	111	12.94	118	13.44	125	13.94	132	14.44	139	14.94	
	54	56.1	4.61	68.2	6.01	77.3	7.11	86.4	11.99	95.5	12.43	102	12.53	111	13.23	118	13.73	125	14.23	132	14.73	139	15.23	
	58	56.1	4.71	68.2	6.15	77.3	7.21	86.4	12.30	95.5	12.71	102	12.81	111	13.51	118	14.01	125	14.51	132	15.01	139	15.51	
	62	56.1	4.81	68.2	6.29	77.3	7.31	86.4	12.61	95.5	13.02	102	13.12	111	13.82	118	14.32	125	14.82	132	15.32	139	15.82	
	66	56.1	4.91	68.2	6.43	77.3	7.41	86.4	12.92	95.5	13.33	102	13.43	111	14.13	118	14.63	125	15.13	132	15.63	139	16.13	
	70	56.1	5.01	68.2	6.57	77.3	7.51	86.4	13.23	95.5	13.64	102	13.74	111	14.44	118	14.94	125	15.44	132	15.94	139	16.44	
	72	56.1	5.11	68.2	6.71	77.3	7.61	86.4	13.54	95.5	13.95	102	14.05	111	14.75	118	15.25	125	15.75	132	16.25	139	16.75	
	74	56.1	5.21	68.2	6.85	77.3	7.71	86.4	13.85	95.5	14.26	102	14.36	111	15.06	118	15.56	125	16.06	132	16.56	139	17.06	
	76	56.1	5.31	68.2	7.00	77.3	7.90	86.4	14.16	95.5	14.57	102	14.67	111	15.37	118	15.87	125	16.37	132	16.87	139	17.37	
	78	56.1	5.41	68.2	7.14	77.3	8.04	86.4	14.47	95.5	14.88	102	14.98	111	15.68	118	16.18	125	16.68	132	17.18	139	17.68	
60	50	56.1	4.51	68.2	5.87	77.3	7.01	86.4	11.68	95.5	12.15	102	12.25	111	12.94	118	13.44	125	13.94	132	14.44	139	14.94	
	54	56.1	4.61	68.2	6.01	77.3	7.11	86.4	11.99	95.5	12.43	102	12.53	111	13.23	118	13.73	125	14.23	132	14.73	139	15.23	
	58	56.1	4.71	68.2	6.15	77.3	7.21	86.4	12.30	95.5	12.71	102	12.81	111	13.51	118	14.01	125	14.51	132	15.01	139	15.51	
	62	56.1	4.81	68.2	6.29	77.3	7.31	86.4	12.61	95.5	13.02	102	13.12	111	13.82	118	14.32	125	14.82	132	15.32	139	15.82	
	66	56.1	4.91	68.2	6.43	77.3	7.41	86.4	12.92	95.5	13.33	102	13.43	111	14.13	118	14.63	125	15.13	132	15.63	139	16.13	
	70	56.1	5.01	68.2	6.57	77.3	7.51	86.4	13.23	95.5	13.64	102	13.74	111	14.44	118	14.94	125	15.44	132	15.94	139	16.44	
	72	56.1	5.11	68.2	6.71	77.3	7.61	86.4	13.54	95.5	13.95	102	14.05	111	14.75	118	15.25	125	15.75	132	16.25	139	16.75	
	74	56.1	5.21	68.2	6.85	77.3	7.71	86.4	13.85	95.5	14.26	102	14.36	111	15.06	118	15.56	125	16.06	132	16.56	139	17.06	
	76	56.1	5.31	68.2	7.00	77.3	7.90	86.4	14.16	95.5	14.57	102	14.67	111	15.37	118	15.87	125	16.37	132	16.87	139	17.37	
	78	56.1	5.41	68.2	7.14	77.3	8.04	86.4	14.47	95.5	14.88	102	14.98	111	15.68	118	16.18	125	16.68	132	17.18	139	17.68	
50	50	56.1	4.51	68.2	5.87	77.3	7.01	86.4	11.68	95.5	12.15	102	12.25	111	12.94	118	13.44	125	13.94	132	14.44	139	14.94	
	54	56.1	4.61	68.2	6.01	77.3	7.11	86.4	11.99	95.5	12.43	102	12.53	111	13.23	118	13.73	125	14.23	132	14.73	139	15.23	
	58	56.1	4.71	68.2	6.15	77.3	7.21	86.4	12.30	95.5	12.71	102	12.81	111	13.51	118	14.01	125	14.51	132	15.01	139	15.51	
	62	56.1	4.81	68.2	6.29	77.3	7.31	86.4	12.61	95.5	13.02	102	13.12	111	13.82	118	14.32	125	14.82	132	15.32	139	15.82	
	66	56.1	4.91	68.2	6.43	77.3	7.41	86.4	12.92	95.5	13.33	102	13.43	111	14.13	118	14.63	125	15.13	132	15.63	139	16.13	
	70	56.1	5.01	68.2	6.57	77.3	7.51	86.4	13.23	95.5	13.64	102	13.74	111	14.44	118	14.94	125	15.44	132	15.94	139	16.44	
	72	56.1	5.11	68.2	6.71	77.3	7.61	86.4	13.54	95.5	13.95	102	14.05	111	14.75	118	15.25	125	15.75	132	16.25	139	16.75	
	74	56.1	5.21	68.2	6.85	77.3	7.71	86.4	13.85	95.5	14.26	102	14.36	111	15.06	118	15.56	125	16.06	132	16.56	139	17.06	
	76	56.1	5.31	68.2	7.00	77.3	7.90	86.4	14.16	95.5	14.57	102	14.67	111	15.37	118	15.87	125	16.37	132	16.87	139	17.37	
	78	56.1	5.41	68.2	7.14	77.3	8.04	86.4	14.47	95.5	14.88	102	14.98											

REYQ120PYDN

Outdoor air temp. °F/°C	Indoor air temp. °F/°C												Cooling capacity		
	64				70				76						
	TC	PI	MBH	KW	TC	PI	MBH	KW	TC	PI	MBH	KW			
90	50	70.1	3.23	85.2	3.97	96.8	4.56	108	5.17	119	5.80	127	6.22	138	6.87
	54	70.1	3.29	85.2	4.05	96.6	4.65	108	5.27	119	5.92	127	6.35	138	7.02
	58	70.1	3.32	85.2	4.21	96.6	4.75	108	5.40	119	6.04	127	6.48	138	7.17
	62	70.1	3.35	85.2	4.34	96.6	4.85	108	5.53	119	6.17	127	6.61	138	7.32
	66	70.1	3.49	85.2	4.50	96.6	4.95	108	5.62	119	6.32	127	6.80	138	7.45
	70	70.1	3.65	85.2	4.70	96.6	5.06	108	5.91	119	6.61	127	7.17	138	7.85
	72	70.1	3.69	85.2	4.74	96.6	5.08	108	5.94	119	6.65	127	7.21	138	7.89
	76	70.1	3.85	85.2	4.94	96.6	5.25	108	6.14	119	7.09	127	7.76	138	8.56
	78	70.1	3.96	85.2	5.04	96.6	5.35	108	6.25	119	7.20	127	7.87	138	8.67
	80	70.1	4.15	85.2	5.24	96.6	5.55	108	6.45	119	7.51	127	8.22	138	9.08
80	50	62.3	2.97	75.8	3.61	85.9	4.08	96.0	4.62	106	5.16	111	5.43	123	6.00
	54	62.3	2.98	75.8	3.67	85.9	4.16	96.0	4.71	106	5.25	111	5.55	123	6.12
	58	62.3	2.98	75.8	3.71	85.9	4.25	96.0	4.81	106	5.39	111	5.66	123	6.25
	62	62.3	3.03	75.8	3.79	85.9	4.34	96.0	4.91	106	5.51	111	5.79	123	6.38
	66	62.3	3.15	75.8	3.86	85.9	4.43	96.0	5.02	106	5.76	111	6.29	123	7.12
	70	62.3	3.29	75.8	4.01	85.9	4.59	96.0	5.21	106	5.98	111	6.53	123	7.44
	72	62.3	3.30	75.8	4.02	85.9	4.60	96.0	5.22	106	6.00	111	6.55	123	7.46
	76	62.3	3.40	75.8	4.32	85.9	5.09	96.0	5.92	106	6.82	111	7.45	123	8.45
	78	62.3	3.64	75.8	4.63	85.9	5.46	96.0	6.36	106	7.33	111	8.02	123	9.10
	80	62.3	3.89	75.8	4.96	85.9	5.86	96.0	6.73	106	7.88	111	8.62	123	9.79
70	50	54.5	2.57	66.3	3.04	75.2	3.54	84.0	3.98	92.8	4.36	98.7	4.76	108	5.25
	54	54.5	2.62	66.3	3.17	75.2	3.61	84.0	4.06	92.8	4.54	98.7	4.96	108	5.36
	58	54.5	2.66	66.3	3.23	75.2	3.68	84.0	4.15	92.8	4.63	98.7	5.07	108	5.48
	62	54.5	2.71	66.3	3.29	75.2	3.75	84.0	4.23	92.8	4.73	98.7	5.17	108	5.57
	66	54.5	2.76	66.3	3.36	75.2	3.83	84.0	4.33	92.8	4.84	98.7	5.21	108	5.67
	70	54.5	2.79	66.3	3.39	75.2	3.87	84.0	4.37	92.8	4.87	98.7	5.24	108	5.70
	72	54.5	2.83	66.3	3.44	75.2	3.92	84.0	4.40	92.8	4.90	98.7	5.27	108	5.73
	76	54.5	2.92	66.3	3.66	75.2	4.28	84.0	4.60	92.8	5.26	98.7	5.42	108	6.04
	78	54.5	3.12	66.3	3.92	75.2	4.59	84.0	5.30	92.8	6.07	98.7	6.02	108	6.48
	80	54.5	3.35	66.3	4.20	75.2	5.25	84.0	6.09	92.8	6.92	98.7	7.02	108	7.48
60	50	46.7	2.32	56.8	2.80	64.4	3.20	72.0	3.70	79.6	4.12	84.6	4.41	92.2	4.83
	54	46.7	2.32	56.8	2.86	64.4	3.29	72.0	3.78	79.6	4.20	84.6	4.49	92.2	4.91
	58	46.7	2.45	56.8	2.95	64.4	3.34	72.0	3.78	79.6	4.29	84.6	4.59	92.2	5.01
	62	46.7	2.49	56.8	3.06	64.4	3.54	72.0	4.05	79.6	4.60	84.6	4.89	92.2	5.21
	66	46.7	2.65	56.8	3.27	64.4	3.79	72.0	4.34	79.6	4.94	84.6	5.39	92.2	5.60
	70	46.7	2.82	56.8	3.49	64.4	4.05	72.0	4.65	79.6	5.29	84.6	5.74	92.2	6.02
	72	46.7	2.82	56.8	3.49	64.4	4.05	72.0	4.65	79.6	5.29	84.6	5.74	92.2	6.02
	76	46.7	3.00	56.8	3.73	64.4	4.33	72.0	4.97	79.6	5.66	84.6	6.15	92.2	6.46
	78	46.7	3.19	56.8	3.97	64.4	4.62	72.0	5.31	79.6	6.06	84.6	6.59	92.2	6.92
	80	46.7	3.39	56.8	4.23	64.4	4.95	72.0	5.68	79.6	6.48	84.6	7.05	92.2	7.42
50	50	38.9	1.90	47.4	2.24	53.7	2.63	60.0	3.10	66.3	3.63	70.5	3.95	76.9	4.34
	54	38.9	1.93	47.4	2.27	53.7	2.64	60.0	3.11	66.3	3.63	70.5	3.95	76.9	4.34
	58	38.9	1.96	47.4	2.30	53.7	2.68	60.0	3.17	66.3	3.71	70.5	3.97	76.9	4.37
	62	38.9	1.99	47.4	2.34	53.7	2.72	60.0	3.23	66.3	3.79	70.5	3.99	76.9	4.40
	66	38.9	2.02	47.4	2.38	53.7	2.76	60.0	3.29	66.3	3.86	70.5	4.06	76.9	4.47
	70	38.9	2.05	47.4	2.42	53.7	2.79	60.0	3.33	66.3	3.90	70.5	4.09	76.9	4.50
	72	38.9	2.09	47.4	2.44	53.7	2.79	60.0	3.33	66.3	3.90	70.5	4.09	76.9	4.50
	76	38.9	2.13	47.4	2.52	53.7	2.88	60.0	3.46	66.3	4.14	70.5	4.26	76.9	4.60
	78	38.9	2.15	47.4	2.56	53.7	2.92	60.0	3.50	66.3	4.20	70.5	4.30	76.9	4.64
	80	38.9	2.18	47.4	2.61	53.7	2.98	60.0	3.57	66.3	4.29	70.5	4.39	76.9	4.73

TC : Total capacity ; MBH
 PI : Power Input ; kW (Comp.+Outdoor fan motor)
 Note1 : The above table shows the average value of conditions which may occur.

REYQ144PYDN

Cooling capacity	Outdoor air temp. °F/°C	Indoor air temp. °F/°C																				
		57			61			64			70			72			75					
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH			
90	50	84.1	3.20	102	3.93	116	4.51	130	5.12	143	5.74	152	6.17	166	6.81	176	7.28	185	7.62	191	7.84	194
	54	84.1	3.26	102	4.01	116	4.61	130	5.22	143	5.86	152	6.30	166	6.95	176	7.40	185	7.76	192	7.98	199
	58	84.1	3.30	102	4.08	116	4.68	130	5.46	143	6.11	152	6.55	166	7.20	176	7.66	185	8.02	191	8.24	195
	62	84.1	3.35	102	4.16	116	4.76	130	5.74	143	6.37	152	6.76	166	7.40	176	7.86	185	8.22	191	8.44	197
	66	84.1	3.40	102	4.24	116	4.84	130	5.92	143	6.53	152	6.95	166	7.58	176	8.04	185	8.40	191	8.62	198
	70	84.1	3.45	102	4.32	116	4.91	130	6.10	143	6.70	152	7.12	166	7.74	176	8.20	185	8.56	191	8.78	200
	72	84.1	3.50	102	4.40	116	5.00	130	6.28	143	6.88	152	7.30	166	7.94	176	8.40	185	8.76	191	8.98	202
	74	84.1	3.55	102	4.48	116	5.08	130	6.46	143	7.06	152	7.48	166	8.12	176	8.64	185	8.92	191	9.14	204
	76	84.1	3.60	102	4.56	116	5.16	130	6.64	143	7.24	152	7.64	166	8.30	176	8.80	185	9.16	191	9.38	206
	78	84.1	3.65	102	4.64	116	5.24	130	6.82	143	7.42	152	7.82	166	8.46	176	8.96	185	9.32	191	9.56	208
	80	84.1	3.70	102	4.72	116	5.32	130	7.00	143	7.60	152	8.00	166	8.60	176	9.12	185	9.48	191	9.72	210
	80	50	84.1	2.85	102	3.57	116	4.15	130	4.73	143	5.31	152	5.89	166	6.45	176	6.91	185	7.28	191	7.50
54		84.1	2.90	102	3.64	116	4.24	130	4.91	143	5.49	152	6.05	166	6.61	176	7.07	185	7.44	191	7.66	199
58		84.1	2.95	102	3.72	116	4.32	130	5.09	143	5.67	152	6.21	166	6.73	176	7.20	185	7.56	191	7.78	200
62		84.1	3.00	102	3.80	116	4.40	130	5.27	143	5.85	152	6.37	166	6.89	176	7.36	185	7.72	191	7.94	202
66		84.1	3.05	102	3.88	116	4.48	130	5.45	143	6.03	152	6.55	166	7.01	176	7.44	185	7.80	191	8.02	204
70		84.1	3.10	102	3.96	116	4.56	130	5.63	143	6.21	152	6.73	166	7.21	176	7.62	185	7.98	191	8.20	206
72		84.1	3.15	102	4.04	116	4.64	130	5.81	143	6.39	152	6.91	166	7.39	176	7.80	185	8.06	191	8.38	208
74		84.1	3.20	102	4.12	116	4.72	130	5.99	143	6.57	152	7.09	166	7.57	176	7.98	185	8.26	191	8.56	210
76		84.1	3.25	102	4.20	116	4.80	130	6.17	143	6.75	152	7.27	166	7.75	176	8.14	185	8.44	191	8.74	212
78		84.1	3.30	102	4.28	116	4.88	130	6.35	143	6.93	152	7.45	166	7.93	176	8.32	185	8.62	191	8.92	214
80		84.1	3.35	102	4.36	116	4.96	130	6.53	143	7.11	152	7.63	166	8.10	176	8.50	185	8.80	191	9.00	216
70		50	84.1	2.51	102	3.18	116	3.76	130	4.34	143	4.92	152	5.49	166	6.05	176	6.61	185	7.07	191	7.29
	54	84.1	2.56	102	3.26	116	3.84	130	4.52	143	5.12	152	5.67	166	6.23	176	6.79	185	7.25	191	7.47	199
	58	84.1	2.61	102	3.34	116	3.92	130	4.70	143	5.30	152	5.85	166	6.41	176	6.97	185	7.43	191	7.65	200
	62	84.1	2.66	102	3.42	116	4.00	130	4.88	143	5.48	152	6.03	166	6.53	176	7.09	185	7.51	191	7.83	202
	66	84.1	2.71	102	3.50	116	4.08	130	5.06	143	5.66	152	6.15	166	6.65	176	7.17	185	7.59	191	7.95	204
	70	84.1	2.76	102	3.58	116	4.16	130	5.24	143	5.84	152	6.33	166	6.77	176	7.29	185	7.77	191	8.07	206
	72	84.1	2.81	102	3.66	116	4.24	130	5.42	143	6.02	152	6.51	166	6.89	176	7.41	185	7.89	191	8.19	208
	74	84.1	2.86	102	3.74	116	4.32	130	5.60	143	6.20	152	6.69	166	7.01	176	7.53	185	8.01	191	8.31	210
	76	84.1	2.91	102	3.82	116	4.40	130	5.78	143	6.38	152	6.87	166	7.13	176	7.65	185	8.13	191	8.43	212
	78	84.1	2.96	102	3.90	116	4.48	130	5.96	143	6.56	152	7.05	166	7.25	176	7.77	185	8.25	191	8.55	214
	80	84.1	3.01	102	3.98	116	4.56	130	6.14	143	6.74	152	7.23	166	7.37	176	7.89	185	8.37	191	8.67	216
	60	50	84.1	2.19	102	2.82	116	3.40	130	3.98	143	4.56	152	5.13	166	5.69	176	6.25	185	6.71	191	6.93
54		84.1	2.24	102	2.90	116	3.48	130	4.16	143	4.74	152	5.31	166	5.81	176	6.37	185	6.83	191	7.05	199
58		84.1	2.29	102	2.98	116	3.56	130	4.34	143	4.92	152	5.43	166	5.93	176	6.49	185	6.95	191	7.17	200
62		84.1	2.34	102	3.06	116	3.64	130	4.52	143	5.10	152	5.52	166	6.05	176	6.61	185	7.07	191	7.29	202
66		84.1	2.39	102	3.14	116	3.72	130	4.70	143	5.28	152	5.61	166	6.17	176	6.73	185	7.19	191	7.41	204
70		84.1	2.44	102	3.22	116	3.80	130	4.88	143	5.46	152	5.73	166	6.33	176	6.89	185	7.31	191	7.53	206
72		84.1	2.49	102	3.30	116	3.88	130	5.06	143	5.64	152	5.85	166	6.49	176	7.01	185	7.43	191	7.65	208
74		84.1	2.54	102	3.38	116	3.96	130	5.24	143	5.82	152	6.03	166	6.65	176	7.17	185	7.55	191	7.77	210
76		84.1	2.59	102	3.46	116	4.04	130	5.42	143	6.00	152	6.21	166	6.81	176	7.31	185	7.67	191	7.89	212
78		84.1	2.64	102	3.54	116	4.12	130	5.60	143	6.18	152	6.39	166	6.97	176	7.45	185	7.79	191	8.01	214
80		84.1	2.69	102	3.62	116	4.20	130	5.78	143	6.36	152	6.57	166	7.13	176	7.59	185	7.91	191	8.13	216
50		50	84.1	1.87	102	2.50	116	3.08	130	3.66	143	4.24	152	4.81	166	5.39	176	5.97	185	6.49	191	6.71
	54	84.1	1.92	102	2.58	116	3.16	130	3.84	143	4.42	152	5.05	166	5.57	176	6.15	185	6.63	191	6.85	199
	58	84.1	1.97	102	2.66	116	3.24	130	4.02	143	4.60	152	5.23	166	5.75	176	6.33	185	6.77	191	6.97	200
	62	84.1	2.02	102	2.74	116	3.32	130	4.20	143	4.78	152	5.41	166	5.93	176	6.51	185	6.99	191	7.19	202
	66	84.1	2.07	102	2.82	116	3.40	130	4.38	143	4.96	152	5.59	166	6.09	176	6.69	185	7.21	191	7.41	204
	70	84.1	2.12	102	2.90	116	3.48	130	4.56	143	5.14	152	5.77	166	6.27	176	6.87	185	7.43	191	7.63	206
	72	84.1	2.17	102	2.98	116	3.56	130	4.74	143	5.32	152	5.95	166	6.45	176	7.01	185	7.65	191	7.85	208
	74	84.1	2.22	102	3.06	116	3.64	130	4.92	143	5.50	152	6.13	166	6.63	176	7.19	185	7.87	191	8.07	210
	76	84.1	2.27	102	3.14	116	3.72	130	5.10	143	5.68	152	6.31	166	6.81	176	7.37	185	8.09	191	8.29	212
	78	84.1	2.32	102	3.22	116	3.80	130	5.28	143	5.86	152	6.49	166	6.99	176	7.55	185	8.11	191	8.51	214
	80	84.1	2.37	102	3.30	116	3.88	130	5.46	143	6.04	152	6.67	166	7.13	176	7.73	185	8.13	191	8.73	216

TC : Total capacity ; MBH

REYQ216PYDN

Combi- nation (%)	Outdoor air temp. (F/DB)	Indoor air temp. F/WB												Cooling capacity				
		57			61			64			70			72		75		
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	TC	PI	
90	50	126	5.78	153	7.10	174	8.15	194	9.24	215	10.4	229	11.1	249	12.3	261	13.1	
	54	126	5.88	153	7.24	174	8.32	194	9.43	215	10.6	229	11.4	249	12.6	261	13.4	
	58	126	6.01	153	7.38	174	8.47	194	9.61	215	10.8	229	11.6	249	12.8	261	13.6	
	62	126	6.15	153	7.52	174	8.61	194	9.75	215	11.0	229	11.8	249	13.0	261	13.8	
	66	126	6.29	153	7.66	174	8.75	194	9.89	215	11.2	229	12.0	249	13.2	261	14.0	
	70	126	6.43	153	7.80	174	8.89	194	10.03	215	11.4	229	12.2	249	13.4	261	14.2	
	72	126	6.57	153	7.94	174	9.03	194	10.17	215	11.6	229	12.4	249	13.6	261	14.4	
	76	126	6.71	153	8.08	174	9.17	194	10.31	215	11.8	229	12.6	249	13.8	261	14.6	
	80	126	6.85	153	8.22	174	9.31	194	10.45	215	12.0	229	12.8	249	14.0	261	14.8	
	84	126	6.99	153	8.36	174	9.45	194	10.59	215	12.2	229	13.0	249	14.2	261	15.0	
80	50	112	5.14	136	6.26	155	7.16	173	8.09	191	9.06	203	9.72	221	10.7	231	11.4	
	54	112	5.23	136	6.31	155	7.30	173	8.26	191	9.25	203	9.91	221	11.0	231	11.7	
	58	112	5.32	136	6.36	155	7.45	173	8.43	191	9.44	203	10.1	221	11.2	231	12.0	
	62	112	5.42	136	6.41	155	7.60	173	8.61	191	9.64	203	10.3	221	11.4	231	12.2	
	66	112	5.53	136	6.47	155	7.76	173	8.79	191	9.86	203	10.6	221	11.8	231	12.6	
	70	112	5.63	136	6.53	155	7.93	173	8.99	191	10.3	203	11.2	221	12.2	231	13.2	
	72	112	5.73	136	6.59	155	8.10	173	9.21	191	10.7	203	11.8	221	12.8	231	13.8	
	76	112	5.83	136	6.65	155	8.27	173	9.43	191	11.1	203	12.4	221	13.4	231	14.4	
	80	112	5.93	136	6.71	155	8.44	173	9.65	191	11.5	203	13.0	221	14.0	231	15.0	
	84	112	6.03	136	6.77	155	8.61	173	9.87	191	11.9	203	13.6	221	14.6	231	15.6	
70	50	98.1	4.53	119	5.65	135	6.57	151	7.52	167	8.50	178	9.49	194	10.5	209	21.1	
	54	98.1	4.63	119	5.70	135	6.62	151	7.57	167	8.55	178	9.54	194	10.6	209	21.2	
	58	98.1	4.73	119	5.75	135	6.67	151	7.62	167	8.60	178	9.59	194	10.7	209	21.3	
	62	98.1	4.83	119	5.80	135	6.72	151	7.67	167	8.65	178	9.64	194	10.8	209	21.4	
	66	98.1	4.93	119	5.85	135	6.77	151	7.72	167	8.70	178	9.69	194	10.9	209	21.5	
	70	98.1	5.03	119	5.90	135	6.82	151	7.77	167	8.75	178	9.74	194	11.0	209	21.6	
	72	98.1	5.13	119	5.95	135	6.87	151	7.82	167	8.80	178	9.79	194	11.1	209	21.7	
	76	98.1	5.23	119	6.00	135	6.92	151	7.87	167	8.85	178	9.84	194	11.2	209	21.8	
	80	98.1	5.33	119	6.05	135	6.97	151	7.92	167	8.90	178	9.89	194	11.3	209	21.9	
	84	98.1	5.43	119	6.10	135	7.02	151	7.97	167	8.95	178	9.94	194	11.4	209	22.0	
60	50	84.1	3.85	102	4.71	116	5.31	130	5.94	143	6.60	152	7.05	166	7.74	174	8.18	
	54	84.1	3.95	102	4.76	116	5.36	130	6.00	143	6.66	152	7.11	166	7.80	174	8.24	
	58	84.1	4.05	102	4.81	116	5.41	130	6.06	143	6.72	152	7.17	166	7.86	174	8.30	
	62	84.1	4.15	102	4.86	116	5.46	130	6.12	143	6.78	152	7.23	166	7.92	174	8.36	
	66	84.1	4.25	102	4.91	116	5.51	130	6.18	143	6.84	152	7.29	166	7.98	174	8.42	
	70	84.1	4.35	102	4.96	116	5.56	130	6.24	143	6.90	152	7.35	166	8.04	174	8.48	
	72	84.1	4.45	102	5.01	116	5.61	130	6.30	143	6.96	152	7.41	166	8.10	174	8.54	
	76	84.1	4.55	102	5.06	116	5.66	130	6.36	143	7.02	152	7.47	166	8.16	174	8.60	
	80	84.1	4.65	102	5.11	116	5.71	130	6.42	143	7.08	152	7.53	166	8.22	174	8.66	
	84	84.1	4.75	102	5.16	116	5.76	130	6.48	143	7.14	152	7.59	166	8.28	174	8.72	
50	50	70.1	3.40	85.2	4.19	96.6	4.56	108	5.04	119	5.56	127	5.92	138	6.36	148	6.80	
	54	70.1	3.45	85.2	4.24	96.6	4.61	108	5.09	119	5.61	127	5.97	138	6.41	148	6.91	
	58	70.1	3.50	85.2	4.29	96.6	4.66	108	5.14	119	5.66	127	6.02	138	6.52	148	7.02	
	62	70.1	3.55	85.2	4.34	96.6	4.71	108	5.19	119	5.71	127	6.07	138	6.63	148	7.13	
	66	70.1	3.60	85.2	4.39	96.6	4.76	108	5.24	119	5.76	127	6.12	138	6.74	148	7.24	
	70	70.1	3.65	85.2	4.44	96.6	4.81	108	5.29	119	5.81	127	6.17	138	6.85	148	7.35	
	72	70.1	3.70	85.2	4.49	96.6	4.86	108	5.34	119	5.86	127	6.22	138	6.96	148	7.46	
	76	70.1	3.75	85.2	4.54	96.6	4.91	108	5.39	119	5.91	127	6.27	138	7.07	148	7.57	
	80	70.1	3.80	85.2	4.59	96.6	4.96	108	5.44	119	5.96	127	6.32	138	7.18	148	7.68	
	84	70.1	3.85	85.2	4.64	96.6	5.01	108	5.49	119	6.01	127	6.37	138	7.29	148	7.79	

TC : Total capacity ; MBH
 PI : Power Input ; kW (Comp.+Outdoor fan motor)
 Note1 : The above table shows the average value of conditions which may occur.

Heating capacity

Combi-radiation (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB												
		61			65			70			75			
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	
70	-3.64	-4.0	56.7	6.19	53.1	5.73	50.4	5.39	48.6	5.17	46.8	4.95	44.1	4.62
	-1.84	-2.2	56.7	6.15	53.1	5.69	50.4	5.35	48.6	5.13	46.8	4.91	44.1	4.59
	0.5	5.0	56.7	5.91	53.1	5.47	50.4	5.15	48.6	4.94	46.8	4.73	44.1	4.43
	3.5	8.5	56.7	5.67	53.1	5.34	50.4	5.03	48.6	4.82	46.8	4.62	44.1	4.32
	15.0	14.0	56.7	5.51	53.1	5.10	50.4	4.81	46.8	4.61	46.8	4.42	44.1	4.14
	17.0	15.5	56.7	5.43	53.1	5.04	50.4	4.74	46.8	4.55	46.8	4.37	44.1	4.09
	19.0	18.0	56.7	5.30	53.1	4.92	50.4	4.63	46.8	4.45	46.8	4.27	44.1	4.00
	22.0	20.0	56.7	5.20	53.1	4.82	50.4	4.54	46.8	4.36	46.8	4.18	44.1	3.92
	26.0	24.0	56.7	4.98	53.1	4.62	50.4	4.36	46.8	4.19	46.8	4.02	44.1	3.77
	30.0	28.0	56.7	4.76	53.1	4.42	50.4	4.17	46.8	4.01	46.8	3.85	44.1	3.61
	35.0	32.0	56.7	4.54	53.1	4.22	50.4	3.99	46.8	3.83	46.8	3.68	44.1	3.46
	39.0	36.0	56.7	4.33	53.1	4.02	50.4	3.80	46.8	3.66	46.8	3.51	44.1	3.30
44.0	40.0	56.7	4.11	53.1	3.83	50.4	3.62	46.8	3.49	46.8	3.35	44.1	3.05	
47.0	45.0	56.7	3.96	53.1	3.68	50.4	3.47	46.8	3.34	46.8	3.20	44.1	2.90	
51.0	47.0	56.7	3.76	53.1	3.51	50.4	3.29	46.8	3.20	46.8	3.08	44.1	2.74	
54.0	50.0	56.7	3.62	53.1	3.38	50.4	3.20	46.8	3.09	46.8	2.97	44.1	2.69	
57.0	53.0	56.7	3.49	53.1	3.26	50.4	3.09	46.8	2.97	46.8	2.86	44.1	2.60	
60.0	56.0	56.7	3.35	53.1	3.14	50.4	2.97	46.8	2.87	46.8	2.76	44.1	2.61	
60	-3.64	-4.0	47.2	5.00	44.2	4.64	42.0	4.38	40.5	4.20	39.0	4.03	36.8	3.78
	-1.84	-2.2	47.2	4.97	44.2	4.61	42.0	4.35	40.5	4.18	39.0	4.01	36.8	3.76
	0.5	5.0	47.2	4.78	44.2	4.44	42.0	4.19	40.5	4.03	39.0	3.87	36.8	3.63
	3.5	8.5	47.2	4.67	44.2	4.34	42.0	4.10	40.5	3.94	39.0	3.78	36.8	3.55
	13.0	12.0	47.2	4.55	44.2	4.23	42.0	3.99	40.5	3.90	39.0	3.80	36.8	3.46
	17.0	15.5	47.2	4.41	44.2	4.11	42.0	3.88	40.5	3.81	39.0	3.68	36.8	3.36
	19.0	18.0	47.2	4.31	44.2	4.01	42.0	3.79	40.5	3.75	39.0	3.58	36.8	3.29
	22.0	20.0	47.2	4.23	44.2	3.94	42.0	3.72	40.5	3.68	39.0	3.44	36.8	3.23
	26.0	24.0	47.2	4.06	44.2	3.78	42.0	3.58	40.5	3.44	39.0	3.31	36.8	3.11
	30.0	28.0	47.2	3.89	44.2	3.63	42.0	3.43	40.5	3.30	39.0	3.18	36.8	2.99
	35.0	32.0	47.2	3.72	44.2	3.47	42.0	3.29	40.5	3.16	39.0	3.05	36.8	2.87
	39.0	36.0	47.2	3.55	44.2	3.31	42.0	3.14	40.5	3.03	39.0	2.91	36.8	2.75
44.0	40.0	47.2	3.39	44.2	3.16	42.0	3.00	40.5	2.89	39.0	2.79	36.8	2.63	
47.0	45.0	47.2	3.27	44.2	3.05	42.0	2.90	40.5	2.81	39.0	2.69	36.8	2.54	
51.0	47.0	47.2	3.11	44.2	2.88	42.0	2.74	40.5	2.66	39.0	2.56	36.8	2.46	
54.0	50.0	47.2	3.00	44.2	2.81	42.0	2.67	40.5	2.58	39.0	2.48	36.8	2.36	
57.0	53.0	47.2	2.89	44.2	2.71	42.0	2.58	40.5	2.49	39.0	2.40	36.8	2.27	
60.0	56.0	47.2	2.79	44.2	2.62	42.0	2.49	40.5	2.40	39.0	2.32	36.8	2.20	

TC : Total capacity ; MBH
 PI : Power Input ; kW (Comp.+Outdoor fan motor)
 Note1 : is shown as reference
 When selecting the unit models, avoid the Outdoor air temperature range shown by

REYQ96PYDN

Combit-nation (%)	Outdoor air temp. (F/DB)	Indoor air temp. F/DB												Heating capacity				
		61			65			70			75			TC	PI			
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH					
100	-3.64	73.0	7.26	7.84	7.23	8.22	72.3	8.63	72.0	9.14	71.2	10.4	71.2	10.7	71.2	10.7	71.2	10.7
	-1.84	74.3	7.41	8.08	7.33	8.35	73.5	8.75	73.0	9.36	72.0	10.4	72.0	10.7	72.0	10.7	72.0	10.7
	0.5	75.6	7.03	7.70	7.03	8.05	74.8	8.90	74.3	9.51	73.0	10.4	73.0	10.7	73.0	10.7	73.0	10.7
	9.5	76.9	6.65	7.32	6.65	7.67	76.1	9.05	75.6	9.66	74.3	10.4	74.3	10.7	74.3	10.7	74.3	10.7
	13.0	78.2	6.30	6.97	6.30	7.41	77.4	9.20	77.0	9.81	75.6	10.4	75.6	10.7	75.6	10.7	75.6	10.7
	16.5	79.5	5.95	6.62	5.95	7.03	78.6	9.35	78.2	9.96	77.0	10.4	77.0	10.7	77.0	10.7	77.0	10.7
	20.0	80.8	5.60	6.27	5.60	6.78	79.7	9.50	79.3	10.11	78.2	10.4	78.2	10.7	78.2	10.7	78.2	10.7
	23.5	82.1	5.25	5.92	5.25	6.43	80.8	9.65	80.4	10.26	79.3	10.4	79.3	10.7	79.3	10.7	79.3	10.7
	27.0	83.4	4.90	5.57	4.90	6.04	81.9	9.80	81.5	10.41	80.4	10.4	80.4	10.7	80.4	10.7	80.4	10.7
	30.5	84.7	4.55	5.22	4.55	5.63	83.0	9.95	82.6	10.56	81.5	10.4	81.5	10.7	81.5	10.7	81.5	10.7
	34.0	86.0	4.20	4.87	4.20	5.22	84.1	10.10	83.7	10.71	82.6	10.4	82.6	10.7	82.6	10.7	82.6	10.7
	37.5	87.3	3.85	4.52	3.85	4.81	85.2	10.25	84.8	10.86	83.7	10.4	83.7	10.7	83.7	10.7	83.7	10.7
	41.0	88.6	3.50	4.17	3.50	4.40	86.3	10.40	85.9	11.01	84.8	10.4	84.8	10.7	84.8	10.7	84.8	10.7
	44.5	89.9	3.15	3.82	3.15	4.05	87.4	10.55	87.0	11.16	85.9	10.4	85.9	10.7	85.9	10.7	85.9	10.7
	48.0	91.2	2.80	3.47	2.80	3.68	88.5	10.70	88.1	11.31	87.0	10.4	87.0	10.7	87.0	10.7	87.0	10.7
	51.5	92.5	2.45	3.12	2.45	3.33	89.6	10.85	89.2	11.46	88.1	10.4	88.1	10.7	88.1	10.7	88.1	10.7
	55.0	93.8	2.10	2.77	2.10	2.98	90.7	11.00	90.3	11.61	89.2	10.4	89.2	10.7	89.2	10.7	89.2	10.7
	58.5	95.1	1.75	2.42	1.75	2.63	91.8	11.15	91.4	11.76	90.3	10.4	90.3	10.7	90.3	10.7	90.3	10.7
	62.0	96.4	1.40	2.07	1.40	2.28	92.9	11.30	92.5	11.91	91.4	10.4	91.4	10.7	91.4	10.7	91.4	10.7
	65.5	97.7	1.05	1.72	1.05	1.93	94.0	11.45	93.6	12.06	92.5	10.4	92.5	10.7	92.5	10.7	92.5	10.7
	69.0	99.0	0.70	1.37	0.70	1.58	95.1	11.60	94.7	12.21	93.6	10.4	93.6	10.7	93.6	10.7	93.6	10.7
	72.5	100.3	0.35	1.02	0.35	1.23	96.2	11.75	95.8	12.36	94.7	10.4	94.7	10.7	94.7	10.7	94.7	10.7
	76.0	101.6	0.00	0.67	0.00	0.88	97.3	11.90	96.9	12.51	95.8	10.4	95.8	10.7	95.8	10.7	95.8	10.7
	79.5	102.9	-0.35	0.32	-0.35	0.47	98.4	12.05	98.0	12.66	96.9	10.4	96.9	10.7	96.9	10.7	96.9	10.7
	83.0	104.2	-0.70	-0.03	-0.70	0.12	99.5	12.20	99.1	12.81	98.0	10.4	98.0	10.7	98.0	10.7	98.0	10.7
	86.5	105.5	-0.95	-0.38	-0.95	0.27	100.6	12.35	100.2	12.96	99.1	10.4	99.1	10.7	99.1	10.7	99.1	10.7
	90.0	106.8	-1.30	-0.72	-1.30	0.42	101.7	12.50	101.3	13.11	100.2	10.4	100.2	10.7	100.2	10.7	100.2	10.7
	93.5	108.1	-1.65	-1.07	-1.65	0.57	102.8	12.65	102.4	13.26	101.3	10.4	101.3	10.7	101.3	10.7	101.3	10.7
	97.0	109.4	-2.00	-1.42	-2.00	0.72	103.9	12.80	103.5	13.41	102.4	10.4	102.4	10.7	102.4	10.7	102.4	10.7
	100.5	110.7	-2.35	-1.77	-2.35	0.87	105.0	12.95	104.6	13.56	103.5	10.4	103.5	10.7	103.5	10.7	103.5	10.7

Combit-nation (%)	Outdoor air temp. (F/DB)	Indoor air temp. F/DB												Heating capacity				
		61			65			70			75			TC	PI			
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH					
130	-3.64	73.0	7.26	7.84	7.23	8.22	72.3	8.63	72.0	9.14	71.2	10.4	71.2	10.7	71.2	10.7	71.2	10.7
	-1.84	74.3	7.41	8.08	7.33	8.35	73.5	8.75	73.0	9.36	72.0	10.4	72.0	10.7	72.0	10.7	72.0	10.7
	0.5	75.6	7.03	7.70	7.03	8.05	74.8	8.90	74.3	9.51	73.0	10.4	73.0	10.7	73.0	10.7	73.0	10.7
	9.5	76.9	6.65	7.32	6.65	7.67	76.1	9.05	75.6	9.66	74.3	10.4	74.3	10.7	74.3	10.7	74.3	10.7
	13.0	78.2	6.30	6.97	6.30	7.41	77.4	9.20	77.0	9.81	75.6	10.4	75.6	10.7	75.6	10.7	75.6	10.7
	16.5	79.5	5.95	6.62	5.95	7.03	78.6	9.35	78.2	9.96	77.0	10.4	77.0	10.7	77.0	10.7	77.0	10.7
	20.0	80.8	5.60	6.27	5.60	6.78	79.7	9.50	79.3	10.11	78.2	10.4	78.2	10.7	78.2	10.7	78.2	10.7
	23.5	82.1	5.25	5.92	5.25	6.43	80.8	9.65	80.4	10.26	79.3	10.4	79.3	10.7	79.3	10.7	79.3	10.7
	27.0	83.4	4.90	5.57	4.90	6.04	81.9	9.80	81.5	10.41	80.4	10.4	80.4	10.7	80.4	10.7	80.4	10.7
	30.5	84.7	4.55	5.22	4.55	5.63	83.0	9.95	82.6	10.56	81.5	10.4	81.5	10.7	81.5	10.7	81.5	10.7
	34.0	86.0	4.20	4.87	4.20	5.22	84.1	10.10	83.7	10.71	82.6	10.4	82.6	10.7	82.6	10.7	82.6	10.7
	37.5	87.3	3.85	4.52	3.85	4.40	85.2	10.25	84.8	10.86	83.7	10.4	83.7	10.7	83.7	10.7	83.7	10.7
	41.0	88.6	3.50	4.17	3.50	4.05	86.3	10.40	85.9	11.01	84.8	10.4	84.8	10.7	84.8	10.7	84.8	10.7
	44.5	89.9	3.15	3.82	3.15	3.68	87.4	10.55	87.0	11.16	85.9	10.4	85.9	10.7	85.9	10.7	85.9	10.7
	48.0	91.2	2.80	3.47	2.80	3.33	88.5	10.70	88.1	11.31	87.0	10.4	87.0	10.7	87.0	10.7	87.0	10.7
	51.5	92.5	2.45	3.12	2.45	2.98	89.6	10.85	89.2	11.46	88.1	10.4	88.1	10.7	88.1	10.7	88.1	10.7
	55.0	93.8	2.10	2.77	2.10	2.63	90.7	11.00	90.3	11.61	89.2	10.4	89.2	10.7	89.2	10.7	89.2	10.7
	58.5	95.1	1.75	2.42	1.75	2.28	91.8	11.15	91.4	11.76	90.3	10.4	90.3	10.7	90.3	10.7	90.3	10.7
	62.0	96.4	1.40	2.07	1.40	1.93	92.9	11.30	92.5	11.91	91.4	10.4	91.4	10.7	91.4	10.7	91.4	10.7
	65.5	97.7	1.05	1.72	1.05	1.58	94.0	11.45	93.6	12.06	92.5	10.4	92.5	10.7	92.5	10.7	92.5	10.7
	69.0	99.0	0.70	1.37	0.70	1.23	95.1	11.60	94.7	12.21	93.6	10.4	93.6	10.7	93.6	10.7	93.6	10.7
	72.5	100.3	0.35	1.02	0.35	0.88	96.2	11.75	95.8	12.36	94.7	10.4	94.7	10.7	94.7	10.7	94.7	10.7
	76.0	101.6	0.00	0.67	0.00	0.47	97.3	11.90	96.9	12.51	95.8	10.4	95.8	10.7	95.8	10.7	95.8	10.7
	79.5	102.9	-0.35	0.32	-0.35	0.12	98.4	12.05	98.0	12.66	96.9	10.4	96.9	10.7	96.9	10.7	96.9	10.7
	83.0	104.2	-0.70	-0.03	-0.70	0.27	99.5	12.20	99.1	12.81	98.0	10.4	98.0	10.7	98.0	10.7	98.0	10.7
	86.5	105.5	-0.95	-0.38	-0.95	0.42	100.6	12.35	100.2	12.96	99.1	10.4	99.1	10.7	99.1	10.7	99.1	10.7
	90.0	106.8	-1.30	-0.72	-1.30	0.57	101.7	12.50	101.3	13.11	100.2	10.4	100.2	10.7	100.2	10.7	100.2	10.7
	93.5	108.1	-1.65	-1.07	-1.65	0.72	102.8	12.65	102.4	13.26	101.3	10.4	101.3	10.7	101.3	10.7	101.3	10.7
	97.0	109.4	-2.00	-1.42	-2.00	0.87	103.9	12.80	103.5	13.41	102.4	10.4	102.4	10.7	102.4	10.7	102.4	10.7
	100.5	110.7	-2.35	-1.77	-2.35	1.02	105.0	12.95	104.6	13.56	103.5	10.4	103.5	10.7	103.5	10.7	103.5	10.7

Heating capacity

Comb- ration (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB																	
		61			65			68			70			72			75		
		TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW		
70	-3.64	-4.0	71.2	10.7	71.0	11.0	70.9	11.2	70.8	11.3	70.7	11.5	68.8	11.2	68.8	11.2	68.8	10.9	
	-1.84	-2.2	72.4	10.8	72.3	11.1	72.1	11.3	72.1	11.4	72.0	11.6	70.0	11.2	70.0	11.2	69.6	10.9	
	0.5	0.5	81.7	11.1	81.2	11.6	81.1	11.6	81.0	11.6	80.9	11.6	78.0	11.5	78.0	11.5	77.6	11.5	
	13.0	12.0	85.4	11.5	82.6	11.1	82.6	11.1	82.6	11.1	82.6	11.1	80.4	11.1	80.4	11.1	79.5	11.1	
	15.0	14.0	87.7	11.6	82.6	10.8	82.6	10.8	82.6	10.8	82.6	10.8	80.4	10.8	80.4	10.8	79.5	10.8	
	17.0	15.5	88.2	11.4	82.6	10.5	82.6	10.5	82.6	10.5	82.6	10.5	80.4	10.5	80.4	10.5	79.5	10.5	
	19.0	18.0	88.2	10.9	82.6	10.1	82.6	10.1	82.6	10.1	82.6	10.1	80.4	10.1	80.4	10.1	79.5	10.1	
	22.0	20.0	88.2	10.5	82.6	9.72	82.6	9.72	82.6	9.72	82.6	9.72	80.4	9.72	80.4	9.72	79.5	9.72	
	26.0	24.0	88.2	9.82	82.6	9.07	82.6	9.07	82.6	9.07	82.6	9.07	80.4	9.07	80.4	9.07	79.5	9.07	
	30.0	28.0	88.2	9.15	82.6	8.46	82.6	8.46	82.6	8.46	82.6	8.46	80.4	8.46	80.4	8.46	79.5	8.46	
	35.0	32.0	88.2	8.52	82.6	7.89	82.6	7.89	82.6	7.89	82.6	7.89	80.4	7.89	80.4	7.89	79.5	7.89	
	40.0	36.0	88.2	7.94	82.6	7.34	82.6	7.34	82.6	7.34	82.6	7.34	80.4	7.34	80.4	7.34	79.5	7.34	
44.0	40.0	88.2	7.41	82.6	6.82	82.6	6.82	82.6	6.82	82.6	6.82	80.4	6.82	80.4	6.82	79.5	6.82		
47.0	43.0	88.2	7.04	82.6	6.54	82.6	6.54	82.6	6.54	82.6	6.54	80.4	6.54	80.4	6.54	79.5	6.54		
51.0	47.0	88.2	6.59	82.6	6.13	82.6	6.13	82.6	6.13	82.6	6.13	80.4	6.13	80.4	6.13	79.5	6.13		
54.0	50.0	88.2	6.27	82.6	5.84	82.6	5.84	82.6	5.84	82.6	5.84	80.4	5.84	80.4	5.84	79.5	5.84		
57.0	53.0	88.2	5.98	82.6	5.57	82.6	5.57	82.6	5.57	82.6	5.57	80.4	5.57	80.4	5.57	79.5	5.57		
60.0	56.0	88.2	5.70	82.6	5.31	82.6	5.31	82.6	5.31	82.6	5.31	80.4	5.31	80.4	5.31	79.5	5.31		
60	-3.64	-4.0	70.8	11.3	70.7	11.6	70.7	11.6	70.8	11.4	70.8	11.4	70.8	11.4	70.8	11.4	70.8	11.4	
	-1.84	-2.2	72.1	11.4	70.8	11.4	70.8	11.4	70.8	11.4	70.8	11.4	70.8	11.4	70.8	11.4	70.8	11.4	
	0.5	0.5	75.6	11.2	70.8	10.3	70.8	10.3	70.8	10.3	70.8	10.3	70.8	10.3	70.8	10.3	70.8	10.3	
	9.5	8.5	75.6	11.6	70.8	9.73	70.8	9.73	70.8	9.73	70.8	9.73	70.8	9.73	70.8	9.73	70.8	9.73	
	13.0	12.0	75.6	11.6	70.8	9.23	70.8	9.23	70.8	9.23	70.8	9.23	70.8	9.23	70.8	9.23	70.8	9.23	
	15.0	14.0	75.6	11.6	70.8	8.73	70.8	8.73	70.8	8.73	70.8	8.73	70.8	8.73	70.8	8.73	70.8	8.73	
	17.0	15.5	75.6	11.6	70.8	8.23	70.8	8.23	70.8	8.23	70.8	8.23	70.8	8.23	70.8	8.23	70.8	8.23	
	19.0	18.0	75.6	11.6	70.8	7.73	70.8	7.73	70.8	7.73	70.8	7.73	70.8	7.73	70.8	7.73	70.8	7.73	
	22.0	20.0	75.6	11.6	70.8	7.23	70.8	7.23	70.8	7.23	70.8	7.23	70.8	7.23	70.8	7.23	70.8	7.23	
	26.0	24.0	75.6	11.6	70.8	6.73	70.8	6.73	70.8	6.73	70.8	6.73	70.8	6.73	70.8	6.73	70.8	6.73	
	30.0	28.0	75.6	11.6	70.8	6.23	70.8	6.23	70.8	6.23	70.8	6.23	70.8	6.23	70.8	6.23	70.8	6.23	
	35.0	32.0	75.6	11.6	70.8	5.73	70.8	5.73	70.8	5.73	70.8	5.73	70.8	5.73	70.8	5.73	70.8	5.73	
40.0	36.0	75.6	11.6	70.8	5.23	70.8	5.23	70.8	5.23	70.8	5.23	70.8	5.23	70.8	5.23	70.8	5.23		
44.0	40.0	75.6	11.6	70.8	4.73	70.8	4.73	70.8	4.73	70.8	4.73	70.8	4.73	70.8	4.73	70.8	4.73		
47.0	43.0	75.6	11.6	70.8	4.23	70.8	4.23	70.8	4.23	70.8	4.23	70.8	4.23	70.8	4.23	70.8	4.23		
51.0	47.0	75.6	11.6	70.8	3.73	70.8	3.73	70.8	3.73	70.8	3.73	70.8	3.73	70.8	3.73	70.8	3.73		
54.0	50.0	75.6	11.6	70.8	3.23	70.8	3.23	70.8	3.23	70.8	3.23	70.8	3.23	70.8	3.23	70.8	3.23		
57.0	53.0	75.6	11.6	70.8	2.73	70.8	2.73	70.8	2.73	70.8	2.73	70.8	2.73	70.8	2.73	70.8	2.73		
60.0	56.0	75.6	11.6	70.8	2.23	70.8	2.23	70.8	2.23	70.8	2.23	70.8	2.23	70.8	2.23	70.8	2.23		
50	-3.64	-4.0	63.0	10.1	59.0	9.29	56.0	8.73	54.0	8.36	52.0	8.00	49.0	7.47	49.0	7.47	49.0	7.31	
	-1.84	-2.2	63.0	9.84	59.0	9.09	56.0	8.54	54.0	8.19	52.0	7.83	49.0	7.31	49.0	7.31	49.0	7.14	
	0.5	0.5	63.0	8.93	59.0	8.28	56.0	7.77	54.0	7.45	52.0	7.14	49.0	6.67	49.0	6.67	49.0	6.50	
	9.5	8.5	63.0	8.48	59.0	7.89	56.0	7.39	54.0	7.09	52.0	6.79	49.0	6.36	49.0	6.36	49.0	6.19	
	13.0	12.0	63.0	7.93	59.0	7.50	56.0	7.02	54.0	6.73	52.0	6.53	49.0	6.11	49.0	6.11	49.0	5.94	
	15.0	14.0	63.0	7.79	59.0	7.35	56.0	6.87	54.0	6.59	52.0	6.40	49.0	6.00	49.0	6.00	49.0	5.83	
	17.0	15.5	63.0	7.69	59.0	7.15	56.0	6.65	54.0	6.33	52.0	6.13	49.0	5.74	49.0	5.74	49.0	5.57	
	19.0	18.0	63.0	7.30	59.0	6.78	56.0	6.40	54.0	6.14	52.0	5.90	49.0	5.53	49.0	5.53	49.0	5.36	
	22.0	20.0	63.0	7.07	59.0	6.57	56.0	6.20	54.0	5.96	52.0	5.72	49.0	5.37	49.0	5.37	49.0	5.20	
	26.0	24.0	63.0	6.63	59.0	6.16	56.0	5.82	54.0	5.60	52.0	5.38	49.0	5.05	49.0	5.05	49.0	4.87	
	30.0	28.0	63.0	6.21	59.0	5.78	56.0	5.46	54.0	5.26	52.0	5.05	49.0	4.75	49.0	4.75	49.0	4.57	
	35.0	32.0	63.0	5.82	59.0	5.42	56.0	5.13	54.0	4.94	52.0	4.75	49.0	4.47	49.0	4.47	49.0	4.29	
39.0	36.0	63.0	5.46	59.0	5.09	56.0	4.82	54.0	4.65	52.0	4.47	49.0	4.21	49.0	4.21	49.0	4.03		
44.0	40.0	63.0	5.12	59.0	4.79	56.0	4.54	54.0	4.37	52.0	4.21	49.0	3.97	49.0	3.97	49.0	3.80		
47.0	43.0	63.0	4.89	59.0	4.57	56.0	4.34	54.0	4.16	52.0	4.03	49.0	3.80	49.0	3.80	49.0	3.63		
51.0	47.0	63.0	4.60	59.0	4.31	56.0	4.09	54.0	3.91	52.0	3.84	49.0	3.64	49.0	3.64	49.0	3.45		
54.0	50.0	63.0	4.40	59.0	4.12	56.0	3.91	54.0	3.78	52.0	3.64	49.0	3.45	49.0	3.45	49.0	3.28		
57.0	53.0	63.0	4.21	59.0	3.94	56.0	3.75	54.0	3.62	52.0	3.50	49.0	3.31	49.0	3.31	49.0	3.14		
60.0	56.0	63.0	4.03	59.0	3.78	56.0	3.60	54.0	3.48	52.0	3.36	49.0	3.18	49.0	3.18	49.0	3.01		

TC : Total capacity ; MBH

PI : Power Input ; kW (Comp.+Outdoor fan motor)

Note1 : is shown as reference

When selecting the unit models, avoid the Outdoor air temperature range shown by

REYQ120PYDN

Combit-nation (%)	Outdoor air temp. (F/D)B	Indoor air temp. F/D B																	
		61			65			68			70			72			75		
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH
100	-3.64	-4.0	77.2	7.50	76.9	8.02	76.7	8.22	76.7	8.42	76.6	8.68	76.4	8.94	76.2	9.34			
	-1.84	-2.2	78.6	7.65	78.3	8.16	78.1	8.36	78.1	8.56	77.9	8.81	77.8	9.07	77.6	9.45			
	0.5	0.5	84.6	8.69	84.5	9.06	84.3	9.12	84.3	9.12	84.6	9.36	84.6	9.56	84.6	9.95			
	1.3	1.3	92.4	9.33	92.1	9.37	91.9	9.69	91.7	9.91	91.6	10.1	91.4	10.5					
	13.0	12.0	94.8	9.12	94.5	9.64	94.5	9.86	94.1	10.1	94.0	10.3	93.8	10.7					
	17.0	15.5	96.7	9.25	96.4	9.67	96.4	9.98	96.0	10.2	95.9	10.4	95.6	10.7					
	19.0	18.0	99.9	9.48	99.8	9.88	99.4	10.2	99.3	10.4	99.1	10.6	98.9	10.9					
	22.0	20.0	103	9.66	102	10.0	102	10.3	102	10.5	102	10.7	102	11.0					
	26.0	24.0	109	10.0	108	10.4	108	10.8	108	11.0	108	11.2	108	11.3					
	30.0	28.0	112	10.3	111	10.7	111	10.9	111	11.1	111	11.4	111	11.4					
90	-3.64	-4.0	77.2	7.50	76.9	8.02	76.7	8.22	76.7	8.42	76.6	8.68	76.4	8.94	76.2	9.34			
	-1.84	-2.2	78.6	7.65	78.3	8.16	78.1	8.36	78.1	8.56	77.9	8.81	77.8	9.07	77.6	9.45			
	0.5	0.5	84.6	8.69	84.5	9.06	84.3	9.12	84.3	9.12	84.6	9.36	84.6	9.56	84.6	9.95			
	1.3	1.3	92.4	9.33	92.1	9.37	91.9	9.69	91.7	9.91	91.6	10.1	91.4	10.5					
	13.0	12.0	94.8	9.12	94.5	9.64	94.5	9.86	94.1	10.1	94.0	10.3	93.8	10.7					
	17.0	15.5	96.7	9.25	96.4	9.67	96.4	9.98	96.0	10.2	95.9	10.4	95.6	10.7					
	19.0	18.0	99.9	9.48	99.8	9.88	99.4	10.2	99.3	10.4	99.1	10.6	98.9	10.9					
	22.0	20.0	103	9.66	102	10.0	102	10.3	102	10.5	102	10.7	102	11.0					
	26.0	24.0	109	10.0	108	10.4	108	10.8	108	11.0	108	11.2	108	11.3					
	30.0	28.0	112	10.3	111	10.7	111	10.9	111	11.1	111	11.4	111	11.4					
80	-3.64	-4.0	77.2	7.50	76.9	8.02	76.7	8.22	76.7	8.42	76.6	8.68	76.4	8.94	76.2	9.34			
	-1.84	-2.2	78.6	7.65	78.3	8.16	78.1	8.36	78.1	8.56	77.9	8.81	77.8	9.07	77.6	9.45			
	0.5	0.5	84.6	8.69	84.5	9.06	84.3	9.12	84.3	9.12	84.6	9.36	84.6	9.56	84.6	9.95			
	1.3	1.3	92.4	9.33	92.1	9.37	91.9	9.69	91.7	9.91	91.6	10.1	91.4	10.5					
	13.0	12.0	94.8	9.12	94.5	9.64	94.5	9.86	94.1	10.1	94.0	10.3	93.8	10.7					
	17.0	15.5	96.7	9.25	96.4	9.67	96.4	9.98	96.0	10.2	95.9	10.4	95.6	10.7					
	19.0	18.0	99.9	9.48	99.8	9.88	99.4	10.2	99.3	10.4	99.1	10.6	98.9	10.9					
	22.0	20.0	103	9.66	102	10.0	102	10.3	102	10.5	102	10.7	102	11.0					
	26.0	24.0	109	10.0	108	10.4	108	10.8	108	11.0	108	11.2	108	11.3					
	30.0	28.0	112	10.3	111	10.7	111	10.9	111	11.1	111	11.4	111	11.4					

Combit-nation (%)	Outdoor air temp. (F/D)B	Indoor air temp. F/D B																	
		61			65			68			70			72			75		
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH
130	-3.64	-4.0	78.2	5.02	78.2	5.70	77.9	6.21	77.8	6.55	77.6	6.89	77.3	7.41					
	-1.84	-2.2	79.9	5.21	79.9	5.38	79.3	5.98	79.1	6.12	78.9	6.36	78.6	6.96					
	0.5	0.5	86.2	6.04	86.6	6.66	86.5	7.12	86.3	7.70	86.6	8.04	86.5	8.63					
	1.3	1.3	93.7	6.98	93.3	7.44	93.1	7.87	92.9	8.15	92.7	8.43	92.4	8.98					
	13.0	12.0	96.1	7.12	95.8	7.66	95.5	8.03	95.3	8.35	95.1	8.63	94.8	9.04					
	17.0	15.5	98.0	7.29	97.6	7.83	97.4	8.24	97.2	8.51	97.0	8.78	96.7	9.18					
	19.0	18.0	101	7.59	101	8.11	101	8.50	101	8.76	100	9.02	100.0	9.41					
	22.0	20.0	104	7.82	104	8.33	103	8.70	103	8.96	103	9.21	103	9.59					
	26.0	24.0	110	8.20	110	8.75	109	9.11	109	9.35	109	9.58	109	9.94					
	30.0	28.0	116	8.70	116	9.15	116	9.42	116	9.72	116	10.0	116	10.3					
120	-3.64	-4.0	80.0	3.90	80.0	4.30	79.7	4.63	79.7	4.97	79.7	5.31	79.7	5.65					
	-1.84	-2.2	81.7	4.10	81.7	4.50	81.4	4.83	81.4	5.17	81.4	5.51	81.4	5.85					
	0.5	0.5	88.3	4.93	88.3	5.33	88.0	5.66	88.0	6.00	88.0	6.34	88.0	6.68					
	1.3	1.3	95.7	5.77	95.3	6.17	95.0	6.50	94.9	6.83	94.7	7.16	94.5	7.50					
	13.0	12.0	98.1	5.91	97.7	6.31	97.4	6.64	97.2	6.97	97.0	7.30	96.8	7.64					
	17.0	15.5	100	6.05	100	6.45	100	6.80	100	7.15	100	7.50	100	7.85					
	19.0	18.0	104	6.20	104	6.60	104	6.95	104	7.30	104	7.65	104	8.00					
	22.0	20.0	109	6.40	109	6.80	109	7.15	109	7.50	109	7.85	109	8.20					
	26.0	24.0	116	6.85	116	7.25	116	7.60	116	7.95	116	8.30	116	8.65					
	30.0	28.0	123	7.30	123	7.70	123	8.05	123	8.40	123	8.75	123	9.10					
110	-3.64	-4.0	77.4	7.25	77.4	7.93	77.1	8.26	77.1	8.59	76.8	8.92	76.6	9.36					
	-1.84	-2.2	79.0	7.44	79.0	7.83	78.7	8.16	78.4	8.48	78.1	8.80	77.9	9.18					
	0.5	0.5	85.3	8.27	85.0	8.66	84.7	9.05	84.4	9.44	84.1	9.83	84.2	10.21					
	1.3	1.3	92.7	9.11	92.3	9.50	92.0	9.89	91.7	10.28	91.4	10.66	91.1	11.04					
	13.0	12.0	95.1	9.25	94.7	9.64	94.4	10.03	94.1	10.42	93.8	10.81	93.5	11.19					
	17.0	15.5	97.1	9.39	96.7	9.78	96.4	10.17	96.1	10.56	95.8	10.95	95.5	11.33					
	19.0	18.0	101	9.53	101	9.92	100	10.31	100	10.70	100	11.09	100	11.48					
	22.0	20.0	106	9.77	106	10.16	106	10.55	106	10.94	106	11.33	106	11.71					
	26.0	24.0	113	10.20	113	10.59	113	10.98	113	11.37	113	11.76	113	12.14					
	30.0	28.0	120	10.63	120	11.02	120	11.41	120	11.80	120	12.19	120	12.57					

TC: Total capacity ; MBH
 PI: Power Input ; kW (Comp.+Outdoor fan motor)
 Note1: [] is shown as reference.
 When selecting the unit models, avoid the Outdoor air temperature range shown by []

Heating capacity

Comb- ration (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB												
		61		65		68		70		72		75		
		TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	
70	-3.64	-4.0	75.9	9.98	75.7	10.3	75.5	10.6	75.4	10.8	75.3	11.0	75.2	11.3
	-1.84	-2.2	77.2	10.1	77.0	10.4	76.8	10.7	76.7	10.9	76.6	11.1	76.5	11.3
	9.5	8.5	87.5	10.5	86.3	10.9	83.7	11.3	86.0	11.3	86.5	11.6	86.8	11.7
	13.0	12.0	91.0	11.0	90.8	11.3	90.6	11.5	90.5	11.7	90.4	11.8	89.8	11.1
	15.0	14.0	93.4	11.1	93.2	11.4	93.1	11.6	93.0	11.8	91.0	11.6	89.8	10.8
	17.0	15.5	95.3	11.2	95.1	11.5	94.9	11.7	94.5	11.8	91.0	11.3	85.8	10.5
	19.0	18.0	98.6	11.4	98.4	11.7	98.0	11.8	94.5	11.3	91.0	10.8	85.8	10.1
	22.0	20.0	101	11.5	101	11.8	98.0	11.4	94.5	10.9	91.0	10.5	85.8	9.76
	26.0	24.0	107	11.7	103	11.4	98.0	10.7	94.5	10.2	91.0	9.78	85.8	9.13
	30.0	28.0	110	11.4	103	10.6	98.0	9.96	94.5	9.54	91.0	9.14	85.8	8.54
	35.0	32.0	110	10.7	103	9.87	98.0	9.30	94.5	8.92	91.0	8.54	85.8	8.00
	39.0	36.0	110	10.0	103	9.84	98.0	8.65	94.5	8.24	91.0	7.86	85.8	7.49
44.0	40.0	109	9.26	103	8.84	98.0	8.05	94.5	7.56	91.0	7.13	85.8	6.86	
47.0	43.0	110	8.81	103	8.19	98.0	7.73	94.5	7.43	91.0	7.13	85.8	6.70	
51.0	47.0	110	8.24	103	7.67	98.0	7.24	94.5	6.96	91.0	6.69	85.8	6.28	
54.0	50.0	110	7.85	103	7.30	98.0	6.91	94.5	6.64	91.0	6.38	85.8	6.00	
57.0	53.0	110	7.48	103	6.97	98.0	6.59	94.5	6.34	91.0	6.10	85.8	5.74	
60.0	56.0	110	7.13	103	6.65	98.0	6.29	94.5	6.06	91.0	5.83	85.8	5.49	
60	-3.64	-4.0	75.4	10.8	75.2	11.1	75.1	11.4	75.1	11.5	74.9	11.7	73.5	11.6
	-1.84	-2.2	76.7	10.9	76.6	11.2	76.4	11.4	76.4	11.6	76.3	11.7	73.5	11.3
	9.5	5.0	83.0	11.3	82.8	11.6	82.7	11.8	81.0	11.6	78.0	11.0	73.5	10.3
	13.0	12.0	85.6	11.5	84.5	11.8	84.0	11.5	81.0	11.0	78.0	10.5	73.5	9.29
	15.0	14.0	89.0	11.8	88.5	11.2	84.0	10.5	81.0	10.1	78.0	9.64	73.5	9.00
	17.0	15.5	94.5	11.8	88.5	10.9	84.0	10.3	81.0	9.83	78.0	9.41	73.5	8.79
	19.0	18.0	94.5	11.3	88.5	10.5	84.0	9.85	81.0	9.44	78.0	9.04	73.5	8.45
	22.0	20.0	94.5	10.9	88.5	10.1	84.0	9.53	81.0	9.14	78.0	8.75	73.5	8.19
	26.0	24.0	94.5	10.2	88.5	9.47	84.0	8.92	81.0	8.56	78.0	8.20	73.5	7.68
	30.0	28.0	94.5	9.54	88.5	8.85	84.0	8.35	81.0	8.02	78.0	7.69	73.5	7.21
	35.0	32.0	94.5	8.92	88.5	8.28	84.0	7.81	81.0	7.51	78.0	7.21	73.5	6.76
	39.0	36.0	94.5	8.34	88.5	7.75	84.0	7.32	81.0	7.04	78.0	6.76	73.5	6.35
44.0	40.0	94.5	7.80	88.5	7.20	84.0	6.86	81.0	6.60	78.0	6.35	73.5	5.97	
47.0	43.0	94.5	7.36	88.5	6.82	84.0	6.46	81.0	6.20	78.0	5.90	73.5	5.77	
51.0	47.0	94.5	6.96	88.5	6.50	84.0	6.15	81.0	5.90	78.0	5.70	73.5	5.37	
54.0	50.0	94.5	6.64	88.5	6.20	84.0	5.88	81.0	5.66	78.0	5.45	73.5	5.14	
57.0	53.0	94.5	6.34	88.5	5.92	84.0	5.62	81.0	5.42	78.0	5.22	73.5	4.92	
60.0	56.0	94.5	6.06	88.5	5.67	84.0	5.38	81.0	5.18	78.0	5.00	73.5	4.72	
50	-3.64	-4.0	75.0	11.6	73.7	11.6	70.0	10.9	67.5	10.5	65.0	10.0	61.3	9.35
	-1.84	-2.2	76.3	11.7	73.7	11.4	70.0	10.7	67.5	10.2	65.0	9.80	61.3	9.15
	9.5	5.0	78.7	11.2	73.7	10.3	70.0	9.72	67.5	9.32	65.0	8.83	61.3	8.35
	13.0	12.0	78.7	10.6	73.7	9.82	70.0	9.25	67.5	8.87	65.0	8.50	61.3	7.96
	17.0	15.5	78.7	9.71	73.7	9.32	70.0	8.75	67.5	8.43	65.0	8.04	61.3	7.57
	19.0	18.0	78.7	9.51	73.7	8.83	70.0	8.32	67.5	7.99	65.0	7.66	61.3	7.18
	22.0	20.0	78.7	9.14	73.7	8.48	70.0	8.00	67.5	7.69	65.0	7.38	61.3	6.92
	26.0	24.0	78.7	8.85	73.7	8.22	70.0	7.76	67.5	7.45	65.0	7.16	61.3	6.71
	30.0	28.0	78.7	8.29	73.7	7.71	70.0	7.28	67.5	7.00	65.0	6.73	61.3	6.32
	35.0	32.0	78.7	7.77	73.7	7.23	70.0	6.84	67.5	6.58	65.0	6.32	61.3	5.94
	39.0	36.0	78.7	7.28	73.7	6.79	70.0	6.42	67.5	6.18	65.0	5.95	61.3	5.60
	44.0	40.0	78.7	6.83	73.7	6.37	70.0	6.03	67.5	5.81	65.0	5.59	61.3	5.27
47.0	43.0	78.7	6.41	73.7	5.99	70.0	5.68	67.5	5.47	65.0	5.27	61.3	4.97	
51.0	47.0	78.7	6.12	73.7	5.72	70.0	5.43	67.5	5.23	65.0	5.04	61.3	4.66	
54.0	50.0	78.7	5.75	73.7	5.46	70.0	5.16	67.5	4.97	65.0	4.78	61.3	4.50	
57.0	53.0	78.7	5.52	73.7	5.15	70.0	4.90	67.5	4.73	65.0	4.56	61.3	4.30	
60.0	56.0	78.7	5.27	73.7	4.94	70.0	4.69	67.5	4.53	65.0	4.37	61.3	4.14	

TC : Total capacity ; MBH

PI : Power Input ; kW (Comp.+Outdoor fan motor)

Note1 : is shown as reference

When selecting the unit models, avoid the Outdoor air temperature range shown by

REYQ144PYDN

Combit-nation (%)	Outdoor air temp. (F/WB)	Indoor air temp. F/DB												
		61			65			70			75			
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	
100	-3.64	4.0	110	12.2	110	12.7	109	13.1	109	13.4	109	13.7	109	14.1
	-1.84	-2.2	112	12.3	112	12.9	111	13.3	111	13.5	111	13.8	111	14.2
	0.5	5.5	114	12.4	113	13.0	112	13.4	112	13.6	112	14.0	112	14.4
	9.5	8.5	116	12.5	115	13.1	114	13.5	114	13.7	114	14.1	114	14.5
	13.0	12.0	118	12.6	117	13.2	116	13.6	116	13.8	116	14.2	116	14.6
	15.0	14.0	120	12.7	119	13.3	118	13.7	118	13.9	118	14.3	118	14.7
	17.0	15.5	122	12.8	120	13.4	120	13.8	120	14.0	120	14.4	120	14.8
	19.0	18.0	124	12.9	122	13.5	122	14.0	122	14.2	122	14.6	122	15.0
	21.0	20.0	126	13.0	124	13.6	124	14.1	124	14.3	124	14.7	124	15.1
	23.0	22.0	128	13.1	126	13.7	126	14.2	126	14.4	126	14.8	126	15.2
	25.0	24.0	130	13.2	128	13.8	128	14.3	128	14.5	128	14.9	128	15.3
	27.0	26.0	132	13.3	130	13.9	130	14.4	130	14.6	130	15.0	130	15.4
29.0	28.0	134	13.4	132	14.0	132	14.5	132	14.7	132	15.1	132	15.5	
31.0	30.0	136	13.5	134	14.1	134	14.6	134	14.8	134	15.2	134	15.6	
33.0	32.0	138	13.6	136	14.2	136	14.7	136	14.9	136	15.3	136	15.7	
35.0	34.0	140	13.7	138	14.3	138	14.8	138	15.0	138	15.4	138	15.8	
37.0	36.0	142	13.8	140	14.4	140	14.9	140	15.1	140	15.5	140	15.9	
39.0	38.0	144	13.9	142	14.5	142	15.0	142	15.2	142	15.6	142	16.0	
41.0	40.0	146	14.0	144	14.6	144	15.1	144	15.3	144	15.7	144	16.1	
43.0	42.0	148	14.1	146	14.7	146	15.2	146	15.4	146	15.8	146	16.2	
45.0	44.0	150	14.2	148	14.8	148	15.3	148	15.5	148	15.9	148	16.3	
47.0	46.0	152	14.3	150	14.9	150	15.4	150	15.6	150	16.0	150	16.4	
49.0	48.0	154	14.4	152	15.0	152	15.5	152	15.7	152	16.1	152	16.5	
51.0	50.0	156	14.5	154	15.1	154	15.6	154	15.8	154	16.2	154	16.6	
53.0	52.0	158	14.6	156	15.2	156	15.7	156	15.9	156	16.3	156	16.7	
55.0	54.0	160	14.7	158	15.3	158	15.8	158	16.0	158	16.4	158	16.8	
57.0	56.0	162	14.8	160	15.4	160	15.9	160	16.1	160	16.5	160	16.9	
59.0	58.0	164	14.9	162	15.5	162	16.0	162	16.2	162	16.6	162	17.0	
61.0	60.0	166	15.0	164	15.6	164	16.1	164	16.3	164	16.7	164	17.1	
63.0	62.0	168	15.1	166	15.7	166	16.2	166	16.4	166	16.8	166	17.2	
65.0	64.0	170	15.2	168	15.8	168	16.3	168	16.5	168	16.9	168	17.3	
67.0	66.0	172	15.3	170	15.9	170	16.4	170	16.6	170	17.0	170	17.4	
69.0	68.0	174	15.4	172	16.0	172	16.5	172	16.7	172	17.1	172	17.5	
71.0	70.0	176	15.5	174	16.1	174	16.6	174	16.8	174	17.2	174	17.6	
73.0	72.0	178	15.6	176	16.2	176	16.7	176	16.9	176	17.3	176	17.7	
75.0	74.0	180	15.7	178	16.3	178	16.8	178	17.0	178	17.4	178	17.8	
77.0	76.0	182	15.8	180	16.4	180	16.9	180	17.1	180	17.5	180	17.9	
79.0	78.0	184	15.9	182	16.5	182	17.0	182	17.2	182	17.6	182	18.0	
81.0	80.0	186	16.0	184	16.6	184	17.1	184	17.3	184	17.7	184	18.1	
83.0	82.0	188	16.1	186	16.7	186	17.2	186	17.4	186	17.8	186	18.2	
85.0	84.0	190	16.2	188	16.8	188	17.3	188	17.5	188	17.9	188	18.3	
87.0	86.0	192	16.3	190	16.9	190	17.4	190	17.6	190	18.0	190	18.4	
89.0	88.0	194	16.4	192	17.0	192	17.5	192	17.7	192	18.1	192	18.5	
91.0	90.0	196	16.5	194	17.1	194	17.6	194	17.8	194	18.2	194	18.6	
93.0	92.0	198	16.6	196	17.2	196	17.7	196	17.9	196	18.3	196	18.7	
95.0	94.0	200	16.7	198	17.3	198	17.8	198	18.0	198	18.4	198	18.8	
97.0	96.0	202	16.8	200	17.4	200	17.9	200	18.1	200	18.5	200	18.9	
99.0	98.0	204	16.9	202	17.5	202	18.0	202	18.2	202	18.6	202	19.0	
100	100	206	17.0	204	17.6	204	18.1	204	18.3	204	18.7	204	19.1	

Combit-nation (%)	Outdoor air temp. (F/WB)	Indoor air temp. F/DB												
		61			65			70			75			
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	
130	-3.64	4.0	110	11.2	110	11.6	110	12.0	110	12.3	110	12.7	110	13.1
	-1.84	-2.2	112	11.3	112	11.7	112	12.1	112	12.4	112	12.8	112	13.2
	0.5	5.5	114	11.4	113	11.8	113	12.2	113	12.5	113	12.9	113	13.3
	9.5	8.5	116	11.5	115	11.9	115	12.3	115	12.6	115	13.0	115	13.4
	13.0	12.0	118	11.6	117	12.0	117	12.4	117	12.7	117	13.1	117	13.5
	15.0	14.0	120	11.7	119	12.1	119	12.5	119	12.8	119	13.2	119	13.6
	17.0	15.5	122	11.8	120	12.2	120	12.6	120	12.9	120	13.3	120	13.7
	19.0	18.0	124	11.9	122	12.3	122	12.7	122	13.0	122	13.4	122	13.8
	21.0	20.0	126	12.0	124	12.4	124	12.8	124	13.1	124	13.5	124	13.9
	23.0	22.0	128	12.1	126	12.5	126	12.9	126	13.2	126	13.6	126	14.0
	25.0	24.0	130	12.2	128	12.6	128	13.0	128	13.3	128	13.7	128	14.1
	27.0	26.0	132	12.3	130	12.7	130	13.1	130	13.4	130	13.8	130	14.2
29.0	28.0	134	12.4	132	12.8	132	13.2	132	13.5	132	13.9	132	14.3	
31.0	30.0	136	12.5	134	12.9	134	13.3	134	13.6	134	14.0	134	14.4	
33.0	32.0	138	12.6	136	13.0	136	13.4	136	13.7	136	14.1	136	14.5	
35.0	34.0	140	12.7	138	13.1	138	13.5	138	13.8	138	14.2	138	14.6	
37.0	36.0	142	12.8	140	13.2	140	13.6	140	13.9	140	14.3	140	14.7	
39.0	38.0	144	12.9	142	13.3	142	13.7	142	14.0	142	14.4	142	14.8	
41.0	40.0	146	13.0	144	13.4	144	13.8	144	14.1	144	14.5	144	14.9	
43.0	42.0	148	13.1	146	13.5	146	13.9	146	14.2	146	14.6	146	15.0	
45.0	44.0	150	13.2	148	13.6	148	14.0	148	14.3	148	14.7	148	15.1	
47.0	46.0	152	13.3	150	13.7	150	14.1	150	14.4	150	14.8	150	15.2	
49.0	48.0	154	13.4	152	13.8	152	14.2	152	14.5	152	14.9	152	15.3	
51.0	50.0	156	13.5	154	13.9	154	14.3	154	14.6	154	15.0	154	15.4	
53.0	52.0	158	13.6	156	14.0	156	14.4	156	14.7	156	15.1	156	15.5	
55.0	54.0	160	13.7	158	14.1	158	14.5	158	14.8	158	15.2	158	15.6	
57.0	56.0	162	13.8	160	14.2	160	14.6	160	14.9	160	15.3	160	15.7	
59.0	58.0	164	13.9	162	14.3	162	14.7	162	15.0	162	15.4	162	15.8	
61.0	60.0	166	14.0	164	14.4	164	14.8	164	15.1	164	15.5	164	15.9	
63.0	62.0	168	14.1	166	14.5	166	14.9	166	15.2	166	15.6	166	16.0	
65.0	64.0	170	14.2	168	14.6	168	15.0	168	15.3	168	15.7	168	16.1	
67.0	66.0	172	14.3	170	14.7	170	15.1	170	15.4	170	15.8	170	16.2	
69.0	68.0	174	14.4	172	14.8	172	15.2	172	15.5	172	15.9	172	16.3	
71.0	70.0	176	14.5	174	14.9	174	15.3	174	15.6	174	16.0	174	16.4	
73.0	72.0	178</												

Heating capacity

Comb- ration (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB												
		61		65		68		70		72		75		
		TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	
70	-3.64	-4.0	108	14.7	108	15.4	108	15.5	108	15.5	108	15.7	103	14.9
	-1.84	-2.2	110	14.8	110	15.2	110	15.5	110	15.6	109	15.7	103	14.6
	9.5	8.5	125	15.3	125	15.7	118	15.7	118	15.7	109	15.7	103	15.2
	13.0	12.0	130	15.8	124	14.9	118	13.9	113	13.3	109	12.7	103	11.9
	15.0	14.0	132	15.6	124	14.4	118	13.5	113	12.9	109	12.3	103	11.5
	17.0	15.5	132	15.2	124	14.0	118	12.6	113	12.6	109	12.0	103	11.2
	19.0	18.0	132	14.6	124	13.4	118	12.2	113	12.1	109	11.5	103	10.8
	22.0	20.0	132	14.1	124	13.0	118	12.2	113	11.7	109	11.2	103	10.4
	30.0	28.0	132	12.2	124	11.3	118	10.6	113	10.2	109	10.4	103	9.76
	35.0	32.0	132	11.4	124	10.6	118	9.94	113	9.54	109	9.14	103	8.55
	39.0	36.0	132	10.6	124	9.82	118	9.20	113	8.70	109	8.30	103	7.91
	47.0	43.0	132	9.44	124	8.77	118	8.28	113	7.96	109	7.64	103	7.17
60	51.0	47.0	132	8.84	124	8.22	118	7.76	113	7.47	109	7.17	103	6.74
	54.0	50.0	132	8.42	124	7.83	118	7.41	113	7.13	109	6.85	103	6.44
	57.0	53.0	132	8.02	124	7.47	118	7.07	113	6.81	109	6.54	103	6.16
	60.0	56.0	132	7.66	124	7.14	118	6.76	113	6.51	109	6.26	103	5.89
	-3.64	-4.0	108	15.5	106	15.5	101	14.5	97.2	13.9	93.6	13.2	88.2	12.3
	-1.84	-2.2	110	15.6	106	15.1	101	14.2	97.2	13.6	93.6	13.0	88.2	12.1
	5.5	5.0	113	14.9	106	13.7	101	12.9	97.2	12.3	93.6	11.8	88.2	11.0
	9.5	8.5	113	14.1	106	13.0	101	12.2	97.2	11.7	93.6	11.2	88.2	10.4
	13.0	12.0	113	12.9	106	11.9	101	11.2	97.2	10.7	93.6	10.3	88.2	9.90
	15.0	14.0	113	12.9	106	11.9	101	11.2	97.2	10.7	93.6	10.3	88.2	9.90
	17.0	15.5	113	12.6	106	11.6	101	10.9	97.2	10.5	93.6	10.0	88.2	9.38
	19.0	18.0	113	12.1	106	11.2	101	10.5	97.2	10.1	93.6	9.65	88.2	9.02
22.0	20.0	113	11.7	106	10.8	101	10.2	97.2	9.76	93.6	9.35	88.2	8.74	
26.0	24.0	113	10.9	106	10.1	101	9.53	97.2	9.15	93.6	8.77	88.2	8.21	
30.0	28.0	113	10.2	106	9.46	101	8.92	97.2	8.57	93.6	8.22	88.2	7.70	
35.0	32.0	113	9.54	106	8.86	101	8.36	97.2	8.03	93.6	7.71	88.2	7.23	
39.0	36.0	113	8.92	106	8.30	101	7.84	97.2	7.53	93.6	7.24	88.2	6.80	
44.0	40.0	113	8.35	106	7.74	101	7.35	97.2	7.07	93.6	6.80	88.2	6.39	
47.0	43.0	113	7.85	106	7.24	101	6.91	97.2	6.73	93.6	6.41	88.2	6.01	
51.0	47.0	113	7.47	106	6.96	101	6.59	97.2	6.35	93.6	6.11	88.2	5.71	
54.0	50.0	113	7.12	106	6.65	101	6.30	97.2	6.07	93.6	5.85	88.2	5.51	
57.0	53.0	113	6.80	106	6.36	101	6.03	97.2	5.81	93.6	5.60	88.2	5.28	
60.0	56.0	113	6.51	106	6.08	101	5.77	97.2	5.57	93.6	5.36	88.2	5.06	
50	-3.64	-4.0	94.5	13.4	88.5	12.4	84.0	11.6	81.0	11.1	78.0	10.7	73.5	9.94
	-1.84	-2.2	94.5	13.1	88.5	12.1	84.0	11.4	81.0	10.9	78.0	10.4	73.5	9.74
	5.5	5.0	94.5	11.9	88.5	11.0	84.0	10.4	81.0	9.93	78.0	9.51	73.5	8.90
	9.5	8.5	94.5	11.3	88.5	10.5	84.0	9.86	81.0	9.46	78.0	9.06	73.5	8.48
	13.0	12.0	94.5	10.7	88.5	9.84	84.0	9.36	81.0	8.95	78.0	8.62	73.5	7.97
	17.0	15.5	94.5	10.2	88.5	9.42	84.0	8.88	81.0	8.52	78.0	8.28	73.5	7.67
	19.0	18.0	94.5	9.76	88.5	9.06	84.0	8.54	81.0	8.21	78.0	7.88	73.5	7.39
	22.0	20.0	94.5	9.45	88.5	8.78	84.0	8.28	81.0	7.96	78.0	7.64	73.5	7.17
	26.0	24.0	94.5	8.86	88.5	8.24	84.0	7.78	81.0	7.48	78.0	7.19	73.5	6.75
	30.0	28.0	94.5	8.31	88.5	7.73	84.0	7.31	81.0	7.03	78.0	6.76	73.5	6.36
	35.0	32.0	94.5	7.79	88.5	7.26	84.0	6.87	81.0	6.61	78.0	6.36	73.5	5.99
	39.0	36.0	94.5	7.31	88.5	6.82	84.0	6.46	81.0	6.22	78.0	5.99	73.5	5.64
44.0	40.0	94.5	6.87	88.5	6.41	84.0	6.08	81.0	5.86	78.0	5.64	73.5	5.32	
47.0	43.0	94.5	6.55	88.5	6.13	84.0	5.81	81.0	5.61	78.0	5.40	73.5	5.0	
51.0	47.0	94.5	6.27	88.5	5.87	84.0	5.61	81.0	5.41	78.0	5.20	73.5	4.88	
54.0	50.0	94.5	5.97	88.5	5.53	84.0	5.25	81.0	5.07	78.0	4.89	73.5	4.62	
57.0	53.0	94.5	5.65	88.5	5.30	84.0	5.04	81.0	4.86	78.0	4.69	73.5	4.44	
60.0	56.0	94.5	5.41	88.5	5.08	84.0	4.83	81.0	4.67	78.0	4.51	73.5	4.27	

TC : Total capacity ; MBH
 PI : Power Input ; kW (Comp.+Outdoor fan motor)
 Note1 : is shown as reference
 When selecting the unit models, avoid the Outdoor air temperature range shown by

Heating capacity

Comb- ratio (%)	Outdoor air temp.	Indoor air Temp. F/DB											
		61		65		68		70		72		75	
		TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW
70	-3.64	-4.0	125	17.7	18.2	125	18.5	125	18.7	125	19.0	120	18.2
	-1.84	-2.2	128	17.9	18.3	127	18.6	127	18.9	127	19.1	120	17.8
	0.5	0.5	134	18.4	19.1	131	19.1	131	19.2	131	19.5	120	18.2
	5.5	8.5	138	18.7	19.4	137	19.1	137	19.2	137	19.5	120	18.2
	13.0	14.0	151	19.0	19.5	145	19.2	145	19.3	145	19.6	120	18.2
	15.0	15.0	154	19.1	19.5	145	19.2	145	19.3	145	19.6	120	18.2
	17.0	17.0	155	18.6	18.6	145	17.2	137	16.1	132	15.4	127	14.7
	19.0	18.0	154	17.9	18.2	145	16.5	137	15.5	132	14.8	127	14.1
	22.0	20.0	154	17.2	17.2	145	15.9	137	14.9	132	14.3	127	13.7
	26.0	24.0	154	16.1	16.1	145	14.9	137	14.0	132	13.4	127	12.8
	30.0	28.0	154	15.0	15.0	145	13.9	137	13.0	132	12.5	127	12.0
	35.0	32.0	154	14.0	14.0	145	12.9	137	12.2	132	11.7	127	11.2
39.0	36.0	154	13.0	13.0	145	11.9	137	11.2	132	10.9	127	10.5	
44.0	40.0	154	12.0	12.0	145	11.0	137	10.3	132	10.3	127	9.9	
47.0	43.0	154	11.6	11.6	145	10.7	137	10.1	132	9.72	127	9.36	
51.0	47.0	154	11.0	11.0	145	10.1	137	9.51	132	9.15	127	8.79	
54.0	50.0	154	10.3	10.3	145	9.60	137	9.07	132	8.73	127	8.39	
57.0	53.0	154	9.83	9.83	145	9.16	137	8.66	132	8.34	127	8.02	
60.0	56.0	154	9.38	9.38	145	8.74	137	8.28	132	7.97	127	7.67	
60	-3.64	-4.0	125	18.7	19.0	118	17.8	113	17.0	109	16.2	103	15.1
	-1.84	-2.2	127	18.9	19.2	118	17.4	113	16.6	109	15.9	103	14.8
	0.5	0.5	132	18.2	18.8	118	16.8	113	16.1	109	15.4	103	13.4
	5.5	8.5	136	17.3	18.1	118	16.0	113	15.1	109	14.4	103	12.6
	13.0	14.0	141	16.7	17.4	118	15.3	113	14.3	109	13.7	103	11.8
	15.0	15.0	140	15.8	16.4	118	14.6	113	13.5	109	12.6	103	11.1
	17.0	15.5	132	15.4	15.4	118	13.4	113	12.5	109	12.3	103	11.1
	19.0	18.0	132	14.8	14.8	118	12.9	113	12.3	109	11.8	103	11.1
	22.0	20.0	132	14.3	14.3	118	12.5	113	12.0	109	11.5	103	10.7
	26.0	24.0	132	13.4	13.4	118	11.7	113	11.2	109	10.7	103	10.1
	30.0	28.0	132	12.5	12.5	118	11.6	113	11.0	109	10.1	103	9.44
	35.0	32.0	132	11.7	11.7	118	10.9	113	10.5	109	9.44	103	8.86
39.0	36.0	132	10.9	10.9	118	10.2	113	9.84	109	8.86	103	8.32	
44.0	40.0	132	10.2	10.2	118	9.60	113	9.23	109	8.86	103	7.83	
47.0	43.0	132	9.72	9.72	118	9.50	113	9.16	109	8.86	103	7.43	
51.0	47.0	132	9.15	9.15	118	8.95	113	8.55	109	8.86	103	7.06	
54.0	50.0	132	8.73	8.73	118	8.08	113	7.76	109	7.49	103	6.75	
57.0	53.0	132	8.34	8.34	118	7.79	113	7.44	109	7.16	103	6.47	
60.0	56.0	132	7.97	7.97	118	7.45	113	7.12	109	6.86	103	6.20	
50	-3.64	-4.0	110	16.4	16.4	103	15.2	98.0	14.2	94.5	13.6	91.0	85.8
	-1.84	-2.2	110	16.1	16.1	103	14.8	98.0	13.9	94.5	13.4	91.0	85.8
	0.5	0.5	110	14.6	14.6	103	13.5	98.0	12.7	94.5	12.2	91.0	85.8
	5.5	8.5	110	13.9	13.9	103	12.8	98.0	12.1	94.5	11.6	91.0	85.8
	13.0	14.0	110	13.1	13.1	103	12.2	98.0	11.5	94.5	11.0	91.0	85.8
	15.0	15.0	110	12.4	12.4	103	11.5	98.0	10.9	94.5	10.4	91.0	85.8
	17.0	15.5	110	12.0	12.0	103	11.1	98.0	10.5	94.5	10.1	91.0	85.8
	19.0	18.0	110	11.6	11.6	103	10.8	98.0	10.1	94.5	9.75	91.0	85.8
	22.0	20.0	110	10.9	10.9	103	10.1	98.0	9.53	94.5	9.17	88.0	85.8
	26.0	24.0	110	10.2	10.2	103	9.47	98.0	8.95	94.5	8.62	91.0	85.8
	30.0	28.0	110	9.54	9.54	103	8.89	98.0	8.41	94.5	8.10	91.0	85.8
	35.0	32.0	110	8.95	8.95	103	8.35	98.0	7.91	94.5	7.62	91.0	85.8
39.0	36.0	110	8.41	8.41	103	7.86	98.0	7.45	94.5	7.18	91.0	85.8	
44.0	40.0	110	8.01	8.01	103	7.51	98.0	7.12	94.5	6.87	91.0	85.8	
47.0	43.0	110	7.56	7.56	103	7.07	98.0	6.72	94.5	6.49	91.0	85.8	
51.0	47.0	110	7.22	7.22	103	6.71	98.0	6.43	94.5	6.21	91.0	85.8	
54.0	50.0	110	6.92	6.92	103	6.49	98.0	6.17	94.5	5.96	91.0	85.8	
57.0	53.0	110	6.63	6.63	103	6.22	98.0	5.92	94.5	5.72	91.0	85.8	
60.0	56.0	110	6.33	6.33	103	5.92	98.0	5.62	94.5	5.44	91.0	85.8	

TC : Total capacity ; MBH
 PI : Power Input ; kW (Comp.+Outdoor fan motor)
 Note1 : is shown as reference.
 When selecting the unit models, avoid the Outdoor air temperature range shown by

Heating capacity

Comb- ration (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB														
		61		65		68		70		72		75				
		TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW	TC MBH	PI kW			
70	-3.64	-4.0	129	18.9	129	19.3	129	19.7	129	19.9	129	19.9	129	19.9	129	19.9
	-1.84	-2.2	132	19.0	131	19.5	131	19.8	130	19.7	129	19.8	129	19.8	129	19.8
	5.5	5.0	142	19.6	142	19.9	134	18.7	130	17.9	125	17.1	118	15.9	15.1	15.1
	9.5	8.5	149	18.9	142	19.9	134	16.7	130	17.0	125	16.2	118	15.1	15.1	15.1
	13.0	12.0	156	18.5	143	19.3	149	16.3	130	16.6	125	15.2	118	13.9	13.9	13.9
	15.0	14.0	160	19.2	156	19.6	156	20.0	151	19.3	156	20.0	156	20.0	156	20.0
	17.0	15.5	164	19.5	163	20.0	157	19.1	151	18.7	146	17.9	137	16.7	16.7	16.7
	19.0	18.0	169	19.8	165	19.5	157	18.3	151	17.5	146	17.4	137	16.3	16.3	16.3
	22.0	20.0	174	20.0	165	18.8	157	17.7	151	16.9	146	16.2	137	15.1	15.1	15.1
	26.0	24.0	176	19.0	165	17.6	157	16.5	151	15.8	146	15.2	137	14.1	14.1	14.1
	30.0	28.0	176	17.7	165	16.4	157	15.4	151	14.8	146	14.2	137	13.2	13.2	13.2
	35.0	32.0	176	16.5	153	15.7	144	14.4	151	13.8	146	13.3	137	12.4	12.4	12.4
39.0	36.0	176	15.4	143	14.6	134	13.4	151	12.9	146	12.6	137	11.6	11.6	11.6	
44.0	40.0	176	14.3	134	13.7	125	12.5	151	12.0	146	11.9	137	10.6	10.6	10.6	
47.0	43.0	176	13.7	127	12.7	119	11.9	151	11.5	146	11.1	137	10.4	10.4	10.4	
51.0	47.0	176	12.8	122	12.2	114	11.4	151	10.8	146	10.4	137	9.77	9.77	9.77	
54.0	50.0	176	12.2	116	11.4	108	10.8	151	10.3	146	9.93	137	9.33	9.33	9.33	
57.0	53.0	176	11.6	108	10.8	103	10.3	151	9.87	146	9.49	137	8.93	8.93	8.93	
60.0	56.0	176	11.1	103	10.3	98	9.8	151	9.43	146	9.07	137	8.54	8.54	8.54	
60	-3.64	-4.0	129	18.9	129	19.3	129	19.7	129	19.9	129	19.9	129	19.9	129	19.9
	-1.84	-2.2	132	19.0	131	19.5	131	19.8	130	19.7	125	18.8	118	17.5	17.5	17.5
	5.5	5.0	142	19.6	142	19.9	134	18.7	130	17.9	125	17.1	118	15.9	15.9	15.9
	9.5	8.5	149	18.9	142	19.9	134	16.7	130	17.0	125	16.2	118	15.1	15.1	15.1
	13.0	12.0	156	18.5	143	19.3	149	16.3	130	16.6	125	15.2	118	13.9	13.9	13.9
	15.0	14.0	160	19.2	156	19.6	156	20.0	151	19.3	156	20.0	156	20.0	156	20.0
	17.0	15.5	164	19.5	163	20.0	157	19.1	151	18.7	146	17.9	137	16.7	16.7	16.7
	19.0	18.0	169	19.8	165	19.5	157	18.3	151	17.5	146	17.4	137	16.3	16.3	16.3
	22.0	20.0	174	20.0	165	18.8	157	17.7	151	16.9	146	16.2	137	15.1	15.1	15.1
	26.0	24.0	176	19.0	165	17.6	157	16.5	151	15.8	146	15.2	137	14.1	14.1	14.1
	30.0	28.0	176	17.7	165	16.4	157	15.4	151	14.8	146	14.2	137	13.2	13.2	13.2
	35.0	32.0	176	16.5	153	15.7	144	14.4	151	13.8	146	13.3	137	12.4	12.4	12.4
39.0	36.0	176	15.4	143	14.6	134	13.4	151	12.9	146	12.6	137	11.6	11.6	11.6	
44.0	40.0	176	14.3	134	13.7	125	12.5	151	12.0	146	11.9	137	10.6	10.6	10.6	
47.0	43.0	176	13.7	127	12.7	119	11.9	151	11.5	146	11.1	137	10.4	10.4	10.4	
51.0	47.0	176	12.8	122	12.2	114	11.4	151	10.8	146	10.4	137	9.77	9.77	9.77	
54.0	50.0	176	12.2	116	11.4	108	10.8	151	10.3	146	9.93	137	9.33	9.33	9.33	
57.0	53.0	176	11.6	108	10.8	103	10.3	151	9.87	146	9.49	137	8.93	8.93	8.93	
60.0	56.0	176	11.1	103	10.3	98	9.8	151	9.43	146	9.07	137	8.54	8.54	8.54	
50	-3.64	-4.0	126	18.4	118	17.9	112	16.9	108	16.1	104	15.4	98.0	14.4	14.4	14.4
	-1.84	-2.2	126	19.0	118	17.6	112	16.5	108	15.8	104	15.1	98.0	14.1	14.1	14.1
	5.5	5.0	126	17.3	118	16.0	112	15.0	108	14.4	104	13.8	98.0	12.9	12.9	12.9
	9.5	8.5	126	16.4	118	15.2	112	14.3	108	13.7	104	13.1	98.0	12.3	12.3	12.3
	13.0	12.0	126	15.5	118	14.4	112	13.5	108	13.0	104	12.5	98.0	11.7	11.7	11.7
	15.0	14.0	126	14.7	118	13.7	112	12.9	108	12.9	104	12.4	98.0	11.4	11.4	11.4
	17.0	15.5	126	14.1	118	13.1	112	12.4	108	12.9	104	11.9	98.0	11.1	11.1	11.1
	19.0	18.0	126	13.7	118	12.7	112	12.0	108	11.9	104	11.4	98.0	10.7	10.7	10.7
	22.0	20.0	126	12.8	118	11.9	112	11.3	108	11.5	104	11.1	98.0	10.4	10.4	10.4
	26.0	24.0	126	12.0	118	11.2	112	10.6	108	10.8	104	10.4	98.0	9.79	9.79	9.79
	30.0	28.0	126	11.3	118	10.5	112	9.96	108	10.2	104	9.80	98.0	9.22	9.22	9.22
	35.0	32.0	126	10.6	118	9.89	112	9.37	108	9.59	104	9.22	98.0	8.68	8.68	8.68
39.0	36.0	126	9.95	118	9.30	112	8.81	108	8.50	104	8.68	98.0	8.18	8.18	8.18	
44.0	40.0	126	9.30	118	8.59	112	7.93	108	7.63	104	7.63	98.0	7.72	7.72	7.72	
47.0	43.0	126	8.59	118	7.87	112	7.43	108	7.13	104	7.13	98.0	6.99	6.99	6.99	
51.0	47.0	126	7.87	118	7.37	112	6.82	108	6.52	104	6.52	98.0	6.39	6.39	6.39	
54.0	50.0	126	7.13	118	6.82	112	6.22	108	5.92	104	5.92	98.0	5.74	5.74	5.74	
57.0	53.0	126	6.52	118	6.37	112	5.71	108	5.41	104	5.41	98.0	5.24	5.24	5.24	
60.0	56.0	126	5.92	118	5.92	112	5.21	108	4.91	104	4.91	98.0	4.74	4.74	4.74	

TC : Total capacity ; MBH

PI : Power Input ; kW (Comp.+Outdoor fan motor)

Note1 : is shown as reference.

When selecting the unit models, avoid the Outdoor air temperature range shown by

REYQ216PYDN

Combit-nation (%)	Outdoor air temp. (F/WB)	Indoor air temp. F/DB												Heating capacity							
		61			65			70			75										
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH								
100	-3.64	4.0	151	136	150	147	150	155	150	16.1	149	166	149	17.4	148	18.5	148	18.9	148	19.6	
	-1.84	4.0	151	139	153	150	152	158	152	16.3	152	168	151	17.6	151	18.0	151	18.7	151	19.1	19.9
	0.5	5.0	166	152	165	162	165	170	164	17.4	164	179	164	18.7	164	19.1	164	19.7	164	20.7	20.7
	9.5	5.0	172	157	172	162	175	171	180	170	18.0	170	185	170	19.3	170	19.7	170	20.5	170	21.5
	13.0	12.0	181	154	180	164	180	173	186	176	18.1	183	189	183	19.7	183	20.6	183	21.2	183	22.1
	15.0	14.0	186	158	185	168	185	175	184	184	18.4	184	194	184	19.4	184	20.6	184	21.2	184	21.8
	17.0	15.5	189	161	189	170	188	177	188	182	188	186	186	187	193	186	20.6	186	21.1	186	21.8
	19.0	18.0	196	166	195	175	195	182	194	186	194	191	194	197	192	192	21.4	192	21.7	192	22.2
	22.0	20.0	201	170	201	179	200	185	200	190	199	194	199	200	200	200	21.9	200	22.0	200	22.5
	30.0	28.0	225	185	224	200	224	203	223	203	223	206	223	212	223	212	222	222	221	222	23.0
	35.0	32.0	237	192	237	203	237	209	237	209	237	212	236	218	236	218	222	222	221	222	23.3
	40.0	36.0	249	198	249	209	249	216	249	216	249	216	249	216	249	216	222	222	221	222	23.7
47.0	43.0	279	210	278	216	278	221	277	221	277	221	277	221	277	221	222	222	221	222	24.1	
51.0	47.0	295	216	295	221	294	226	294	226	294	226	294	226	294	226	222	222	221	222	24.5	
54.0	50.0	308	220	308	225	307	229	307	229	307	229	307	229	307	229	222	222	221	222	24.9	
57.0	53.0	322	223	321	229	321	233	316	233	316	233	316	233	316	233	222	222	221	222	25.3	
60.0	56.0	336	227	335	232	328	238	316	238	316	238	316	238	316	238	222	222	221	222	25.7	
90	-3.64	4.0	151	136	150	147	150	155	150	16.1	149	166	149	17.4	148	18.5	148	18.9	148	19.6	
	-1.84	4.0	151	139	153	150	152	158	152	16.3	152	168	151	17.6	151	18.0	151	18.7	151	19.1	19.9
	0.5	5.0	166	152	165	162	165	170	164	17.4	164	179	164	18.7	164	19.1	164	19.7	164	20.7	20.7
	9.5	5.0	172	157	172	162	175	171	180	170	18.0	170	185	170	19.3	170	19.7	170	20.5	170	21.5
	13.0	12.0	181	154	180	164	180	173	186	176	18.1	183	189	183	19.7	183	20.6	183	21.2	183	22.1
	15.0	14.0	186	158	185	168	185	175	184	184	18.4	184	194	184	194	184	20.6	184	21.2	184	21.8
	17.0	15.5	189	161	189	170	188	177	188	182	188	186	186	187	193	186	20.6	186	21.1	186	21.8
	19.0	18.0	196	166	195	175	195	182	194	186	194	191	194	197	192	192	21.4	192	21.7	192	22.2
	22.0	20.0	201	170	201	179	200	185	200	190	199	194	199	200	200	200	21.9	200	22.0	200	22.5
	30.0	28.0	225	185	224	200	224	203	223	203	223	206	223	212	223	212	222	222	221	222	23.0
	35.0	32.0	237	192	237	203	237	209	237	209	237	212	236	218	236	218	222	222	221	222	23.3
	40.0	36.0	249	198	249	209	249	216	249	216	249	216	249	216	249	216	222	222	221	222	23.7
47.0	43.0	279	210	278	216	278	221	277	221	277	221	277	221	277	221	222	222	221	222	24.1	
51.0	47.0	295	216	295	221	294	226	294	226	294	226	294	226	294	226	222	222	221	222	24.5	
54.0	50.0	308	220	308	225	307	229	307	229	307	229	307	229	307	229	222	222	221	222	24.9	
57.0	53.0	322	223	321	229	321	233	316	233	316	233	316	233	316	233	222	222	221	222	25.3	
60.0	56.0	336	227	335	232	328	238	316	238	316	238	316	238	316	238	222	222	221	222	25.7	
80	-3.64	4.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	-1.84	4.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	0.5	5.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	9.5	5.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	13.0	12.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	15.0	14.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	17.0	15.5	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	19.0	18.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	22.0	20.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	30.0	28.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	35.0	32.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
	40.0	36.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	
47.0	43.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150		
51.0	47.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150		
54.0	50.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150		
57.0	53.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150		
60.0	56.0	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150	150		

Combit-nation (%)	Outdoor air temp. (F/WB)	Indoor air temp. F/DB												Heating capacity							
		61			65			70			75										
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH								
130	-3.64	4.0	151	136	150	147	150	155	150	16.1	149	166	149	17.4	148	18.5	148	18.9	148	19.6	
	-1.84	4.0	151	139	153	150	152	158	152	16.3	152	168	151	17.6	151	18.0	151	18.7	151	19.1	19.9
	0.5	5.0	166	152	165	162	165	170	164	17.4	164	179	164	18.7	164	19.1	164	19.7	164	20.7	20.7
	9.5	5.0	172	157	172	162	175	171	180	170	18.0	170	185	170	19.3	170	19.7	170	20.5	170	21.5
	13.0	12.0	181	154	180	164	180	173	186	176	18.1	183	189	183	19.7	183	20.6	183	21.2	183	22.1
	15.0	14.0	186	158	185	168	185	175	184	184	18.4	184	194	184	194	184	20.6	184	21.2	184	21.8
	17.0	15.5	189	161	189	170	188	177	188	182	188	186	186	187	193	186	20.6	186	21.1	186	21.8
	19.0	18.0	196	166	195	175	195	182	194	186	194	191	194	197	192	192	21.4	192	21.7	192	22.2
	22.0	20.0	201	170	201	179															

Heating capacity

Comb- ration (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB																										
		61			65			68			70			72			75											
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH									
70	-3.64	-4.0	147	20.7	21.3	146	21.8	146	22.1	146	22.3	140	22.3	132	20.8	-1.84	-2.2	149	21.3	148	21.8	148	22.1	148	22.4	148	22.9	
	-1.84	-2.2	150	20.9	21.5	149	22.0	149	22.3	149	22.6	140	22.6	132	21.5	-0.5	5.0	161	21.5	151	21.7	146	20.7	140	21.9	148	22.3	
	0.5	8.5	162	21.6	22.2	150	22.1	150	22.4	150	22.7	140	22.7	132	21.0	1.0	15.0	170	22.2	151	21.8	149	22.0	149	22.3	150	22.6	
	13.0	12.0	176	22.4	23.0	164	22.9	164	23.3	170	23.7	164	24.1	164	20.0	1.5	18.5	182	23.1	165	23.0	170	23.3	170	23.7	164	24.1	
	15.0	14.0	176	22.4	23.0	164	22.9	164	23.3	170	23.7	164	24.1	164	20.0	2.0	21.0	194	23.2	165	23.1	170	23.4	170	23.8	164	24.2	
	17.0	15.5	185	22.8	23.4	176	23.3	176	23.7	181	24.3	176	24.7	176	21.2	2.5	24.0	206	23.5	177	23.2	181	24.0	181	24.4	176	24.8	
	19.0	18.0	191	23.1	23.7	186	23.6	186	24.0	191	24.6	186	25.0	186	21.2	3.0	27.0	218	23.8	187	23.5	191	24.2	191	24.6	186	25.1	
	22.0	20.0	197	23.3	24.0	196	23.8	196	24.2	201	24.8	196	25.2	196	21.2	3.5	30.0	230	24.1	201	23.8	201	24.4	201	24.8	196	25.2	
	26.0	24.0	198	22.0	22.6	204	22.4	204	22.8	209	23.4	204	23.8	204	21.2	4.0	33.0	242	22.1	205	22.6	209	23.0	209	23.4	204	23.8	
	30.0	28.0	198	20.5	21.1	190	20.9	190	21.3	195	21.9	190	22.3	190	21.2	4.5	36.0	254	20.6	199	21.1	195	21.4	195	21.8	190	22.2	
	35.0	32.0	198	19.1	19.7	186	19.5	186	19.9	191	19.3	186	19.7	186	21.2	5.0	39.0	266	19.2	197	19.0	191	19.1	191	19.4	186	20.0	
	39.0	36.0	198	17.8	18.4	186	18.2	186	18.6	188	18.0	186	18.4	186	21.2	5.5	42.0	278	19.3	197	18.9	191	18.9	191	19.2	186	20.5	
44.0	40.0	198	16.5	17.1	186	16.9	186	17.3	188	16.6	186	17.0	186	21.2	6.0	45.0	290	19.8	197	18.4	189	18.9	189	19.0	186	20.8		
47.0	43.0	198	15.2	15.8	186	16.6	186	17.0	191	15.9	186	16.2	186	21.2	6.5	48.0	302	20.3	197	18.1	191	18.9	191	19.0	186	21.1		
51.0	47.0	198	14.8	15.4	186	16.2	186	16.6	191	15.5	186	16.0	186	21.2	7.0	51.0	314	20.8	197	18.0	191	18.9	191	19.0	186	21.0		
54.0	50.0	198	14.1	14.7	186	16.1	186	16.5	191	15.8	186	16.3	186	21.2	7.5	54.0	326	21.3	197	18.0	191	18.9	191	19.0	186	20.9		
57.0	53.0	198	13.4	14.0	186	15.8	186	16.2	191	15.1	186	15.5	186	21.2	8.0	57.0	338	21.8	197	18.0	191	18.9	191	19.0	186	20.8		
60.0	56.0	198	12.8	13.4	186	15.1	186	15.5	191	14.4	186	14.8	186	21.2	8.5	60.0	350	22.3	197	18.0	191	18.9	191	19.0	186	20.7		
60	-3.64	-4.0	146	22.1	22.7	146	23.1	146	23.3	140	23.3	140	23.3	132	20.8	-1.84	-2.2	148	22.8	148	23.2	146	22.9	140	21.9	132	20.3	
	-1.84	-2.2	149	22.3	22.9	151	22.8	148	23.2	146	23.0	140	23.0	132	20.3	-0.5	5.0	161	23.1	151	21.7	146	20.7	140	21.8	132	19.5	
	0.5	8.5	162	23.3	23.9	159	23.7	151	24.1	146	23.9	140	23.9	132	20.3	1.0	15.0	170	23.5	151	21.8	146	20.8	140	21.9	132	19.6	
	13.0	12.0	176	23.4	24.0	168	24.2	159	24.6	151	24.4	140	24.4	132	20.3	1.5	18.5	182	23.8	151	21.9	146	20.9	140	22.0	132	19.7	
	15.0	14.0	170	21.7	22.3	159	20.1	151	18.9	146	18.9	140	17.3	132	16.2	2.0	21.0	194	23.9	151	22.0	146	21.0	140	22.1	132	19.8	
	17.0	15.5	170	21.2	21.8	159	19.6	151	18.4	146	17.6	140	16.9	132	15.8	2.5	24.0	206	24.0	151	22.1	146	21.1	140	22.2	132	19.9	
	19.0	18.0	170	20.3	20.9	159	18.8	151	17.7	146	16.9	140	16.2	132	15.2	3.0	27.0	218	24.1	151	22.2	146	21.2	140	22.3	132	20.0	
	22.0	20.0	170	19.6	20.2	159	18.2	151	17.1	146	16.4	140	15.7	132	14.7	3.5	30.0	230	24.2	151	22.3	146	21.3	140	22.4	132	20.1	
	26.0	24.0	170	18.3	18.9	159	17.0	151	16.0	146	15.4	140	14.7	132	13.8	4.0	33.0	242	24.3	151	22.4	146	21.4	140	22.5	132	20.2	
	30.0	28.0	170	17.1	17.7	159	15.9	151	15.0	146	14.4	140	13.8	132	12.9	4.5	36.0	254	24.4	151	22.5	146	21.5	140	22.6	132	20.3	
	35.0	32.0	170	16.0	16.6	159	14.9	151	14.0	146	13.5	140	12.9	132	12.1	5.0	39.0	266	24.5	151	22.6	146	21.6	140	22.7	132	20.4	
	39.0	36.0	170	15.0	15.6	159	13.9	151	13.1	146	12.6	140	12.1	132	11.4	5.5	42.0	278	24.6	151	22.7	146	21.7	140	22.8	132	20.5	
44.0	40.0	170	14.0	14.6	159	13.0	151	12.2	146	11.9	140	11.4	132	10.7	6.0	45.0	290	24.7	151	22.8	146	21.8	140	22.9	132	20.6		
47.0	43.0	170	13.7	14.3	159	12.7	151	11.9	146	11.7	140	11.2	132	10.6	6.5	48.0	302	24.8	151	22.9	146	21.9	140	23.0	132	20.7		
51.0	47.0	170	12.5	13.1	159	11.7	151	11.0	146	10.8	140	10.2	132	9.63	7.0	51.0	314	24.9	151	23.0	146	22.0	140	23.1	132	20.8		
54.0	50.0	170	11.9	12.5	159	11.1	151	10.5	146	10.2	140	9.78	132	9.22	7.5	54.0	326	25.0	151	23.1	146	22.1	140	23.2	132	20.9		
57.0	53.0	170	11.4	12.0	159	10.6	151	10.1	146	9.72	140	9.36	132	8.83	8.0	57.0	338	25.1	151	23.2	146	22.2	140	23.3	132	21.0		
60.0	56.0	170	10.9	11.5	159	10.2	151	9.65	146	9.31	140	8.97	132	8.46	8.5	60.0	350	25.2	151	23.3	146	22.3	140	23.4	132	21.1		
50	-3.64	-4.0	142	22.6	23.2	133	20.9	126	19.6	122	18.8	117	18.0	110	16.8	-1.84	-2.2	142	22.1	133	20.4	126	19.2	122	18.4	117	17.6	110
	-1.84	-2.2	142	22.1	22.7	133	20.4	126	19.2	122	18.4	117	17.6	110	16.4	-0.5	5.0	142	20.0	133	18.5	126	17.5	122	16.7	117	16.0	110
	0.5	8.5	142	19.0	19.6	133	17.6	126	16.6	122	15.9	117	15.3	110	14.3	1.0	15.0	142	18.0	133	16.7	126	16.6	122	16.1	117	14.5	
	13.0	12.0	142	18.0	18.6	133	16.7	126	15.8	122	15.1	117	14.5	110	13.6	1.5	18.5	154	19.1	133	16.8	126	16.7	122	16.2	117	14.6	
	15.0	14.0	142	17.3	17.9	133	15.8	126	14.9	122	14.3	117	13.8	110	12.6	2.0	21.0	166	19.2	133	16.9	126	16.8	122	16.3	117	14.7	
	17.0	15.5	142	16.4	17.0	133	15.2	126	14.4	122	13.8	117	13.2	110	12.0	2.5	24.0	178	19.3	133	17.0	126	16.9	122	16.4	117	14.8	
	19.0	18.0	142	15.9	16.5	133	14.8	126	13.9	122	13.4	117	12.8	110	11.3	3.0	27.0	190	19.4	133	17.1	126	17.0	122	16.5	117	14.9	
	22.0	20.0	142	14.9	15.5	133	13.8	126	13.1	122	12.6	117	12.1	110	10.7	3.5	30.0	202	19.5	133	17.2	126	17.1	122	16.6	117	15.0	
	26.0	24.0	142	13.9	14.5	133	13.0	126	12.3	122	11.8	117	11.3	110	10.0	4.0	33.0	214	19.6	133	17.3	126	17.2	122				

REYQ240PYDN

Combit-nation (%)	Outdoor air temp. (F/WB)	Indoor air temp. F/DB												Heating capacity			
		61				65				70				72		75	
		TC	PI	MBH	KW	TC	PI	MBH	KW	TC	PI	MBH	KW	TC	PI	MBH	KW
100	-3.64	4.0	156	109	156	122	156	132	155	139	155	145	154	154	154	154	154
	-1.84	2.2	157	113	159	126	158	142	158	142	158	148	157	158	155	155	155
	0.5	5.5	177	137	179	148	178	160	177	163	177	162	177	177	177	177	177
	9.5	8.5	191	148	193	162	186	169	185	175	185	185	185	185	185	185	185
	13.0	12.0	187	145	186	156	186	164	186	169	185	175	185	185	185	185	185
	15.0	14.0	192	149	191	166	191	168	190	173	190	179	189	187	187	187	187
	17.0	15.5	196	153	195	163	194	171	194	176	194	182	193	189	189	189	189
	19.0	18.0	202	159	202	169	201	176	201	181	200	186	200	194	194	194	194
	22.0	20.0	208	163	207	183	207	180	208	185	206	190	205	197	197	197	197
	26.0	24.0	220	172	219	188	218	188	218	193	218	197	217	204	204	204	204
30.0	28.0	232	180	231	196	231	196	231	200	230	204	230	211	211	211	211	
35.0	32.0	246	188	244	204	244	207	244	211	243	217	243	217	217	217	217	
40.0	36.0	260	196	259	213	259	213	259	219	257	221	257	221	221	221	221	
45.0	40.0	274	203	275	221	274	221	274	227	274	235	274	235	235	235	235	
47.0	43.0	288	208	287	225	287	224	286	224	286	227	285	233	233	233	233	
51.0	47.0	305	215	304	231	304	226	303	229	303	233	302	238	238	238	238	
54.0	50.0	318	219	317	225	317	233	317	233	316	236	316	241	241	241	241	
57.0	53.0	332	223	331	229	331	233	330	237	330	240	319	232	232	232	232	
60.0	56.0	346	228	346	233	345	238	345	241	338	236	319	232	232	232	232	
90	-3.64	4.0	156	109	156	122	156	132	155	139	155	145	154	154	154	154	154
	-1.84	2.2	157	113	159	126	158	142	158	142	158	148	157	158	155	155	155
	0.5	5.5	177	137	179	148	178	160	177	163	177	162	177	177	177	177	177
	9.5	8.5	191	148	193	162	186	169	185	175	185	185	185	185	185	185	185
	13.0	12.0	187	145	186	156	186	164	186	169	185	175	185	185	185	185	185
	15.0	14.0	192	149	191	166	191	168	190	173	190	179	189	187	187	187	187
	17.0	15.5	196	153	195	163	194	171	194	176	194	182	193	189	189	189	189
	19.0	18.0	202	159	202	169	201	176	201	181	200	186	200	194	194	194	194
	22.0	20.0	208	163	207	183	207	180	208	185	206	190	205	197	197	197	197
	26.0	24.0	220	172	219	188	218	188	218	193	218	197	217	204	204	204	204
30.0	28.0	232	180	231	196	231	196	231	200	230	204	230	211	211	211	211	
35.0	32.0	246	188	244	204	244	207	244	211	243	217	243	217	217	217	217	
40.0	36.0	260	196	259	213	259	213	259	219	257	221	257	221	221	221	221	
45.0	40.0	274	203	275	221	274	221	274	227	274	235	274	235	235	235	235	
47.0	43.0	288	208	287	225	287	224	286	224	286	227	285	233	233	233	233	
51.0	47.0	304	213	303	229	303	230	302	236	302	239	294	234	234	234	234	
54.0	50.0	317	217	316	233	316	237	316	240	312	239	294	222	222	222	222	
57.0	53.0	331	221	331	236	330	241	324	237	312	226	294	211	211	211	211	
60.0	56.0	345	225	345	240	336	235	324	225	312	215	294	200	200	200	200	
80	-3.64	4.0	155	108	155	121	155	131	154	138	154	144	153	153	153	153	153
	-1.84	2.2	156	112	158	125	157	141	157	141	157	148	156	156	156	156	156
	0.5	5.5	176	136	178	149	178	161	177	164	177	162	177	177	177	177	177
	9.5	8.5	190	147	192	161	187	174	186	176	191	175	188	188	188	188	188
	13.0	12.0	186	144	187	157	187	165	186	167	186	176	186	186	186	186	186
	15.0	14.0	191	148	190	162	190	169	185	179	189	189	189	189	189	189	189
	17.0	15.5	195	152	194	166	194	175	194	182	193	192	193	193	193	193	193
	19.0	18.0	201	157	201	167	200	182	200	192	200	196	200	196	196	196	196
	22.0	20.0	207	161	206	171	206	184	206	191	205	200	205	207	207	207	207
	26.0	24.0	219	168	218	182	218	198	217	202	217	207	213	213	213	213	213
30.0	28.0	231	174	231	193	230	205	230	209	230	219	229	219	219	219	219	
35.0	32.0	245	180	244	206	244	212	243	215	243	219	243	215	215	215	215	
40.0	36.0	259	188	258	212	258	221	258	221	258	225	257	230	230	230	230	
45.0	40.0	273	196	272	220	272	224	272	227	272	235	272	235	235	235	235	
47.0	43.0	287	201	286	224	286	224	286	224	286	227	284	234	234	234	234	
51.0	47.0	304	206	303	229	303	230	302	236	302	239	294	234	234	234	234	
54.0	50.0	317	211	316	233	316	237	316	240	312	239	294	222	222	222	222	
57.0	53.0	331	215	331	236	330	241	324	237	312	226	294	211	211	211	211	
60.0	56.0	345	219	345	240	336	235	324	225	312	215	294	200	200	200	200	

Combit-nation (%)	Outdoor air temp. (F/WB)	Indoor air temp. F/DB												Heating capacity			
		61				65				70				72		75	
		TC	PI	MBH	KW	TC	PI	MBH	KW	TC	PI	MBH	KW	TC	PI	MBH	KW
130	-3.64	4.0	156	109	156	122	156	132	155	139	155	145	154	154	154	154	154
	-1.84	2.2	157	113	159	126	158	142	158	142	158	148	157	158	155	155	155
	0.5	5.5	177	137	179	148	178	160	177	163	177	162	177	177	177	177	177
	9.5	8.5	191	148	193	162	186	169	185	175	185	185	185	185	185	185	185
	13.0	12.0	187	145	186	156	186	164	186	169	185	175	185	185	185	185	185
	15.0	14.0	192	149	191	166	191	168	190	173	190	179	189	187	187	187	187
	17.0	15.5	196	153	195	163	194	171	194	176	194	182	193	189	189	189	189
	19.0	18.0	202	159	202	169	201	176	201	181	200	186	200	194	194	194	194
	22.0	20.0	208	163	207	183	207	180	208	185	206	190	205	197	197	197	197
	26.0	24.0	220	172	219	188	218	188	218	193	218	197	217	204	204	204	204
30.0	28.0	232	180	231	196	231	196	231	200	230	204	230	211	211	211	211	
35.0	32.0	246	188	244	204	244	207	244	211	243	217	243	217	217	217	217	
40.0	36.0	260	196	259	213	259	213	259	219	257	221	257	221	221	221	221	
45.0	40.0	274	203	275	221	274	221	274	227	274	235	274	235	235	235	235	
47.0	43.0	288	208	287	225	287	224	286	224	286	227						

Heating capacity

Combustion (%)	Outdoor air temp. (F/DB)	Indoor air Temp. F/DB															
		61			65			70			75						
		TC	PI	MBH	TC	PI	MBH	TC	PI	MBH	TC	PI	MBH				
70	-3.64	-4.0	152	20.5	21.2	151	21.7	151	22.1	150	23.2	150	23.5	150	23.8	147	23.6
	-1.84	-2.2	154	20.7	21.4	154	21.9	154	22.1	151	23.3	153	23.6	153	23.9	147	23.1
	0.5	0.5	154	20.7	21.4	154	21.9	154	22.1	151	23.3	153	23.6	153	23.9	147	23.1
	5.5	8.5	157	21.6	22.6	156	22.7	156	22.9	152	23.5	156	23.8	156	24.1	147	23.4
	13.0	12.0	162	22.5	23.0	161	23.5	161	23.8	161	24.1	162	24.4	162	147	23.7	22.6
	17.0	14.0	187	22.7	23.3	186	23.7	186	24.0	189	24.3	189	24.6	189	24.9	172	21.9
	19.0	15.5	191	22.9	23.5	190	23.9	189	24.1	189	24.4	189	24.7	189	25.0	172	21.4
	22.0	20.0	203	23.2	24.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	21.0
	26.0	24.0	214	23.9	24.6	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	20.5
	30.0	28.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	19.9
	35.0	32.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	19.4
	39.0	36.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	18.6
44.0	40.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	17.4	
47.0	43.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	16.3	
51.0	47.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	15.2	
54.0	50.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	14.5	
57.0	53.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	13.6	
60.0	56.0	220	24.3	25.0	196	24.1	189	24.3	189	24.6	189	24.9	189	25.2	172	12.8	
60	-3.64	-4.0	151	22.1	150	22.7	150	23.2	150	23.2	150	23.5	150	23.8	147	23.6	
	-1.84	-2.2	153	22.3	153	22.9	153	23.3	153	23.3	153	23.6	153	23.9	147	23.1	
	0.5	5.0	166	23.0	166	23.6	165	24.0	162	23.5	156	22.5	156	22.5	147	21.0	
	5.5	8.5	174	23.4	173	23.8	168	23.4	162	23.3	156	22.5	156	22.5	147	20.0	
	13.0	14.0	186	24.0	177	22.8	168	21.4	162	20.2	156	20.2	147	18.9	18.3		
	17.0	15.5	189	24.0	177	22.2	168	20.9	162	20.0	156	19.6	147	17.9	17.9		
	19.0	18.0	189	23.0	177	21.3	168	20.0	162	19.2	156	18.4	147	17.2	17.2		
	22.0	20.0	189	22.3	177	20.6	168	19.4	162	18.6	156	17.8	147	16.7	16.7		
	26.0	24.0	189	20.8	177	19.3	168	18.2	162	17.4	156	16.7	147	15.6	15.6		
	30.0	28.0	189	19.4	177	18.0	168	17.0	162	16.3	156	15.7	147	14.7	14.7		
	35.0	32.0	189	18.2	177	16.9	168	15.9	162	15.3	156	14.7	14.7	13.8	13.8		
	39.0	36.0	189	17.0	177	15.8	168	14.9	162	14.3	156	13.8	14.7	12.9	12.9		
44.0	40.0	189	15.9	177	14.4	168	13.9	162	13.4	156	12.9	14.7	12.1	12.1			
47.0	44.0	189	14.2	177	13.2	168	12.5	162	12.1	156	11.6	14.7	10.9	10.9			
51.0	47.0	189	14.2	177	13.2	168	12.0	162	11.5	156	11.1	14.7	10.5	10.5			
54.0	50.0	189	13.5	177	12.6	168	11.4	162	11.0	156	10.6	14.7	10.0	10.0			
57.0	53.0	189	12.9	177	12.1	168	11.4	162	11.0	156	10.6	14.7	10.0	10.0			
60.0	56.0	189	12.3	177	11.5	168	10.9	162	10.6	156	10.2	14.7	9.60	9.60			
50	-3.64	-4.0	150	23.7	147	23.7	140	22.2	135	21.3	130	20.4	123	19.0			
	-1.84	-2.2	153	23.8	147	23.2	140	21.8	135	20.9	130	20.0	123	18.6			
	0.5	5.0	157	22.7	147	21.0	140	19.8	135	19.0	130	18.2	123	17.0			
	5.5	8.5	157	21.6	147	20.0	140	18.8	135	18.1	130	17.3	123	16.2			
	13.0	12.0	157	20.5	147	18.4	140	17.9	135	17.2	130	16.4	123	15.4			
	17.0	14.0	184	19.4	147	17.0	140	16.9	135	16.3	130	15.6	123	14.6			
	19.0	15.5	157	19.4	147	18.0	140	16.9	135	16.3	130	15.6	123	14.6			
	22.0	20.0	157	18.6	147	17.3	140	16.3	135	15.7	130	15.0	123	14.1			
	26.0	20.0	157	18.0	147	16.7	140	15.8	135	15.2	130	14.6	123	13.7			
	30.0	28.0	157	16.9	147	15.7	140	14.8	135	14.3	130	13.7	123	12.9			
	35.0	32.0	157	15.8	147	14.7	140	13.9	135	13.4	130	12.9	123	12.1			
	39.0	36.0	157	14.8	147	13.8	140	13.1	135	12.6	130	12.1	123	11.4			
44.0	40.0	157	13.9	147	13.0	140	12.3	135	11.8	130	11.4	123	10.7				
47.0	44.0	157	13.0	147	12.2	140	11.6	135	11.1	130	10.7	123	10.1				
51.0	47.0	157	12.5	147	11.6	140	11.0	135	10.7	130	10.3	9.69	9.69				
54.0	50.0	157	11.7	147	11.1	140	10.4	135	10.3	130	9.98	123	8.75				
57.0	53.0	157	11.2	147	10.5	140	9.97	135	9.65	130	9.28	123	8.43				
60.0	56.0	157	10.7	147	10.0	140	9.63	135	9.25	130	8.91	123	8.10				

TC : Total capacity ; MBH

PI : Power Input ; kW (Comp.+Outdoor fan motor)


Note1 : is shown as reference.

When selecting the unit models, avoid the Outdoor air temperature range shown by


8.3 Capacity Correction Factor

REYQ72PYDN

1. Rate of change in cooling capacity

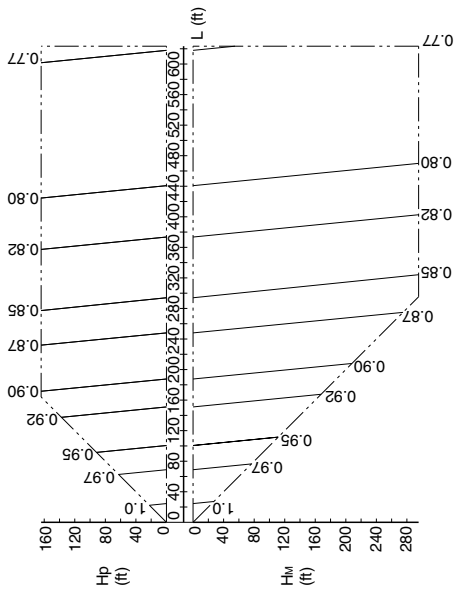

2. Rate of change in heating capacity

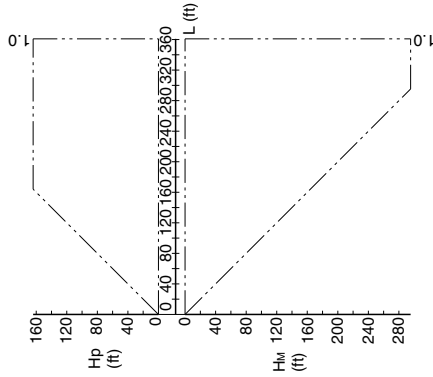

[Explanation of symbols]
 Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
 Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
 L : Equivalent pipe length (ft)
 α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ72PYDN	φ 3/8
REYQ72PTJU	φ 5/8
REYQ216PYDN	φ 5/8
REYQ216PTJU	φ 5/8

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units

• Condition: Indoor unit combination ratio does not exceed 100%.

[Maximum A/C capacity of outdoor units] = [A/C capacity of outdoor units obtained from capacity characteristic table at the 100% combination] × [Capacity change rate due to piping length to the farthest indoor unit]

• Condition: Indoor unit combination ratio exceeds 100%.

[Maximum A/C capacity of outdoor units] = [A/C capacity of outdoor units obtained from capacity characteristic table at the combination] × [Capacity change rate due to piping length to the farthest indoor unit]

- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased. When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.

[Diameter of above case]

Model	liquid
REYQ72PYDN	φ 1/2
REYQ72PTJU	φ 3/4
REYQ216PYDN	φ 3/4
REYQ216PTJU	φ 3/4


- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

Overall equivalent length = Equivalent length to main pipe × Correction factor + Equivalent length after branching

[Choose a correction factor from the following table]

Model	Correction factor
REYQ72PYDN	0.2
REYQ72PTJU	0.2
REYQ216PYDN	0.4
REYQ216PTJU	0.4

(Example) In case of REYQ216PYDN



In the above case (Heating)


Overall equivalent length = 200ft × 0.4 + 100ft = 180ft

The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

Overall equivalent length = Equivalent length to main pipe × 0.5 + Equivalent length after branching

(Example)



In the above case (Cooling)


Overall equivalent length = 200ft × 0.5 + 100ft = 200ft

The correction factor in capacity when Hp = 0m is thus approximately 0.86.


3D058626

REYQ96PYDN

1. Rate of change in cooling capacity

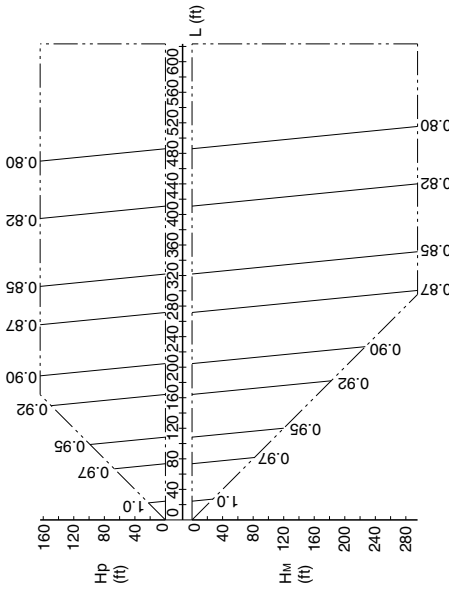

2. Rate of change in heating capacity

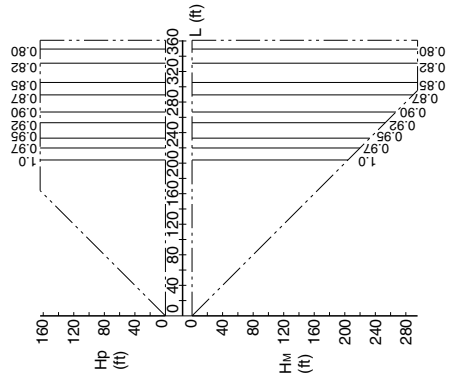

[Explanation of symbols]

- Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
- Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
- L : Equivalent pipe length (ft)
- α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ96PYDN	φ 3/8
REYQ96PTJU	φ 3/8

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.

Calculating A/C capacity of outdoor units

- Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \left[\frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \right] \times 100\%$$

- Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \left[\frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \right] \times 100\%$$

- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.

When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.


[Diameter of above case]

Model	liquid
REYQ96PYDN	φ 1/2
REYQ96PTJU	φ 1/2

- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.2 + \text{Equivalent length after branching}$$

(Example)



In the above case (Heating)


$$\text{Overall equivalent length} = 200\text{ft} \times 0.2 + 100\text{ft} = 140\text{ft}$$

The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.5 + \text{Equivalent length after branching}$$

(Example)



In the above case (Cooling)


$$\text{Overall equivalent length} = 200\text{ft} \times 0.5 + 100\text{ft} = 200\text{ft}$$

The correction factor in capacity when Hp = 0ft is thus approximately 0.88.


3D058627

REYQ120PYDN

1. Rate of change in cooling capacity

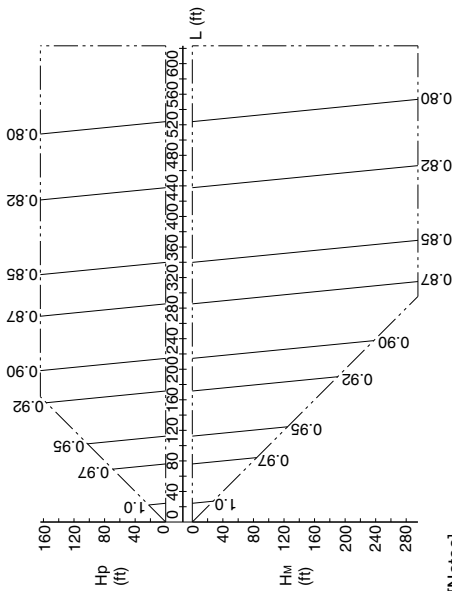

2. Rate of change in heating capacity

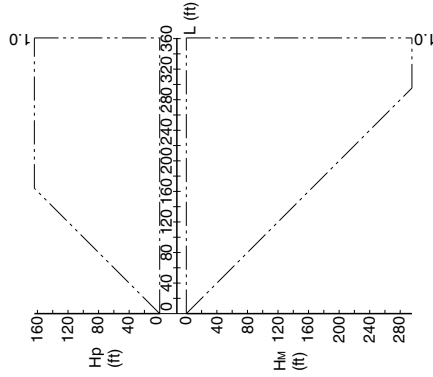

[Explanation of symbols]

- Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
- Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
- L : Equivalent pipe length (ft)
- α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ120PYDN	φ 1/2
REYQ120PTJU	φ 5/8
REYQ168PYDN	φ 5/8
REYQ168PTJU	φ 5/8

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
Calculating A/C capacity of outdoor units

• Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of outdoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}} \times \left[\frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \right]$$

• Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of outdoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}} \times \left[\frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \right]$$

- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.

[Diameter of above case]

Model	liquid
REYQ120PYDN	φ 5/8
REYQ120PTJU	φ 3/4
REYQ168PYDN	φ 3/4
REYQ168PTJU	φ 3/4


- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times \text{Correction factor} + \text{Equivalent length after branching}$$

[Choose a correction factor from the following table]

Model	Correction factor
REYQ120PYDN	0.3
REYQ120PTJU	0.3
REYQ168PYDN	0.4
REYQ168PTJU	0.4

(Example) In case of REYQ18PY1



In the above case (Heating)


$$\text{Overall equivalent length} = 200\text{ft} \times 0.4 + 100\text{ft} = 180\text{ft}$$

The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.5 + \text{Equivalent length after branching}$$

(Example)



In the above case (Cooling)


$$\text{Overall equivalent length} = 200\text{ft} \times 0.5 + 100\text{ft} = 200\text{ft}$$

The correction factor in capacity when Hp = 0ft is thus approximately 0.88.


3D058628

REYQ144PYDN

1. Rate of change in cooling capacity

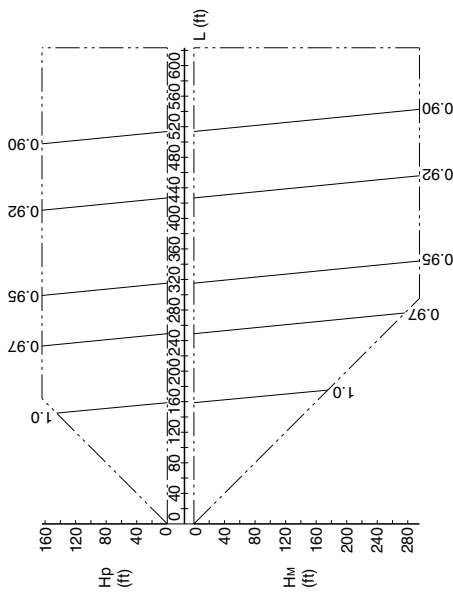

2. Rate of change in heating capacity

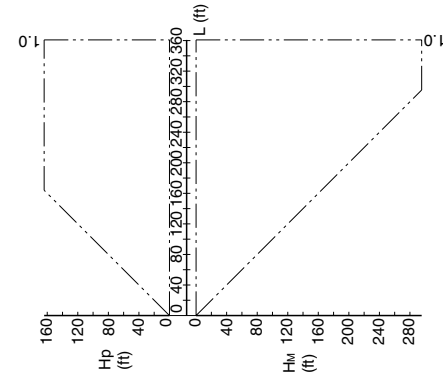

[Explanation of symbols]
 Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
 Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
 L : Equivalent pipe length (ft)
 α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ144PYDN	φ 1/2
REYQ144PTJU	φ 1/2

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units
 • Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \times 100\%$$
 • Condition: Indoor unit combination ratio exceeds 100%.


$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \times 100\%$$
- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
 When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]

Model	liquid
REYQ144PYDN	φ 5/8
REYQ144PTJU	φ 5/8

5. When the main sections of the intermit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

Overall equivalent length = Equivalent length to main pipe × 0.3 + Equivalent length after branching

(Example)




In the above case (Heating)
 Overall equivalent length = 200ft × 0.3 + 100ft = 160ft
 The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

6. In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

Overall equivalent length = Equivalent length to main pipe × 0.5 + Equivalent length after branching


(Example)




In the above case (Cooling)
 Overall equivalent length = 200ft × 0.5 + 100ft = 200ft
 The correction factor in capacity when Hp = 0ft is thus approximately 0.96.

REYQ168PYDN

1. Rate of change in cooling capacity

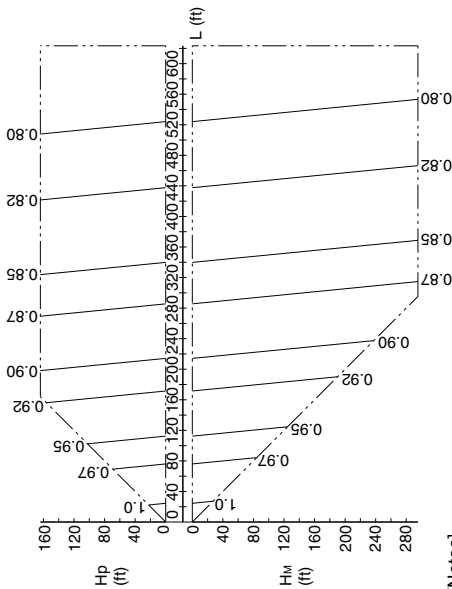

2. Rate of change in heating capacity

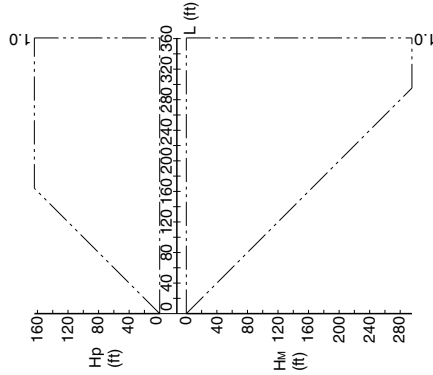

[Explanation of symbols]

- Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
- Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
- L : Equivalent pipe length (ft)
- α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ120PYDN REYQ120PTJU	φ 1/2
REYQ168PYDN REYQ168PTJU	φ 5/8

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
Calculating A/C capacity of outdoor units

• Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100% combination}}{\text{A/C capacity of indoor units obtained from capacity characteristic table at the 100% combination}} \times \left[\frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \right]$$

• Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{A/C capacity of indoor units obtained from capacity characteristic table at the combination}} \times \left[\frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \right]$$

- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.

[Diameter of above case]

Model	liquid
REYQ120PYDN REYQ120PTJU	φ 5/8
REYQ168PYDN REYQ168PTJU	φ 3/4


- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times \text{Correction factor} + \text{Equivalent length after branching}$$

[Choose a correction factor from the following table]

Model	Correction factor
REYQ120PYDN REYQ120PTJU	0.3
REYQ168PYDN REYQ168PTJU	0.4

(Example) In case of REYQ18PY1



In the above case (Heating)


$$\text{Overall equivalent length} = 200\text{ft} \times 0.4 + 100\text{ft} = 180\text{ft}$$

The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

$$\text{Overall equivalent length} = \text{Equivalent length to main pipe} \times 0.5 + \text{Equivalent length after branching}$$

(Example)



In the above case (Cooling)


$$\text{Overall equivalent length} = 200\text{ft} \times 0.5 + 100\text{ft} = 200\text{ft}$$

The correction factor in capacity when Hp = 0ft is thus approximately 0.88.


3D058628

REYQ192PYDN

1. Rate of change in cooling capacity

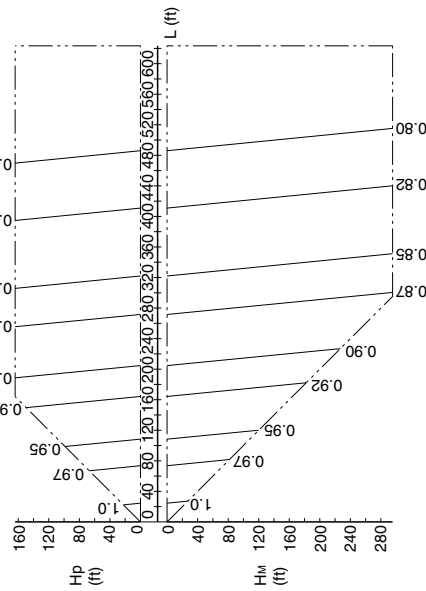

2. Rate of change in heating capacity

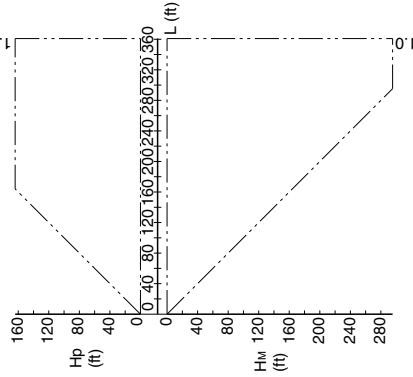

[Explanation of symbols]
 Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
 Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
 L : Equivalent pipe length (ft)
 α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ192PYDN	φ 5/8
REYQ192PTJU	

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units

- Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}} \times \frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}$$
- Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{Maximum A/C capacity of indoor units}} \right] = \frac{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination}}{\text{Capacity change rate due to piping length to the farthest indoor unit}}$$


- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
 When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]

Model	liquid
REYQ192PYDN	φ 3/4
REYQ192PTJU	

- When the main sections of the intermit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

Overall equivalent length = Equivalent length to main pipe × 0.4 + Equivalent length after branching

(Example)




In the above case (Heating)
 Overall equivalent length = 200ft × 0.4 + 100ft = 180ft
 The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

Overall equivalent length = Equivalent length to main pipe × 0.5 + Equivalent length after branching


(Example)




In the above case (Cooling)
 Overall equivalent length = 200ft × 0.5 + 100ft = 200ft
 The correction factor in capacity when Hp = 0ft is thus approximately 0.88.

REYQ216PYDN

1. Rate of change in cooling capacity

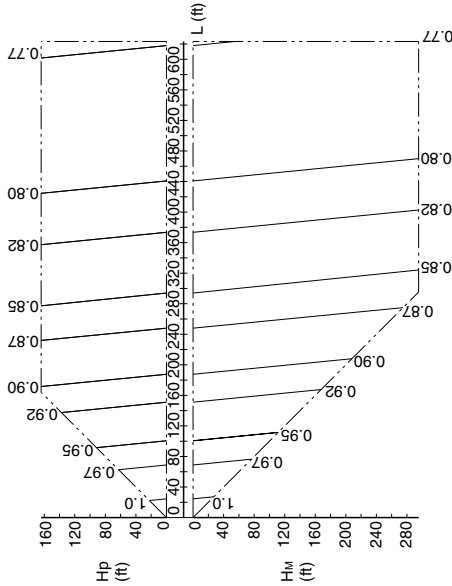

2. Rate of change in heating capacity

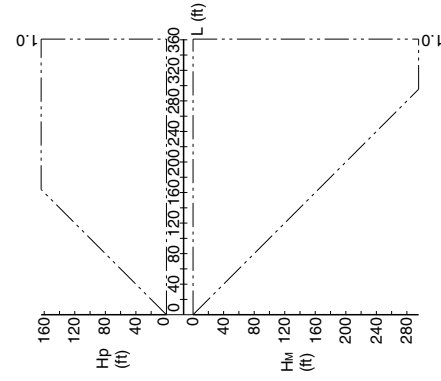

[Explanation of symbols]
 Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
 Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
 L : Equivalent pipe length (ft)
 α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ72PYDN REYQ72PTJU	φ 3/8
REYQ216PYDN REYQ216PTJU	φ 5/8

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
 The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
 Calculating A/C capacity of outdoor units

• Condition: Indoor unit combination ratio does not exceed 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the 100\% combination}} \right] \times \left[\frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination farthest indoor unit}} \right]$$

• Condition: Indoor unit combination ratio exceeds 100%.

$$\left[\frac{\text{Maximum A/C capacity of outdoor units}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination farthest indoor unit}} \right] \times \left[\frac{\text{Capacity change rate due to piping length to the farthest indoor unit}}{\text{A/C capacity of outdoor units obtained from capacity characteristic table at the combination farthest indoor unit}} \right]$$

- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.
 When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.


Model	liquid
REYQ72PYDN REYQ72PTJU	φ 1/2
REYQ216PYDN REYQ216PTJU	φ 3/4

- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

Overall equivalent length = Equivalent length to main pipe x Correction factor + Equivalent length after branching
 [Choose a correction factor from the following table]

Model	Correction factor
REYQ72PYDN REYQ72PTJU	0.2
REYQ216PYDN REYQ216PTJU	0.4


(Example) In case of REYQ216PYDN



In the above case (Heating)
 Overall equivalent length = 200ft x 0.4 + 100ft = 180ft
 The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

Overall equivalent length = Equivalent length to main pipe x 0.5 + Equivalent length after branching




In the above case (Cooling)
 Overall equivalent length = 200ft x 0.5 + 100ft = 200ft
 The correction factor in capacity when Hp = 0m is thus approximately 0.86.


3D058626

REYQ240PYDN

1. Rate of change in cooling capacity

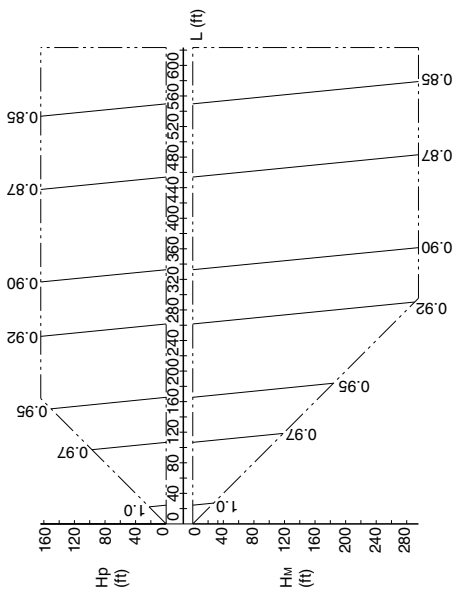

2. Rate of change in heating capacity

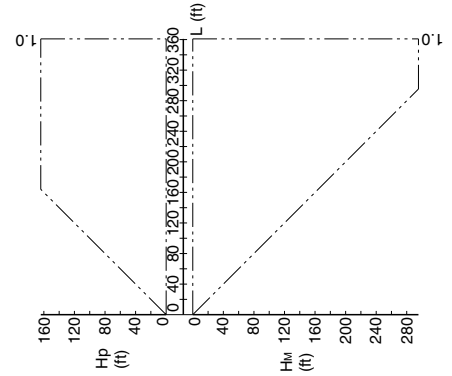

[Explanation of symbols]

- Hp : Level difference (ft) between indoor and outdoor units where indoor unit in inferior position
- Hm : Level difference (ft) between indoor and outdoor units where indoor unit in superior position
- L : Equivalent pipe length (ft)
- α : Capacity correction factor

[Diameter of pipe (standard size)]

Model	liquid
REYQ240PYDN	φ 5/8
REYQ240PTJU	

[Notes]

- These figures illustrate the rate of change in capacity of a standard indoor unit system at maximum load (with the thermostat set to maximum) under standard conditions. Moreover, under partial load conditions there is only a minor deviation from the rate of change in capacity shown in the above figures.
- With this outdoor unit, evaporating pressure constant control when cooling, and condensing pressure constant control when heating is carried out.
- Method of calculating A/C (cooling/heating) capacity:
The maximum A/C capacity of the system will be either the total A/C capacity of the indoor units obtained from capacity characteristic table or the maximum A/C capacity of outdoor units as mentioned below, whichever smaller.
Calculating A/C capacity of outdoor units

- Condition: Indoor unit combination ratio does not exceed 100%.

[Maximum A/C capacity of outdoor units] = A/C capacity of outdoor units obtained from capacity characteristic table at the 100% combination
 × Capacity change rate due to piping length to the farthest indoor unit

- Condition: Indoor unit combination ratio exceeds 100%.

[Maximum A/C capacity of outdoor units] = A/C capacity of outdoor units obtained from capacity characteristic table at the combination
 × Capacity change rate due to piping length to the farthest indoor unit

- When overall equivalent pipe length is 295.3ft or more, the diameter of the main liquid pipes (outdoor unit-branch sections) must be increased.


When level difference is 164.0ft or more, the diameter of the main liquid pipe (outdoor unit-branch sections) must be increased.
 [Diameter of above case]

Model	liquid
REYQ240PYDN	φ 3/4
REYQ240PTJU	

- When the main sections of the interunit liquid pipe diameters are increased the overall equivalent length should be calculated as follows. (Heating only)

Overall equivalent length = Equivalent length to main pipe × 0.4 + Equivalent length after branching

(Example)



In the above case (Heating)


Overall equivalent length = 200ft × 0.4 + 100ft = 180ft

The correction factor in capacity when Hp = 0ft is thus approximately 1.0.

- In the combination which does not include cooling only indoor unit, Calculate the equivalent length pipe by the following when you calculate cooling capacity.

Overall equivalent length = Equivalent length to main pipe × 0.5 + Equivalent length after branching

(Example)





In the above case (Cooling)

Overall equivalent length = 200ft × 0.5 + 100ft = 200ft

The correction factor in capacity when Hp = 0ft is thus approximately 0.91.

9. Operation Limits

REYQ72, 96, 120, 144, 168, 192, 216, 240PYDN

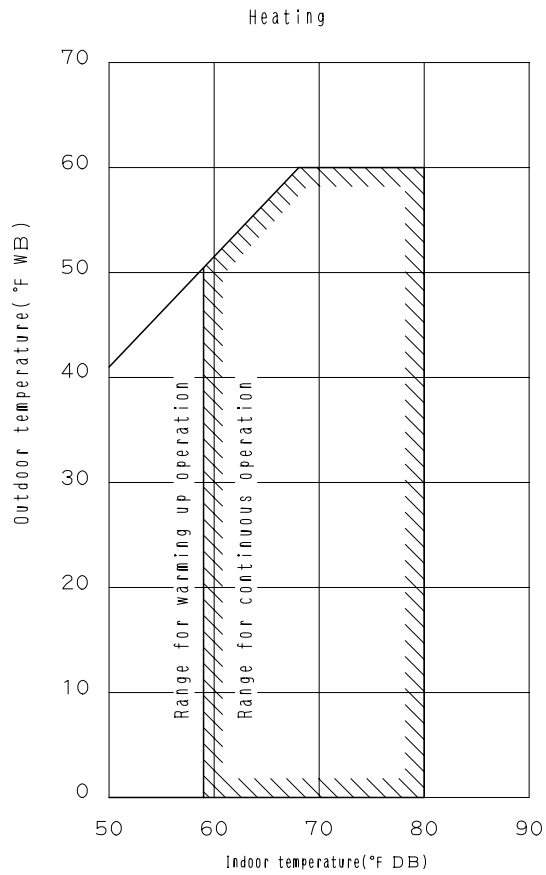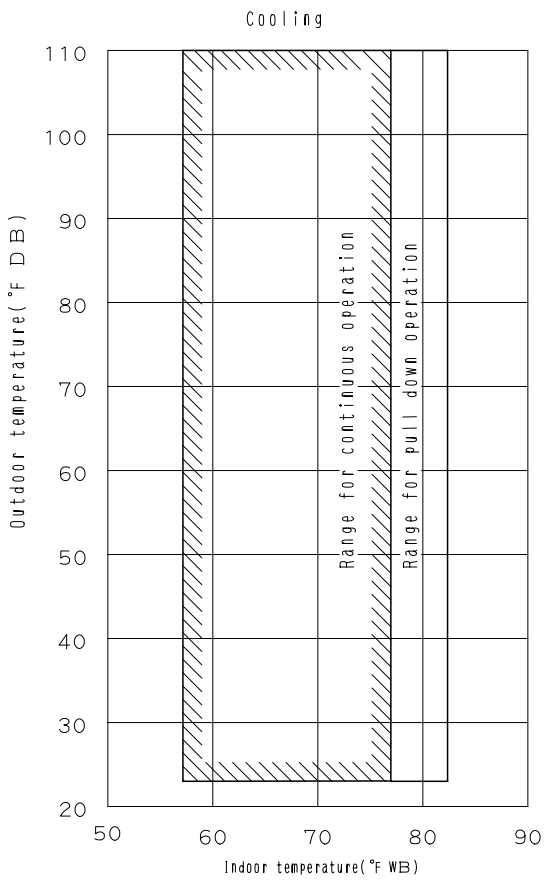

3D043026C

Notes:

These figures assume the following operating conditions :

Indoor and outdoor units :

Equivalent pipe length : 25ft


Level difference : 0ft

10. Sound Levels

Overall

Model	Power Supply	60Hz/460V
REYQ72PYDN		58
REYQ96PYDN		58
REYQ120PYDN		60
REYQ144PYDN		60
REYQ168PYDN		61
REYQ192PYDN		62
REYQ216PYDN		62
REYQ240PYDN		63

dBA

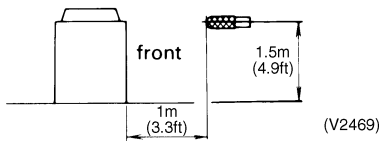

Note:


Sound level:

Anechoic chamber conversion value, measured at a point 3.3ft in front of the unit at a height of 4.9ft.


During actual operation, these values are normally somewhat higher as a result of ambient conditions.

Octave Band Level


REYQ72PYDN

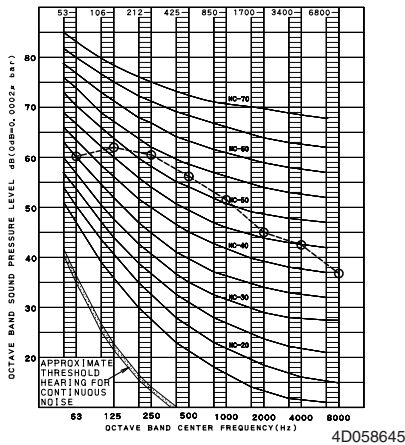

REYQ96PYDN

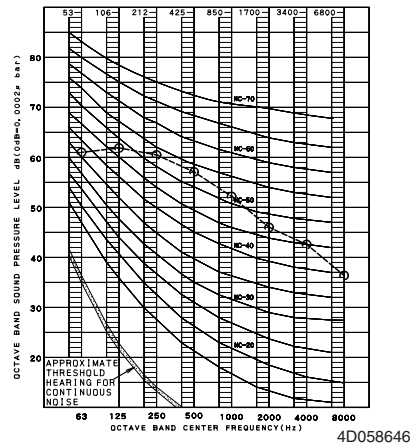

REYQ120PYDN

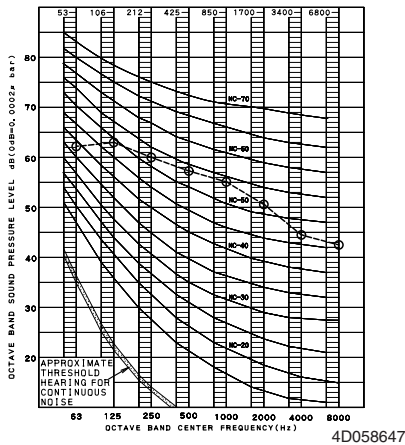

11. Accessories

Standard Accessories

REYQ72, 96, 120PYDN

Name		Liquid side accessory pipe (1)	Liquid side accessory pipe (2)	Suction gas side accessory pipe (1)			Suction gas side accessory pipe (2)		
Quantity	72P type	1 pc.	1 pc.	1 pc.			1 pc.		
	96P type						1 pc.		
	120P type					1 pc.			1 pc.
Shape									
				φ7/8	φ7/8	φ1-1/8	φ3/4	φ7/8	φ1-1/8






Name		HP / LP gas side accessory pipe (1)			HP / LP gas side accessory pipe (2)			L type accessory joint (1)	L type accessory joint (2)	accessory joint (2)
Quantity	72P type	1 pc.			1 pc.			1 pc.	1 pc.	1 pc.
	96P type				1 pc.					1 pc.
	120P type		1 pc.	1 pc.						
Shape										
		φ5/8	φ3/4	φ7/8	φ5/8	φ3/4	φ7/8	φ1	φ3/4	

Name	Clamp (1)	Clamp (2)	Vinyl tube	Manuals, etc.
Quantity	9 pcs.	3 pcs.	4 pcs.	1 pc. about each item
Shape				<ul style="list-style-type: none"> ■ Operation manual ■ Installation manual ■ "REQUEST FOR THE INDICATON" label (Installation records) ■ "ADDITIONAL REFRIGERANT CHARGE" label

REMQ72, 96, 120PYDN

Name	Clamp (1)	Clamp (2)	Clamp (3)	Vinyl tube	Manuals, etc.
Quantity	8 pcs.	2 pcs.	1 pc.	4 pcs.	1 pc. about each item
Shape					<ul style="list-style-type: none"> ■ Operation manual ■ Installation manual ■ "REQUEST FOR THE INDICATON" label (Installation records) ■ "ADDITIONAL REFRIGERANT CHARGE" label

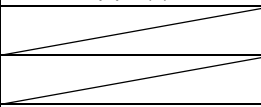Name		Liquid side accessory pipe (1)	Liquid side accessory pipe (2)	Suction gas side accessory pipe (1)		Suction gas side accessory pipe (2)		HP / LP gas side accessory pipe (1)		HP / LP gas side accessory pipe (2)
Quantity	72-96P type	1 pc.	1 pc.	1 pc.			1 pc.			2 pcs.
	120P type						1 pc.			1 pc.
Shape										
				φ7/8	φ1-1/8	φ7/8	φ1-1/8	φ3/4	φ7/8	φ7/8

Name		Equalizer side accessory pipe (1)	Equalizer side accessory pipe (2)	L type accessory joint (1)	L type accessory joint (2)
Quantity	72-96P type	1 pc.		1 pc.	2 pcs.
	120P type				
Shape			 φ3/4	 φ1	 φ3/4

Optional Accessories (For Unit)

REYQ72~240PYDN

Series			VRV III			
Optional accessories			REYQ72PYDN REYQ72PTJU	REYQ96PYDN REYQ96PTJU	REYQ144PYDN	REYQ192PYDN REYQ192PTJU
				REYQ120PYDN REYQ120PTJU	REYQ168PYDN REYQ168PTJU	REYQ216PYDN REYQ216PTJU
Optional accessories			REYQ144PTJU	REYQ240PYDN REYQ240PTJU		
Distributive piping	Refnet header	Model	KHRP25M33H (Max. 8 branch)	KHRP25M33H (Max. 8 branch) KHRP25M72H (Max. 8 branch)		KHRP25M33H (Max. 8 branch) KHRP25M72H (Max. 8 branch) KHRP25M73HU (Max. 8 branch)
	Refnet joint	Model	KHRP25A22T KHRP25A33T	KHRP25A22T KHRP25A33T KHRP25M72TU		KHRP25A22T KHRP25A33T KHRP25M72TU KHRP25M73TU
Outdoor unit multi connection piping kit		Model	—		BHFP26P90U	

3D059681A

Warning



- Daikin Industries, Ltd.'s products are manufactured for export to numerous countries throughout the world. Daikin Industries, Ltd. does not have control over which products are exported to and used in a particular country. Prior to purchase, please therefore confirm with your local authorized importer, distributor and/or retailer whether this product conforms to the applicable standards, and is suitable for use, in the region where the product will be used. This statement does not purport to exclude, restrict or modify the application of any local legislation.
- Ask a qualified installer or contractor to install this product. Do not try to install the product yourself. Improper installation can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Use only those parts and accessories supplied or specified by Daikin. Ask a qualified installer or contractor to install those parts and accessories. Use of unauthorized parts and accessories or improper installation of parts and accessories can result in water or refrigerant leakage, electrical shock, fire or explosion.
- Read the User's Manual carefully before using this product. The User's Manual provides important safety instructions and warnings. Be sure to follow these instructions and warnings.

If you have any inquiries, please contact your local importer, distributor and/or retailer.



© 2004 Daikin Industries, Limited.

Daikin®, Daikin AC™, Absolute Comfort™, VRV® and REFNET™ are trademarks pending or registered trademarks of Daikin Industries, Limited. All rights reserved. LONWORKS® and LON® are registered trademarks of Echelon Corporation. BACnet® is a Data Communication Protocol for Building Automation and Control Networks, developed under the auspices of the American Society of Heating, Refrigerating and Air-Conditioning Engineers (ASHRAE).



JMI-0107



JQA-1452

About ISO9001

ISO 9001 is a plant certification system defined by the International Organization for Standardization (ISO) relating to quality assurance. ISO 9001 certification covers quality assurance aspects related to the "design, development, manufacture, installation, and supplementary service" of products manufactured at the plant.



EC99J2044



JQA-E-90108

About ISO 14001

ISO 14001 is the standard defined by the International Organization for Standardization (ISO) relating to environmental management systems. Our group has been acknowledged by an internationally accredited compliance organisation as having an appropriate programme of environmental protection procedures and activities to meet the requirements of ISO 14001.

Dealer

DAIKIN AC (AMERICAS), INC.
1645 Wallace Drive, Suite 110
Carrollton, TX75006
info@daikinac.com
www.daikinac.com

©All rights reserved

● Specifications, designs and other content appearing in this brochure are current as of June 2008 but subject to change without notice.