

Submittal Data Sheet

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
	Date: Construction: Unit #:

Performance

Indoor Unit Model No:	FXMQ96MVJU
Cooling Capacity (Btu/hr):	96000
Sensible Capacity (Btu/hr):	70970
Cooling Input Power (kW):	1.684
Heating Capacity (Btu/hr):	108000
Heating Input Power (kW):	1.684
Nominal Ext Static Pressure (inH2O):	0.43
Max Ext Static Pressure (inH2O):	0.95

Indoor Unit Details

indoor onit betails	
Power Supply (V/Hz/Ph:)	208-230/60/1ph
Power Supply Connections:	L1, L2, Ground
Min. Circuit Amps MCA (A):	10.7
Max. Fusible Amps MFA (A):	15
Dimensions (HxWxD):	18-1/8x54-3/8x43-5/16
Panel (HxWxD):	N/A
Net Weight (lbs):	302
Weight with Panel (lbs):	

Indoor Unit Type:	Duct Mounted Medium Static
Cooling Nominal Conditions	Indoor: 80°F DB/67°F WB
	Outdoor: 95°F DB/75°F WB
Heating Nominal Conditions	Indoor: 70°F DB/60°F WB
	Outdoor: 47°F DB/43°F WB
Nominal Piping Length	25
Nominal Height Separation	0

Airflow Rate (CFM wet coil)	2541//2188
Moisture Removal (pt/h):	
Gas Pipe Connection (inch):	7/8
Liquid Pipe Connection (inch):	3/8
Condensate Connection (inch):	1
Sound Pressure Level (dBA):	48
Sound Power Level (dBA):	

Appearance - Indoor Unit






Submittal Data Sheet

Project Name:		
Location:	Approval:	
Engineer:	Date:	
Submitted to:	Construction:	
Submitted by:	Unit #:	
Reference:	Drawing #:	

Dimensional Drawing - Indoor Unit

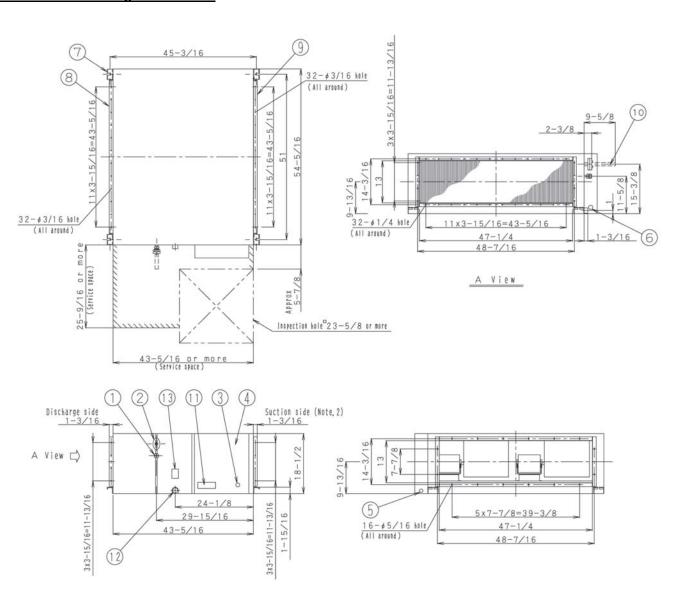



Submittal Data Sheet

Approval:	
Date:	
Construction:	
Unit #:	
Drawing #:	
	Date: Construction: Unit #:

Notes

Std U.S. Warranty: 6yrs Compressor, 1yrs Parts, 1yr Limited Labor